

SoLID Baffle and Background Update



Zhiwen Zhao

UVa


2013/08/19

Beamline change

- Wider opening
- 1st baffle plane in beamline

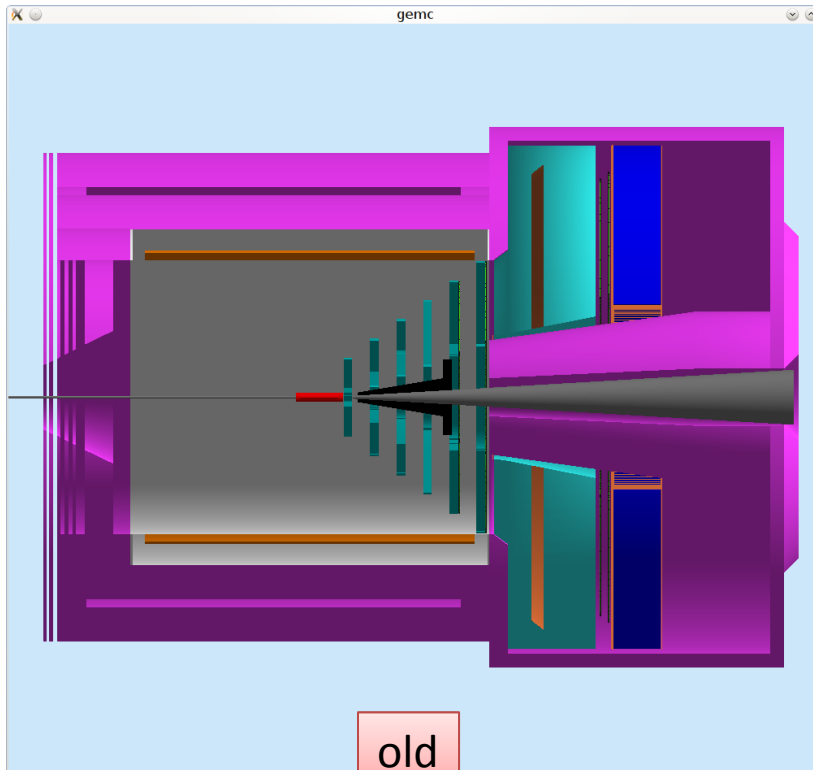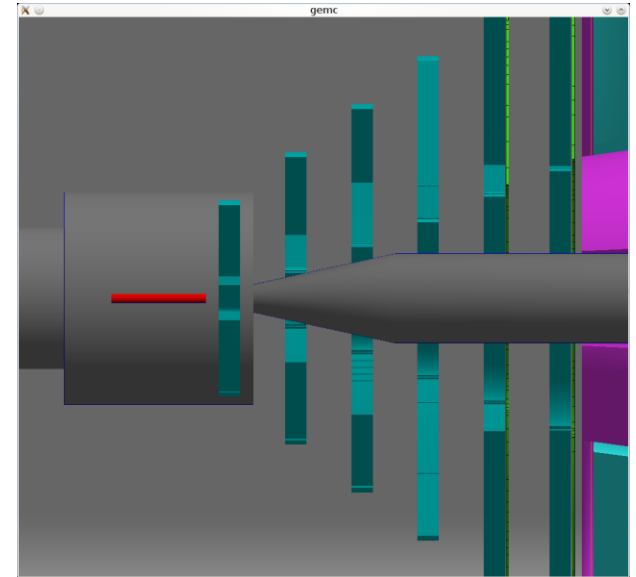


old

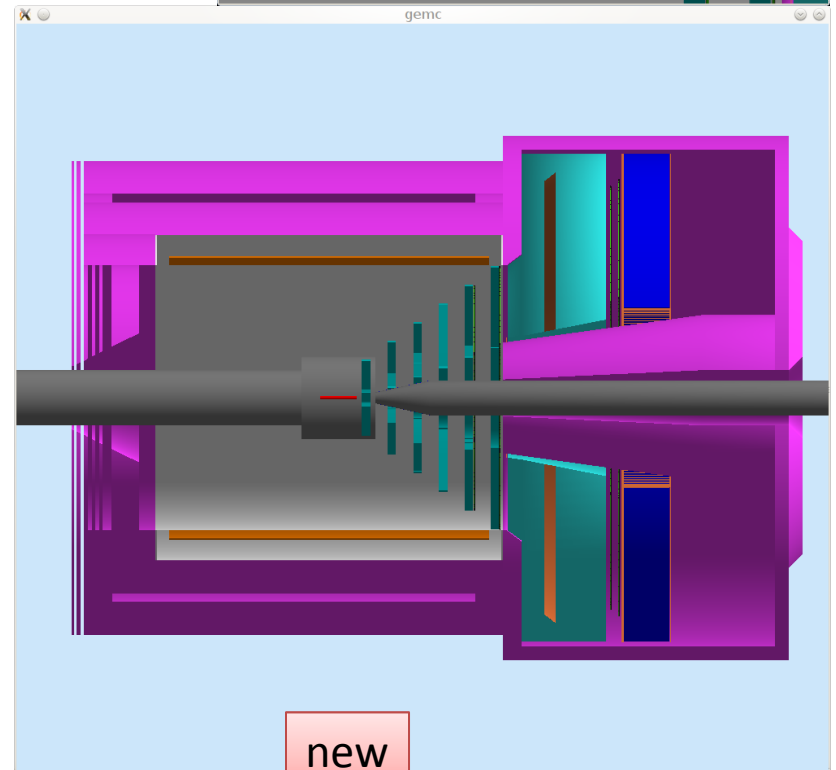


new

Old, 1st baffle plane 4cm inner radius, vertex of photon hits on EC


vertex_8_1

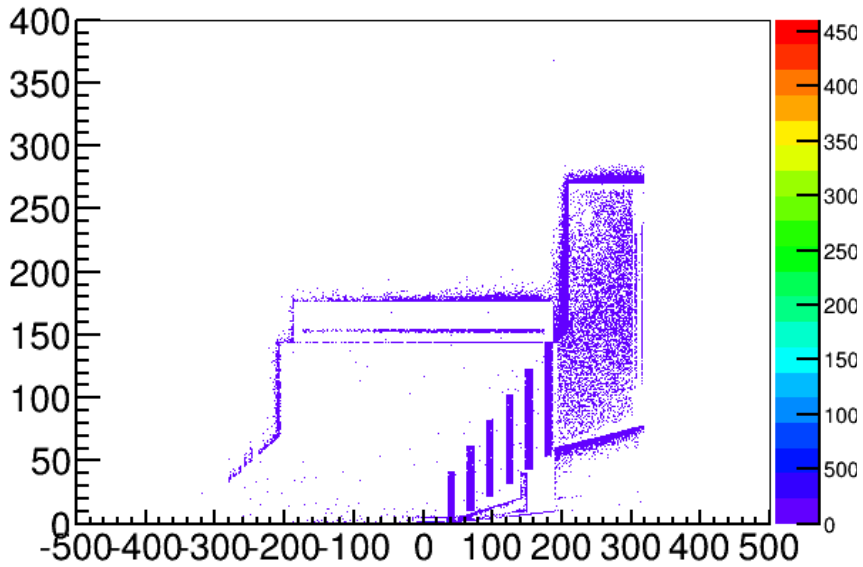


vertex_8_1

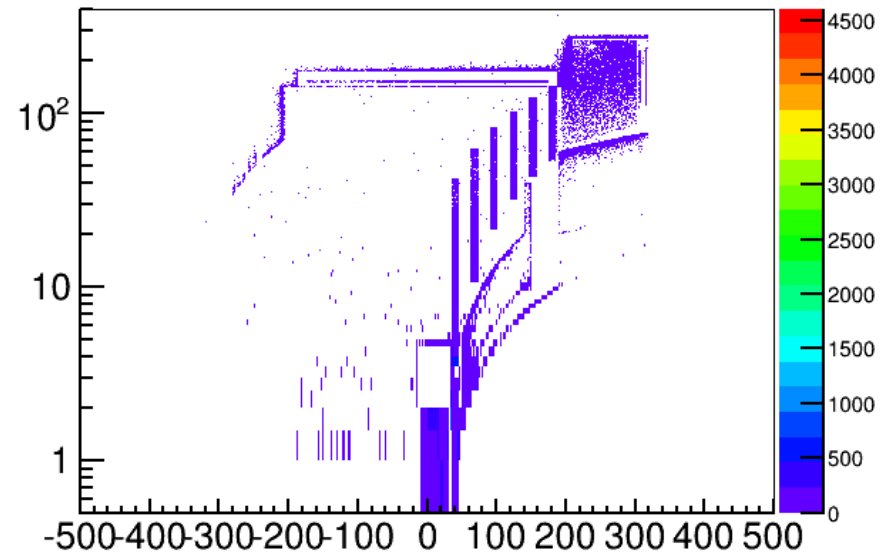


vertexZ_8_1

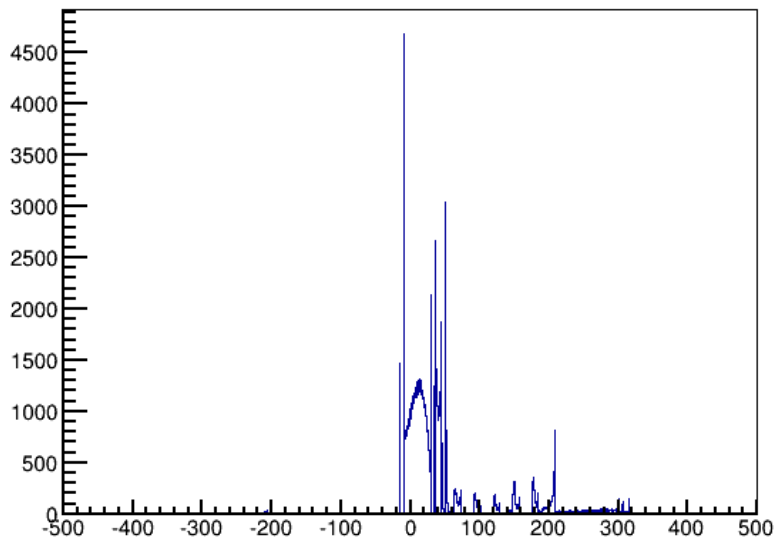


vertexZ_8_1

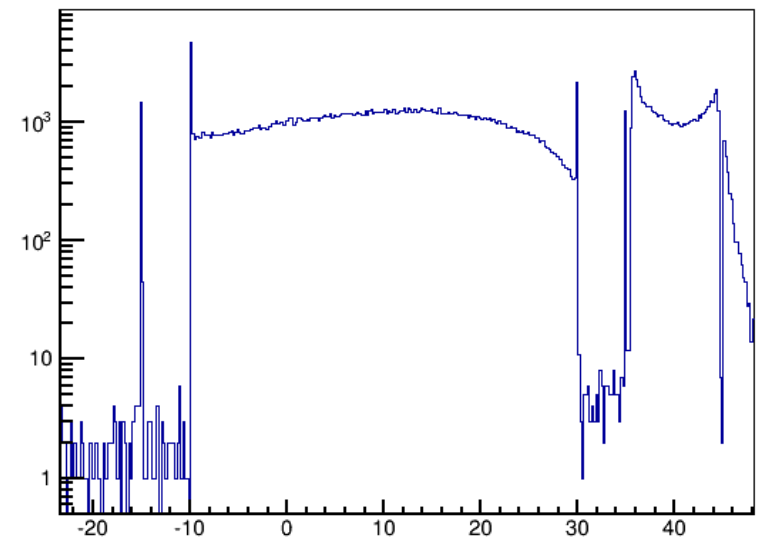

Photon background on EC


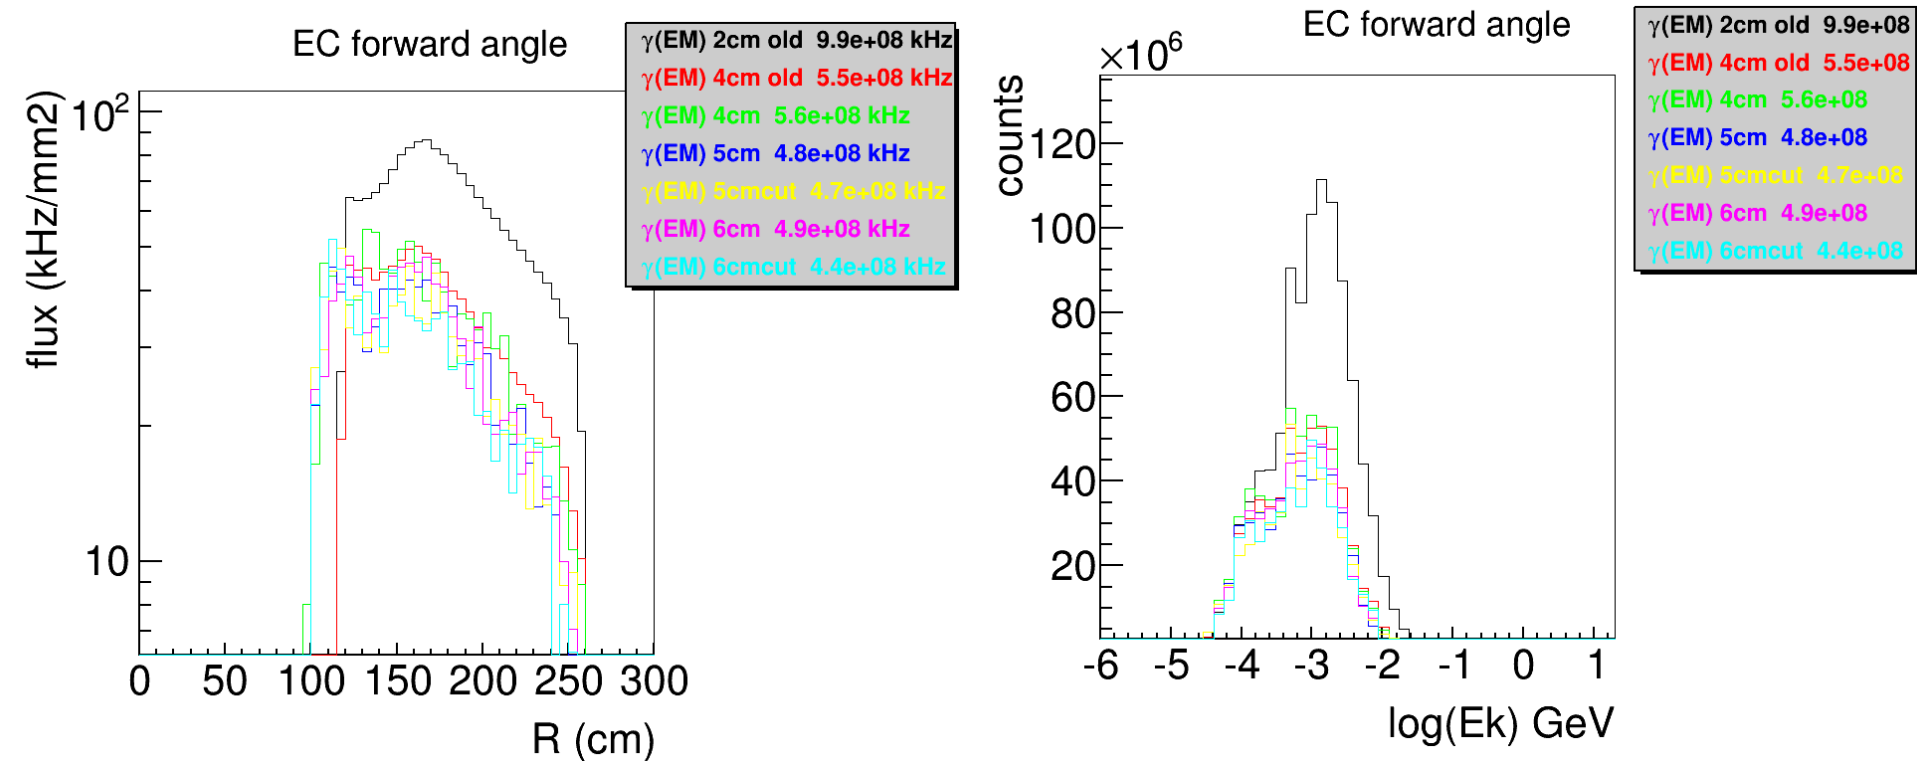


Photon background on CC entrance

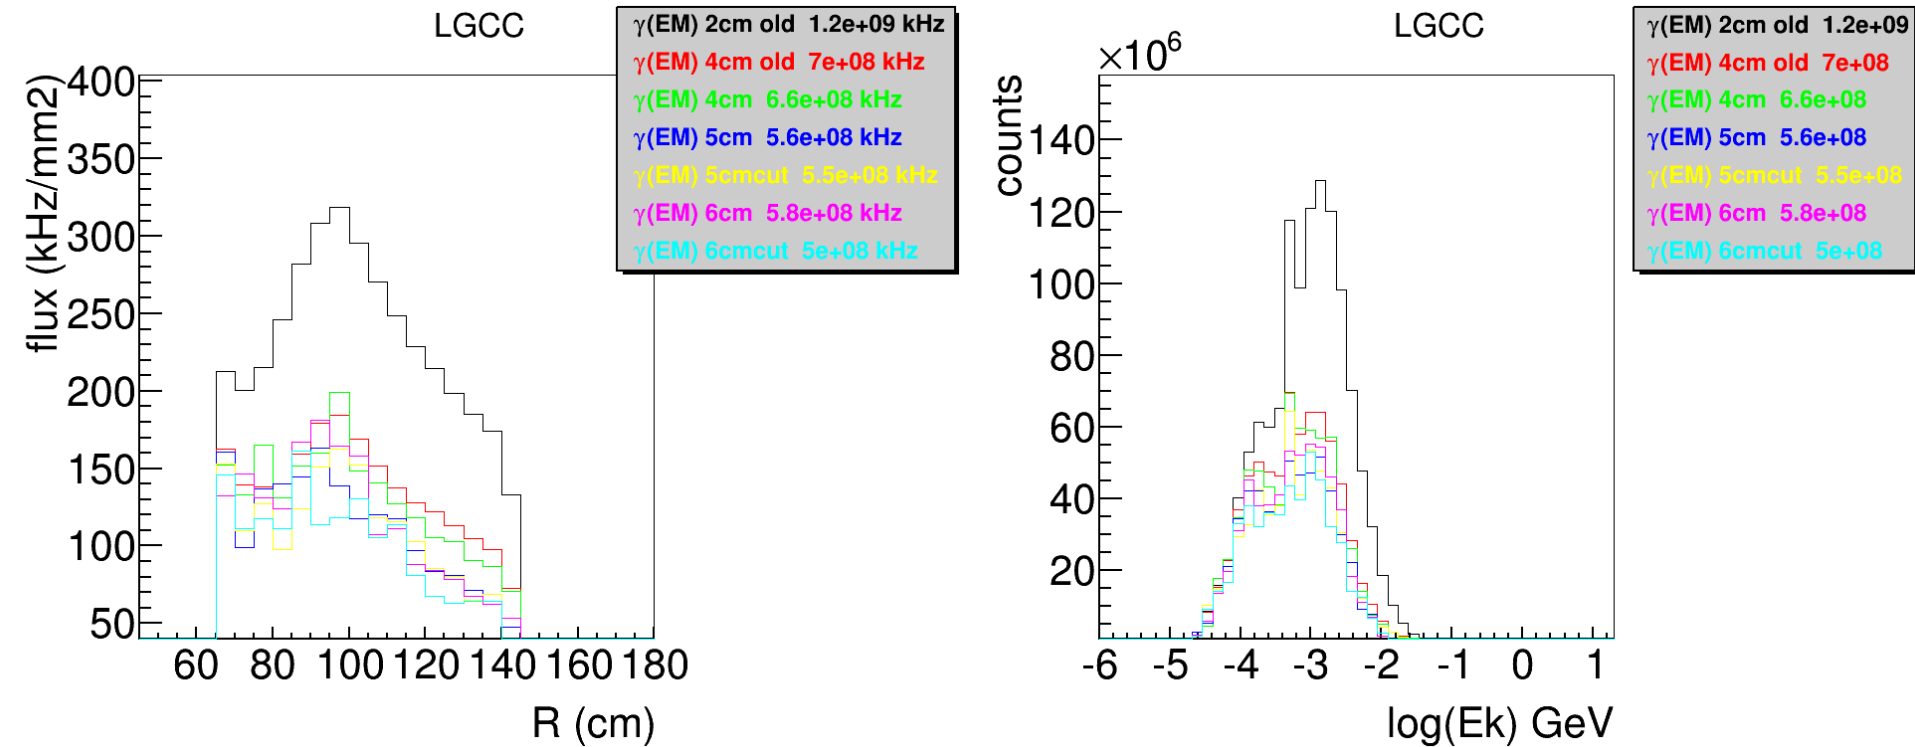


Apv Error

- 50uA 85% polarized 11GeV beam on 40cm LD2 for 120 days

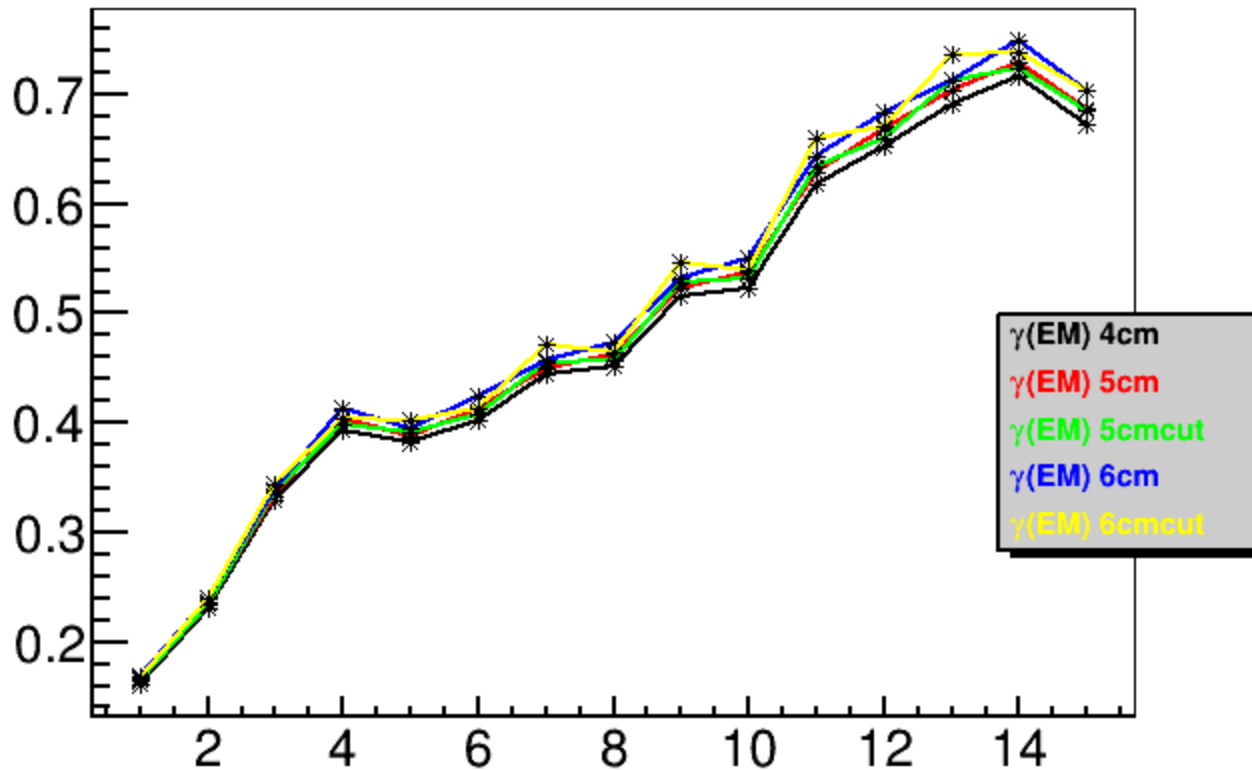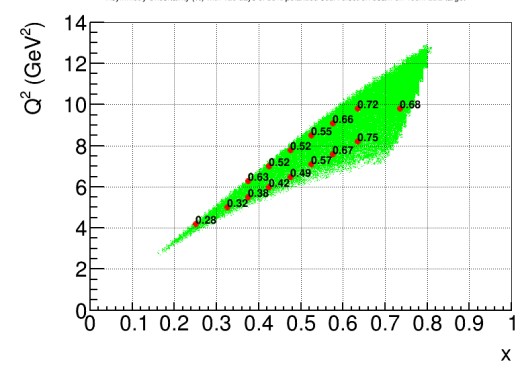

backup

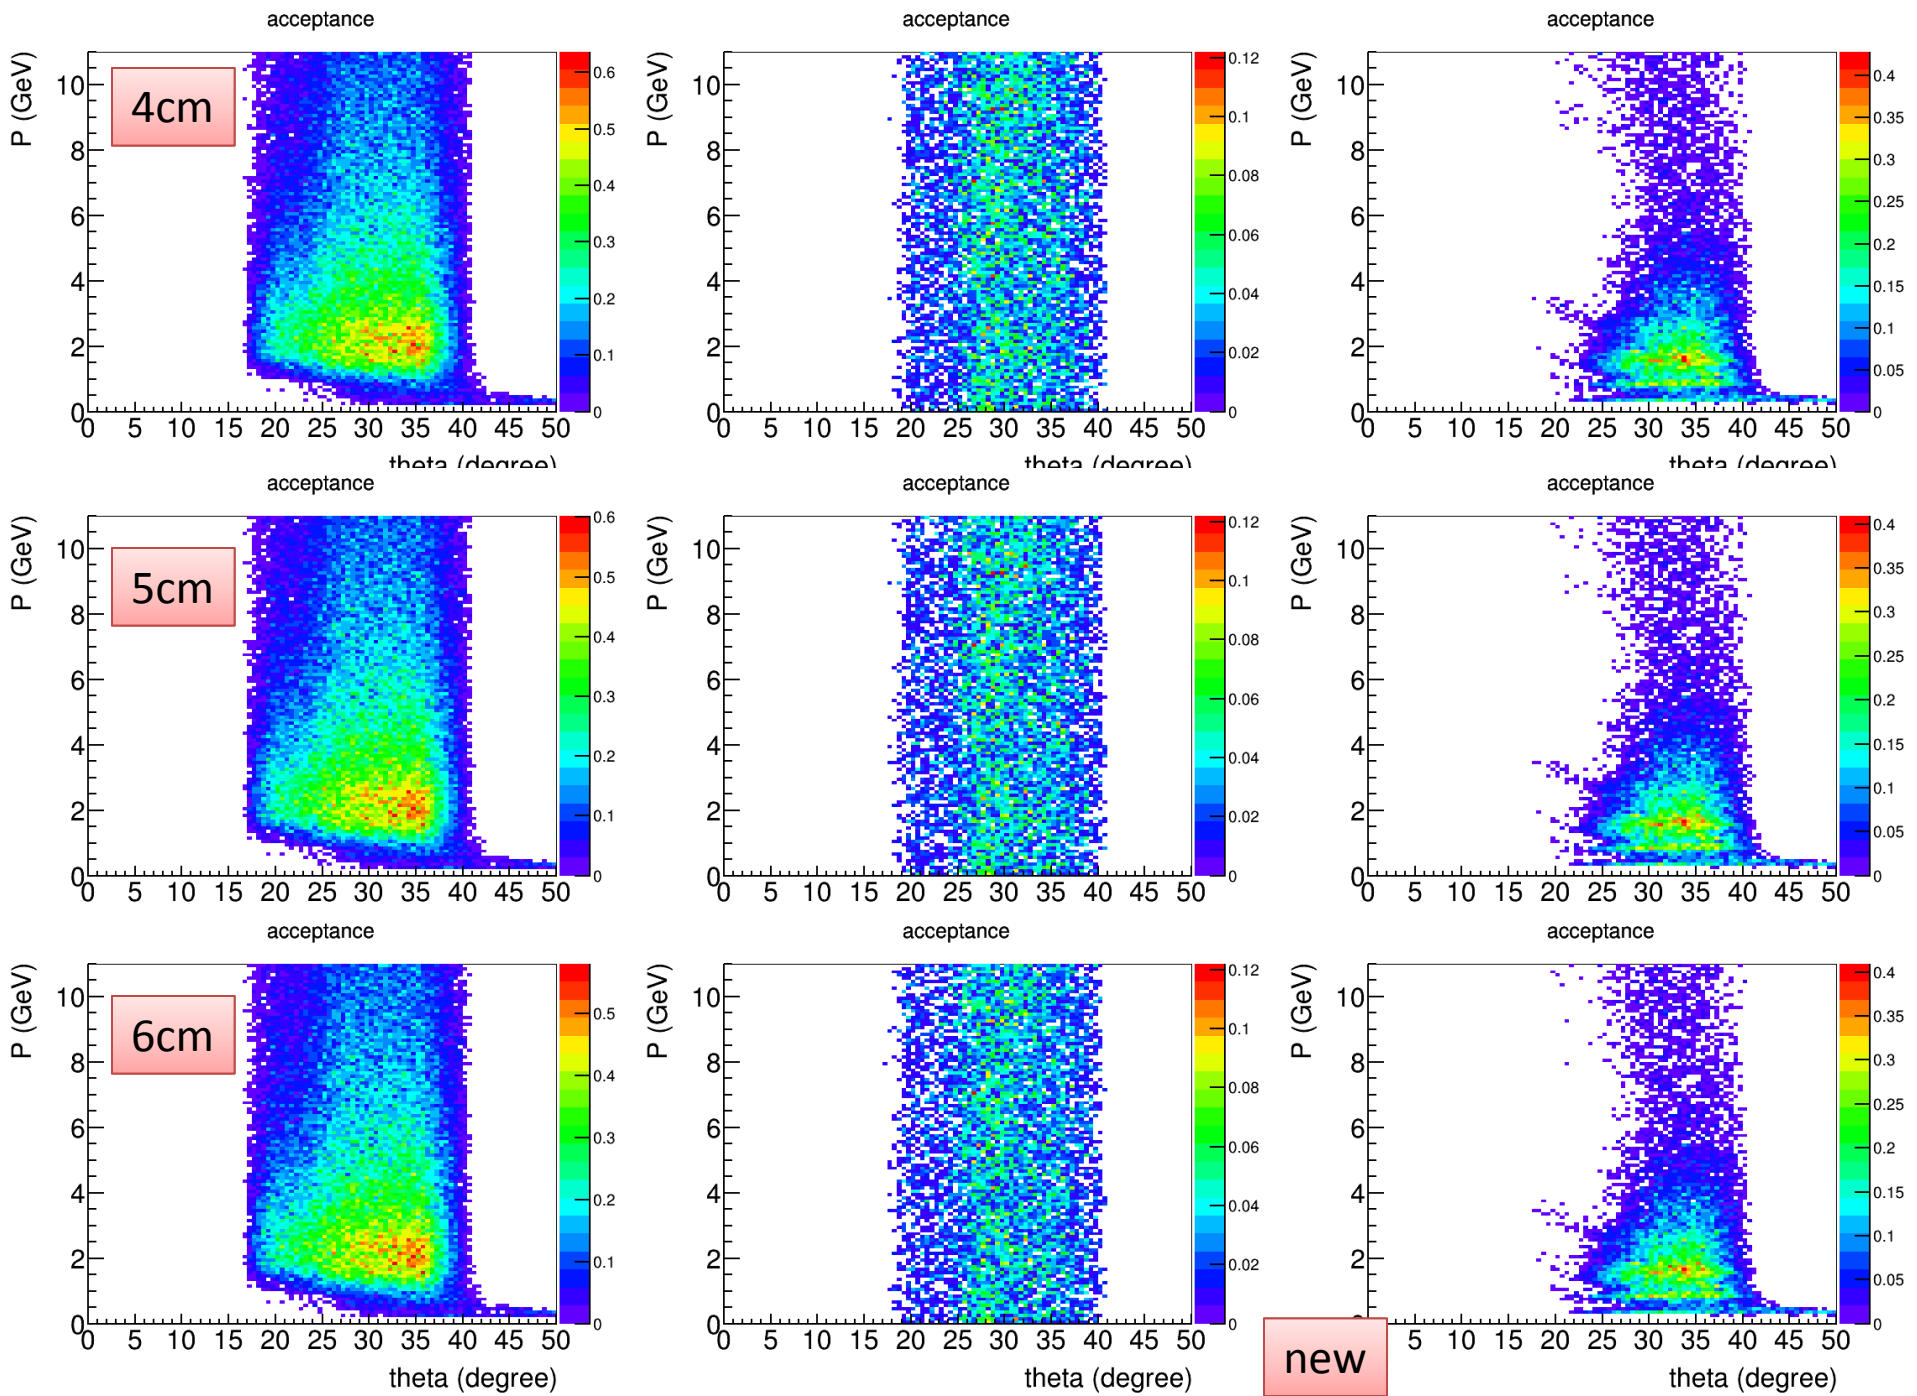

- 0.161644,0.231055,0.329848,0.393631,0.381304,0.402923,0.444411,0.451902,0.515566,0.522944,0.618568,0.652265,0.690853,0.71636,0.671794,
- 0.164413,0.235338,0.333069,0.404199,0.387706,0.412338,0.448797,0.462425,0.522628,0.536542,0.628935,0.668761,0.703644,0.729922,0.686632,
- 0.163825,0.234228,0.336066,0.398247,0.391227,0.406999,0.455733,0.45735,0.528566,0.531069,0.634894,0.660711,0.712002,0.724154,0.685685,
- 0.167824,0.240154,0.337932,0.413281,0.394852,0.423446,0.456356,0.474092,0.531722,0.550273,0.642587,0.684308,0.713186,0.749728,0.704103,
- 0.1664,0.238763,0.343673,0.403243,0.402984,0.412821,0.47212,0.464244,0.546446,0.538517,0.659431,0.67116,0.735684,0.738418,0.704104,

PVDIS challenge

- High luminosity ($1.27e^{39}/\text{cm}^2/\text{s}$ for 50uA on 40cm LD2 target) causes high rate and high energy dose on detectors
- Baffle shields low energy EM photons directly from target while low energy electrons are bent away by field
- Most interesting physics at high Q^2 and high x needs DIS electrons with highest energy which bend least and fly like photons, so comprise is needed
- Positive pions contribute in background at trigger level and are better to be suppressed


Design Condition

- SoLID latest CLEOv8 field map
- 30 sectors with each sector covering 12 deg
- each plate is 9cm thick lead
- Z (40, 68, 96, 124, 152, 180) cm
 - no overlap with current setup
- Rin (4.00, 12.86, 23.61, 34.36, 45.10, 55.85)cm
- Rout (39.60, 59.94, 80.28, 100.63, 120.97, 141.31)cm
 - Optimized for polar angle 21-36 deg acceptance of full 40cm long target with center at 10cm, except the first baffle inner radius needs to be at 4cm instead of 2cm to avoid more EM background

Current Baffle

(Smaller Z baffle cut inner)

- Continue with Seamus's approach, but take all design conditions into account
 - refer to
 - https://hallaweb.jlab.org/wiki/index.php/Baffle_Design
 - https://hallaweb.jlab.org/wiki/index.php/Solid_design_FOM



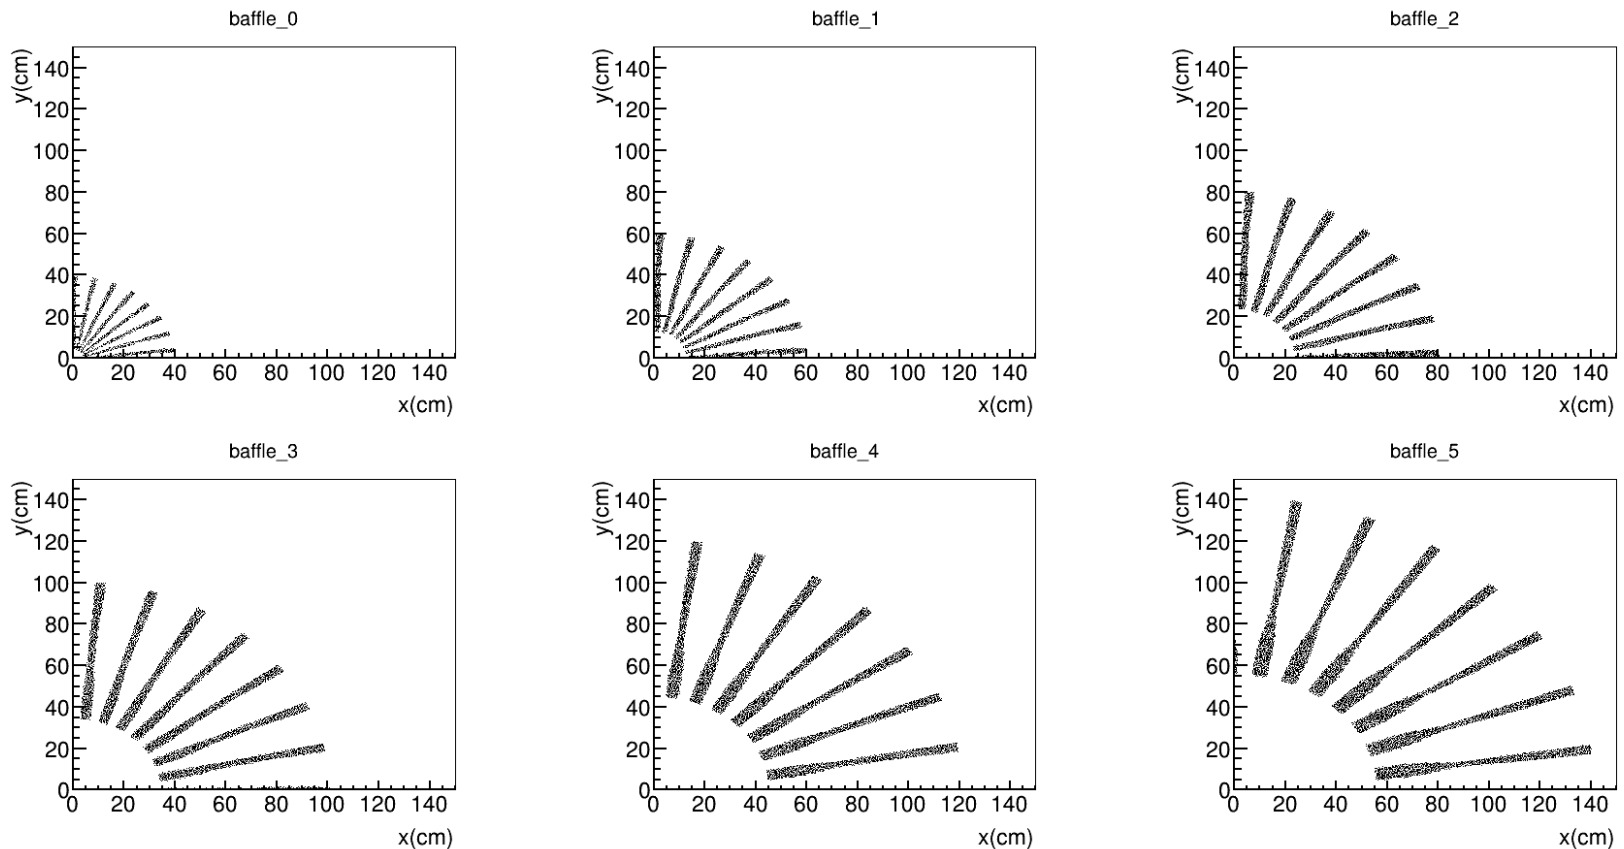


General acceptance



negative

neutral

positive

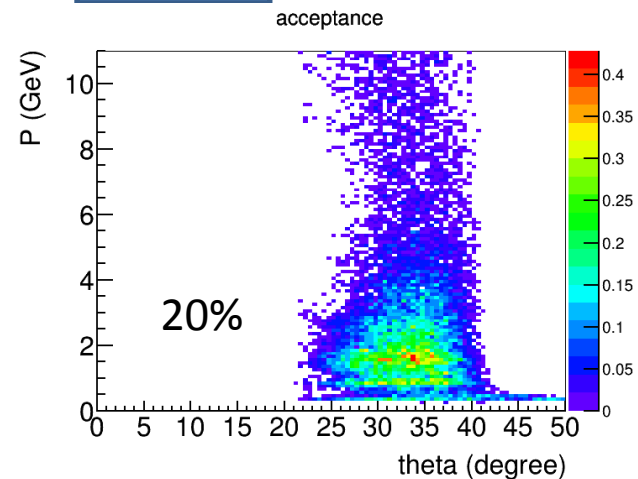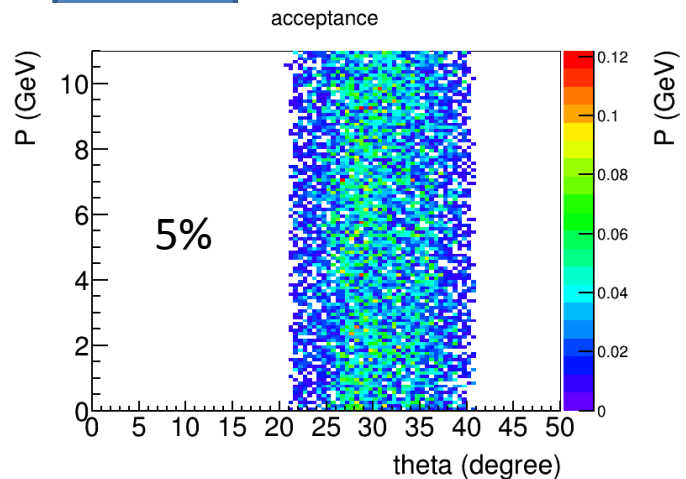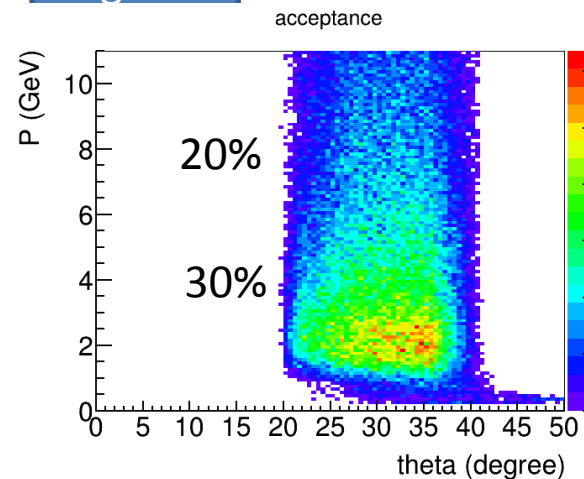


eDIS acceptance

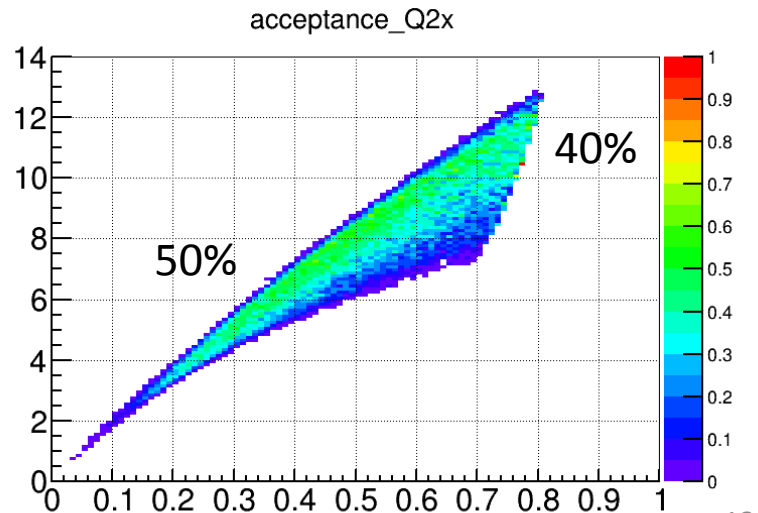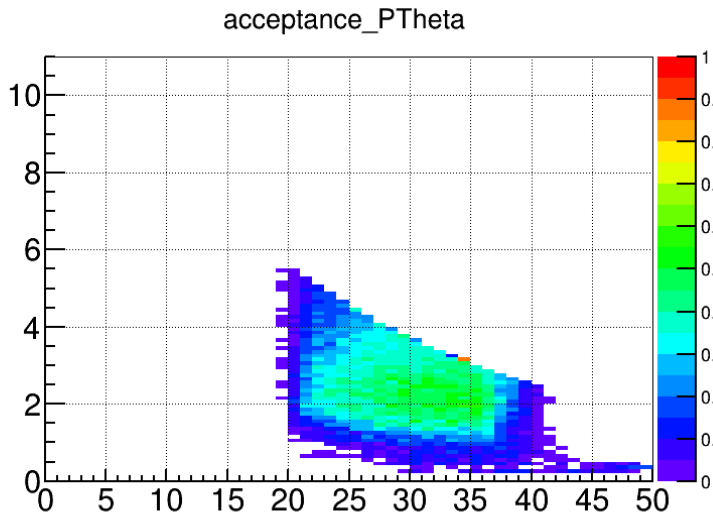

Apv Error

- 50uA 85% polarized 11GeV beam on 40cm LD2 for 120 days
- Trigger at 2GeV

BaBar field and baffle, from proposal

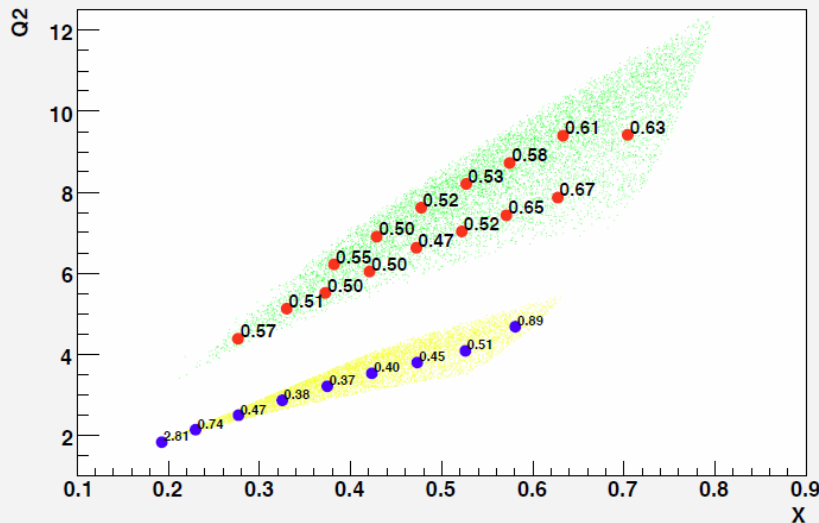

CLEO field and baffle, from proposal



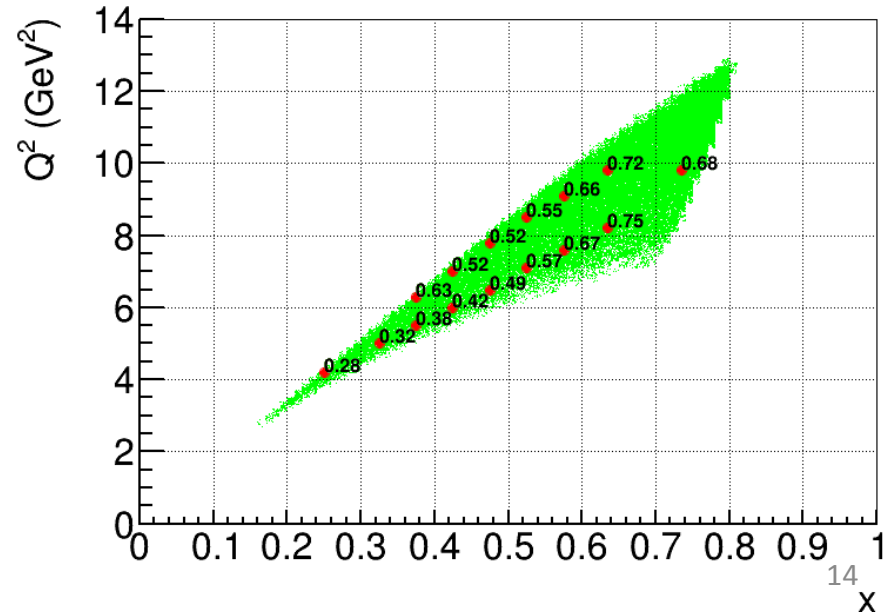


Figure 4: Anticipated statistical precision for Solid

Trigger effect

ApvErr	trigger (GeV)
0.17,0.24,0.36,0.38,0.42,0.39,0.48,0.44,0.56,0.51,0.66,0.64,0.75,0.70,0.67	0.0
0.20,0.26,0.36,0.40,0.42,0.40,0.48,0.44,0.56,0.51,0.66,0.64,0.75,0.70,0.67	1.5
0.27,0.31,0.37,0.62,0.45,0.51,0.48,0.51,0.56,0.54,0.66,0.65,0.75,0.70,0.67	2.0
0.38,0.37,0.39,0.96,0.42,0.74,0.48,0.65,0.56,0.65,0.66,0.75,0.75,0.74,0.67	2.3
0.53,0.43,0.43,1.46,0.44,1.03,0.48,0.86,0.56,0.80,0.66,0.89,0.75,0.83,0.69	2.5
2.13,0.84,0.63,0.00,0.56,9.22,0.56,2.83,0.60,2.14,0.68,1.97,0.75,1.40,0.81	3.0

ApvErr at large Q2 and large x starts to increase if trigger > 2GeV

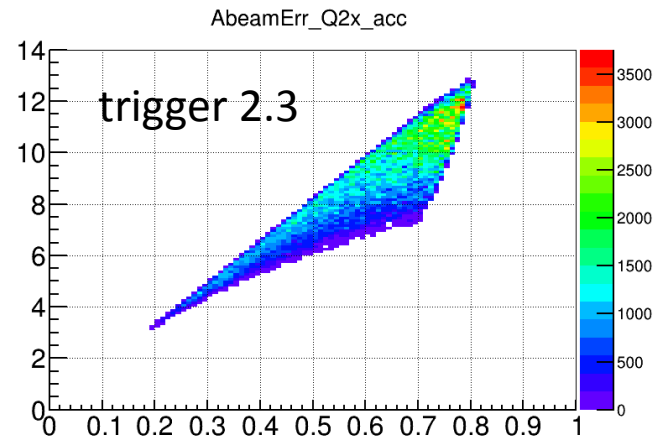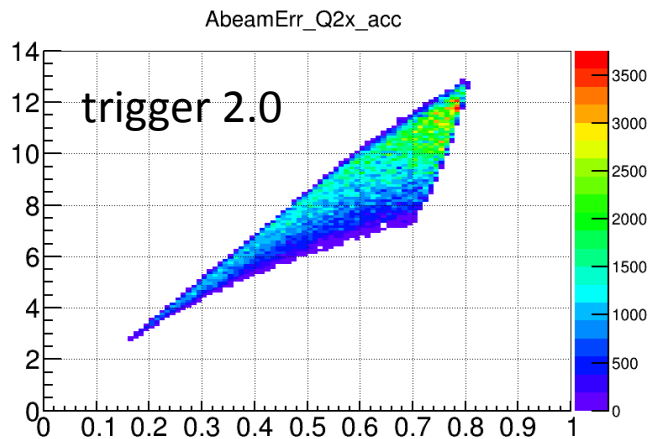

Trigger effect

ApvErr

0.28,0.32,0.38,0.63,0.42,0.52,0.49,0.52,0.57,0.55,0.67,0.66,0.75,0.72,0.68

1.90,0.58,0.44,0.72,0.43,0.53,0.49,0.52,0.57,0.55,0.67,0.66,0.75,0.72,0.68

0.52,0.42,0.41,0.72,0.43,0.53,0.49,0.52,0.57,0.55,0.67,0.66,0.75,0.72,0.68

This could an option for trigger

trigger (GeV)

$p < 2.0$, $r(110\text{cm} - 270\text{cm})$



$p < 3.0$, $r(110\text{cm} - 140\text{cm})$

$p < 2.5$, $r(140\text{cm} - 170\text{cm})$




$p < 2.0$, $r(170\text{cm} - 270\text{cm})$

$p < 2.5$, $r(110\text{cm} - 170\text{cm})$



$p < 2.0$, $r(170\text{cm} - 270\text{cm})$

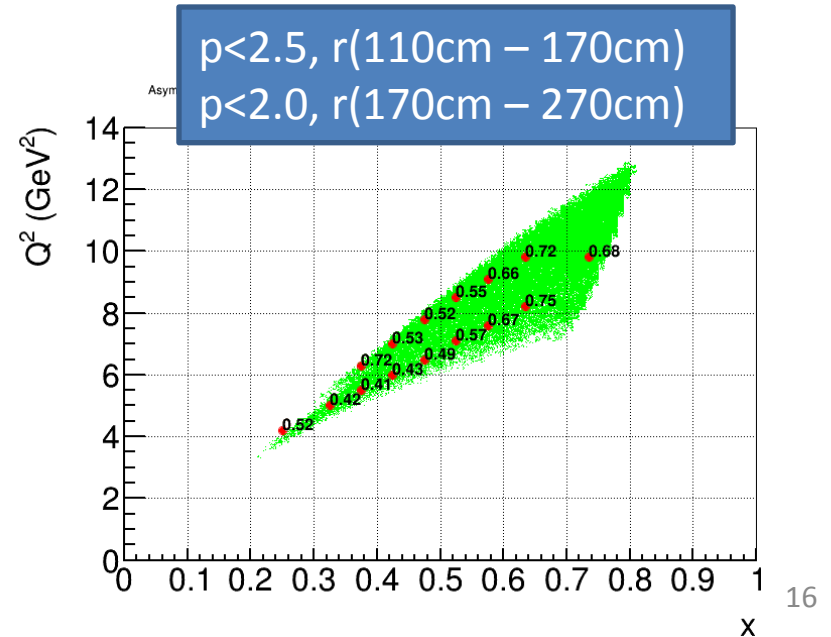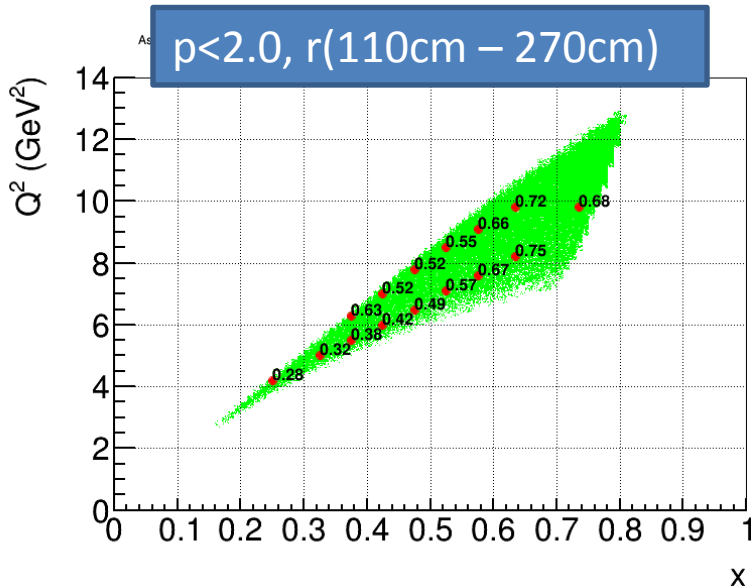


Background, baffle effect

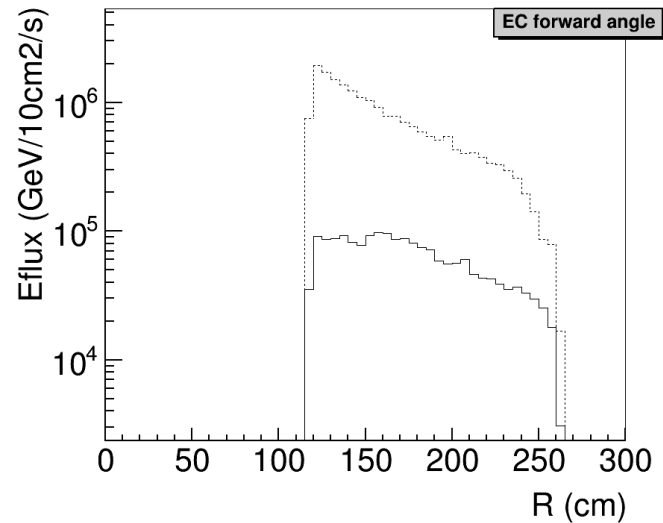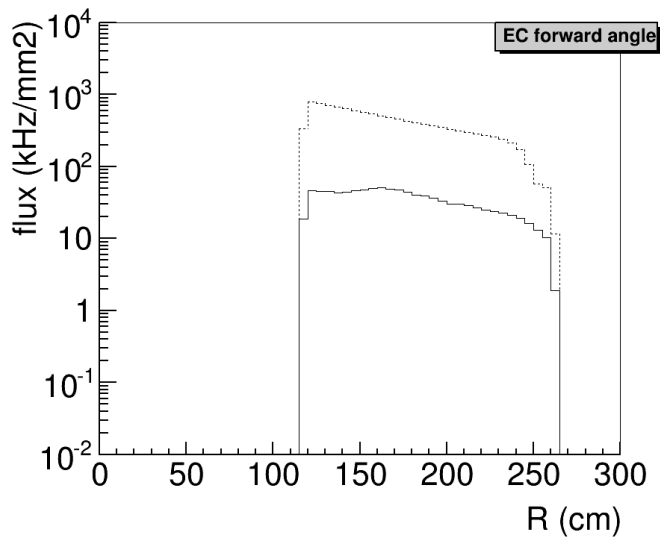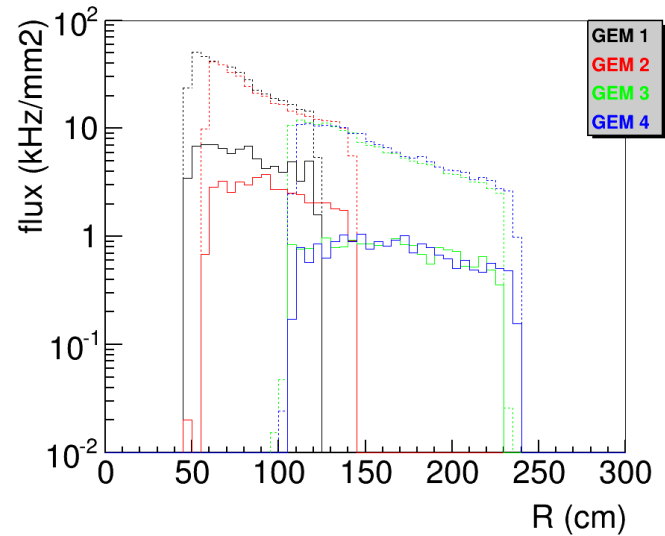

Hit on EC in R(physics+background)

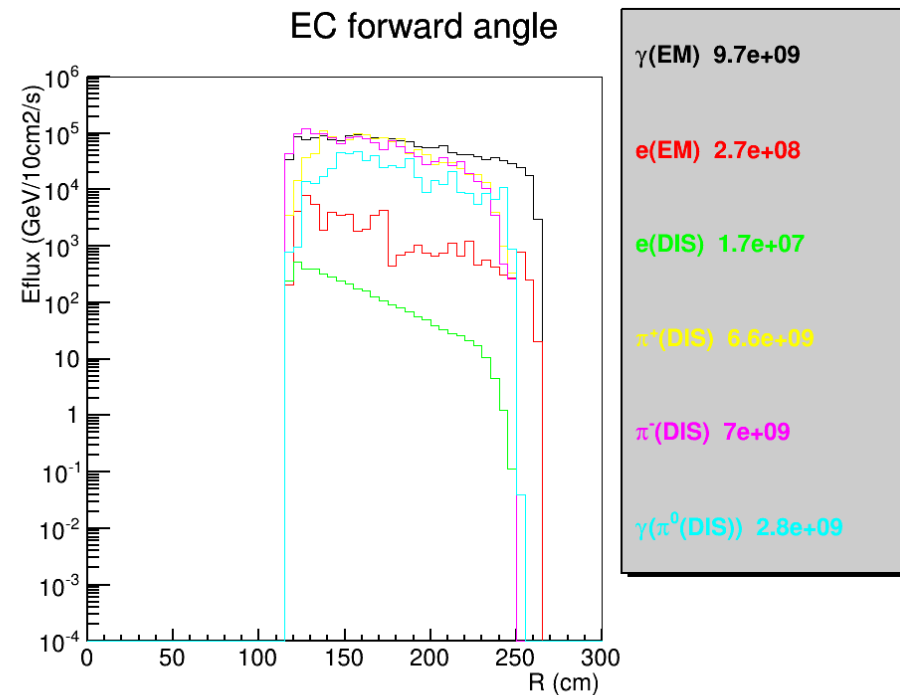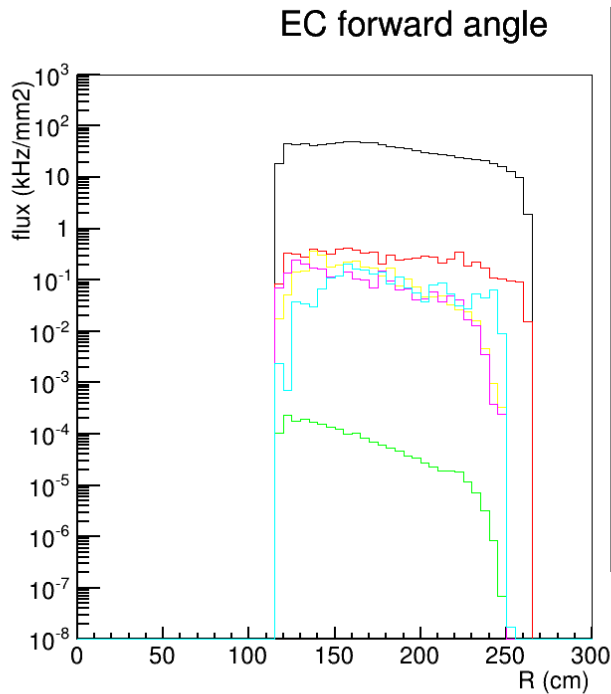

Hit on EC in Phi(physics+background)

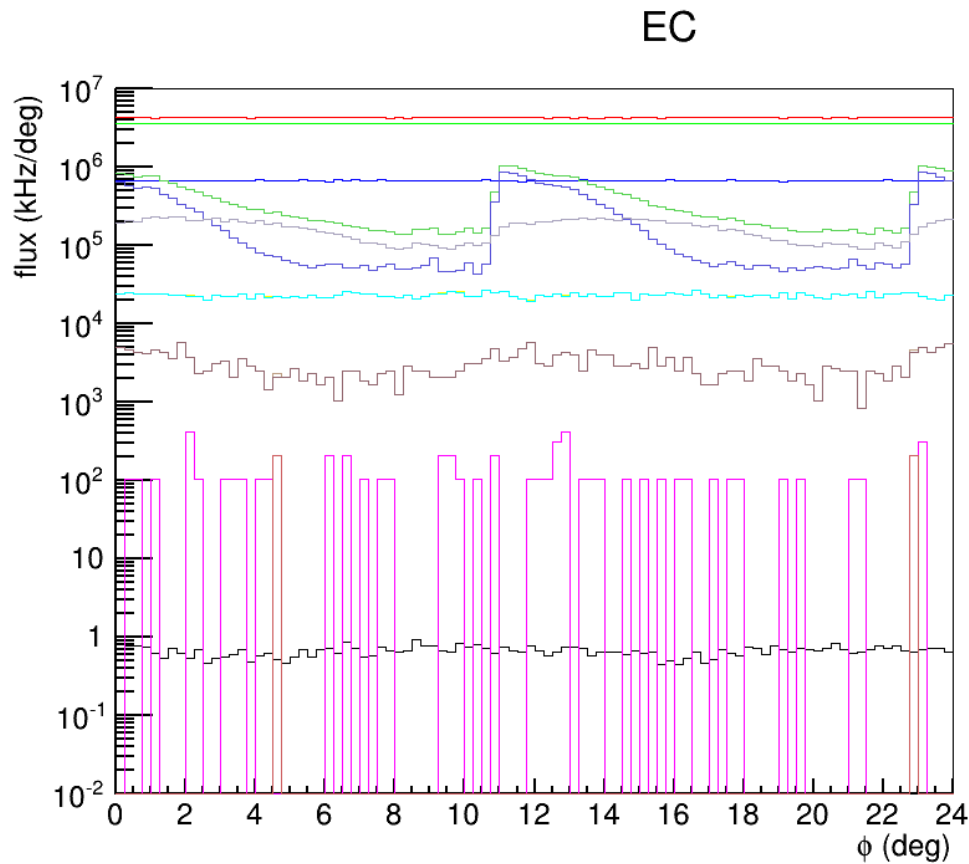

e(DIS)	16
γ (EM) nobaffle total	1e+08
γ (EM) nobaffle target	8.5e+07
γ (EM) nobaffle other	1.6e+07
e(EM) nobaffle total	5.5e+05
e(EM) nobaffle target	1.5e+03
e(EM) nobaffle other	5.5e+05
γ (EM) baffle total	8.9e+06
γ (EM) baffle target	5.1e+06
γ (EM) baffle other	3.8e+06
e(EM) baffle total	7.1e+04
e(EM) baffle target	1e+02
e(EM) baffle other	7e+04

GEM geometry

PVDIS GEM

id	Z (cm)	PVDIS target center		PVDIS target full	
		R range (cm)	Area (m2)	R range (cm)	Area (m2)
1	157.5	56-107	2.6116	48-122	3.9521
2	185.5	67-128	3.7369	59-143	5.3307
3	306	113-215	10.5105	105-230	13.1554
4	315	117-222	11.1824	109-237	13.9135
total			28.0414		36.3517

- CLEO coil center at 0.
- PVDIS 40cm long target with center at 10cm
- PVDIS angle 21-36 degree
- Considering the CLEO baffle, plane 1 and 2 are directly behind baffle and only need partial coverage (70-80%?), plane 3 and 4 are between Cherenkov and EC and need full coverage
- To cover full target, GEM needs to increase by 30%

SIDIS/JPsi GEM

id	z (cm)	SIDIS target center		SIDIS target full		JPsi target center			
		R range (cm)	Area (m2)	R range (cm)	Area (m2)	R range needed (cm)	Area needed (m2)	Area addition to "SIDIS target center" (m2)	Area addition to "SIDIS target full" (m2)
1	-175	46-78	1.2466	41-87	1.8498	36-67	1.0031	0.2576	0.1210
2	-150	26-91	2.3892	23-98	2.8510	21-80	1.8720	0.0738	0.0276
3	-119	30-103	3.0502	27-112	3.7118	25-97	2.7595	0.0864	0.0327
4	-68	37-126	4.5575	34-135	5.3624	32-123	4.4312	0.1084	0.0415
5	5	46-95	2.1705	44-100	2.5334	42-90	1.9905	0.1106	0.0540
6	92	58-118	3.3175	55-123	3.8026	55-115	3.2044	0.1065	0.0000
total			16.7315		20.1110		15.2607	0.7433 (4.5%)	0.2768 (1.4%)

- CLEO coil center at 0.
- Plane (1,2,3,4) cover large angle and plane (2,3,4,5,6) cover forward angle
- SIDIS 40cm long target with center at -350cm, SIDIS angle 7.5-14.85-24 degree
- JPsi 15cm long target with center at -300cm tentatively, JPsi angle 8- 16.28-28 degree
- Jpsi coverage is only optimized by target center as it's length is smaller
- GEM size determined by "Jpsi target center" inner and "SIDIS target full" outer
- PVDIS has more than enough GEM for SIDIS/JPsi to cover full target

backup


Design Detail

- Common
 - use SoLID CLEOv8 field map
 - 30 sectors with each sector covering 12 deg
 - Still each plate is 9cm thick of lead
 - SCALE MIN=1.4, MAX=1.4, LASTBAF=0. in makebaf5.C
- Larger Z baffle only
 - Z (40, 70, 100, 130, 160, 190) cm
 - overlap with Cherenkov and leaves no room for GEM
 - Rin (3.90, 15.30, 26.60, 37.90, 49.20, 61.01)cm
 - Rout (41.31, 62.32, 83.32, 104.33, 125.34, 142.00)cm
 - Not optimized for polar angle 21-36 deg acceptance of full 40cm long target with center at 10cm
- Smaller Z baffle only
 - Z (40, 68, 96, 124, 152, 180) cm
 - no overlap with current setup
 - Rin (2.11, 12.86, 23.61, 34.36, 45.10, 55.85)cm
 - Rout (39.60, 59.94, 80.28, 100.63, 120.97, 141.31)cm
 - Optimized for polar angle 21-36 deg acceptance of full 40cm long target with center at 10cm

Design approach

from larger Z baffle to smaller Z baffle

- Continue with Seamus's approach
 - In simulation, throw negative particles from target position with field, record tracks at different position
 - Then do linear fitting to figure out what kind of blocking should be at the assumed baffle plates position.
 - Output the opening (not block)
 - refer to
 - https://hallaweb.jlab.org/wiki/index.php/Baffle_Design
 - https://hallaweb.jlab.org/wiki/index.php/Solid_design_FOM
- Fix a bug of detector plane position in the input file
- Change Z, Rin, Rout to the desired values

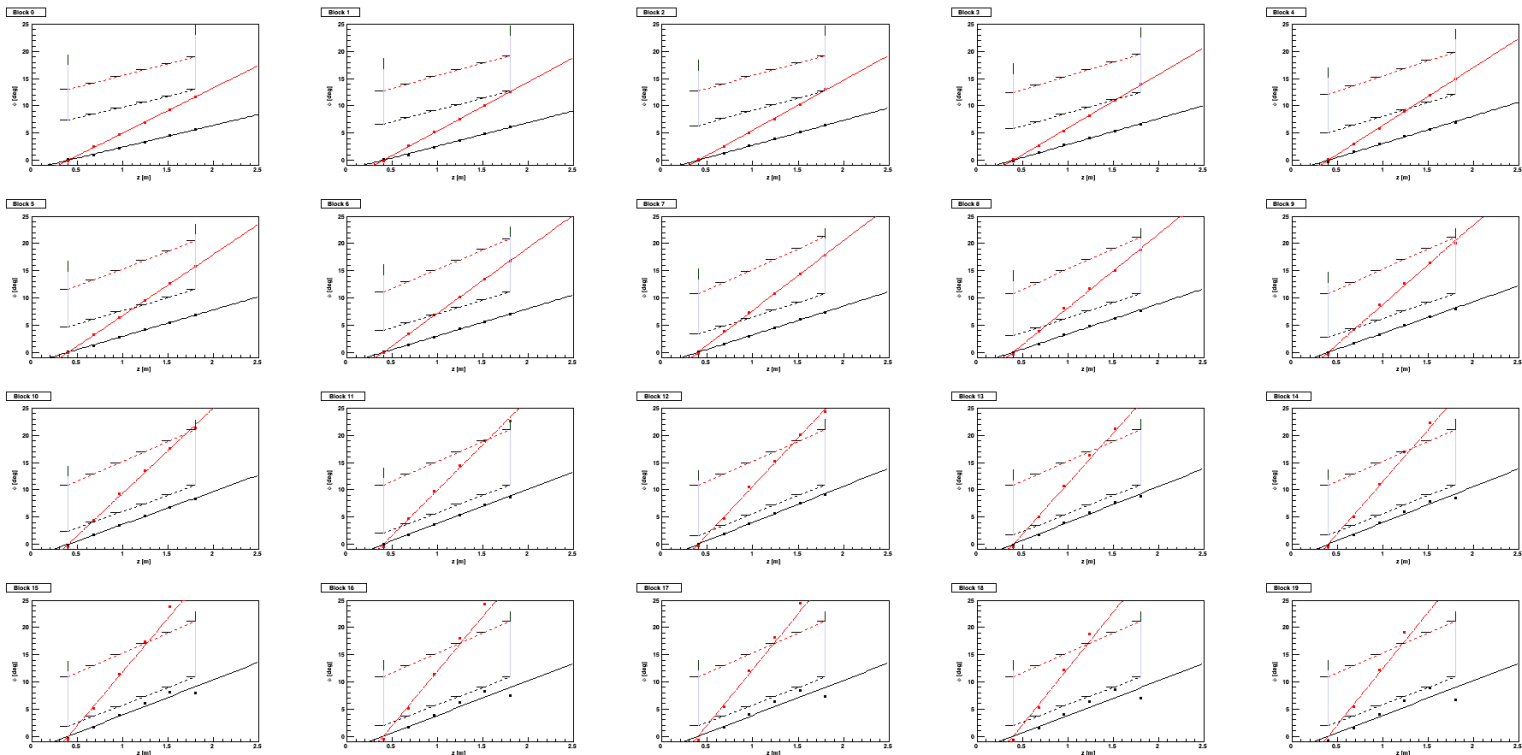

eDIS rate

rate_Q2x_acc

