


### APPLICATIONS


- Compassing
- Navigation Systems
- Attitude Reference
- Virtual Reality
- Traffic Detection
- Proximity Detection
- Medical Devices

# Three-Axis Magnetoresistive Sensor

## HMC1023

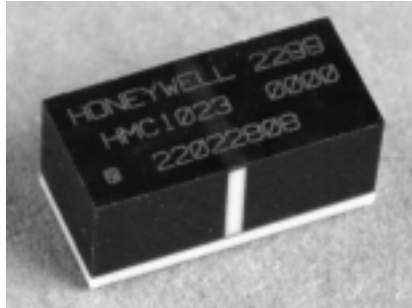

Not actual size





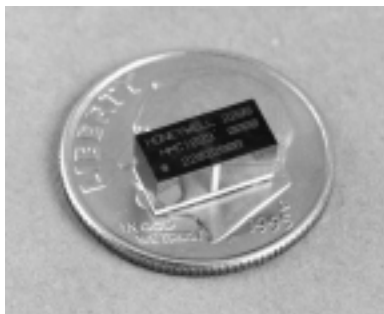


Configured as three magnetoresistive sensors in x, y and z orientation, these highly sensitive sensors convert all three magnetic field axes to a differential output voltage. This new addition to our line of magnetoresistive sensors is smaller, uses less power and is ideal for applications that require orthogonal three-axis sensing.

## FEATURES AND BENEFITS

<b>Wide Field Range</b>	Field range of $\pm 6$ gauss, (earth's field = 0.5 gauss) while maintaining high sensitivity with a minimal detectable field down to 85 $\mu$ gauss.
<b>Small Package</b>	Designed to work as a single stand alone three-axis (x,y,z) magnetoresistive sensing system. Custom Ball Grid Array (BGA), 1mm pitch, 16-pin miniature package provides a small footprint and accurate sensor placement for orthogonal three-axis sensing applications.
<b>Solid State</b>	This small device reduces board assembly costs, improves reliability and ruggedness compared to mechanical fluxgates.
<b>Low Power</b>	The patented on-chip set/reset and offset straps have been improved and now require 50% less power to drive the set-reset and offset functions. This sensor can be operated with a 3 to 25 volt power supply, lowering power consumption and reducing support circuitry.
<b>Cost Effective</b>	The sensors were specifically designed to be affordable for high volume OEM applications.


## MR SENSOR CIRCUIT / PINOUT SPECIFICATIONS

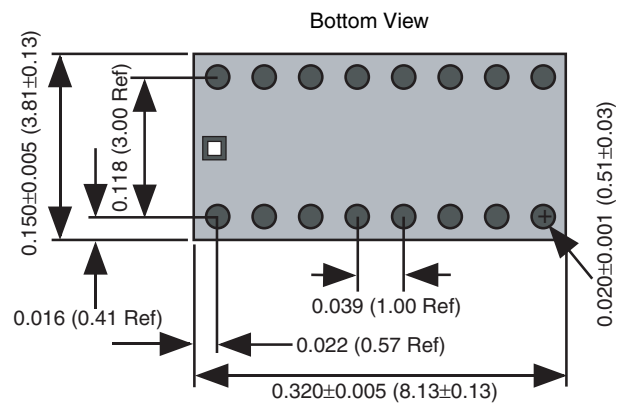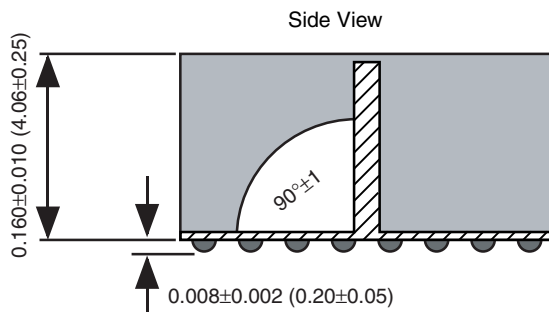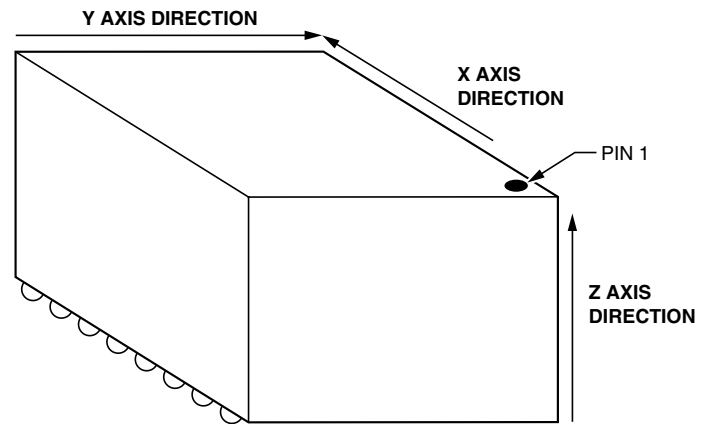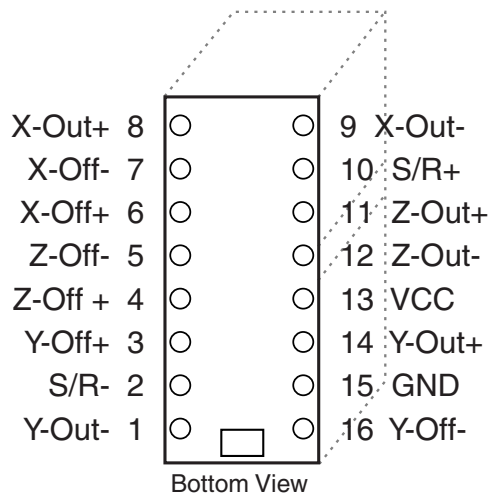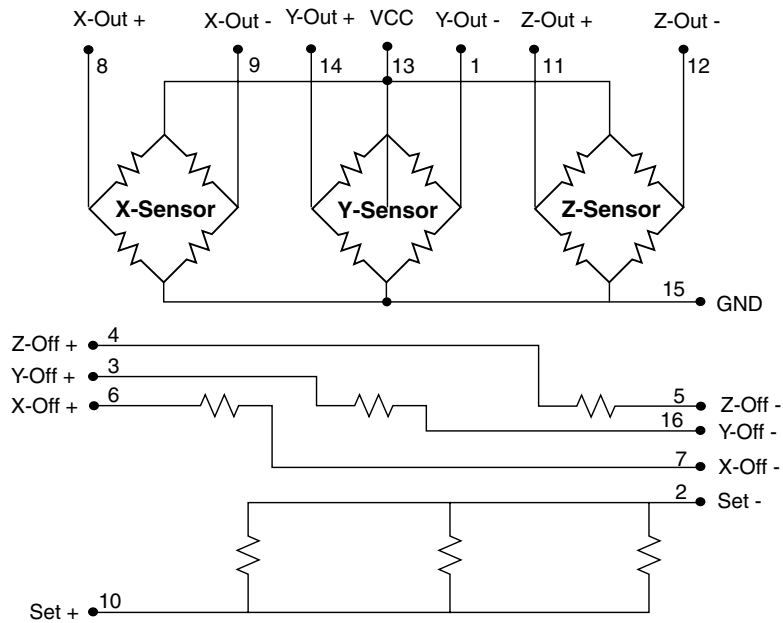


(millimeters)

## KEY PERFORMANCE DATA


Sensor output vs magnetic field  
after being set or reset

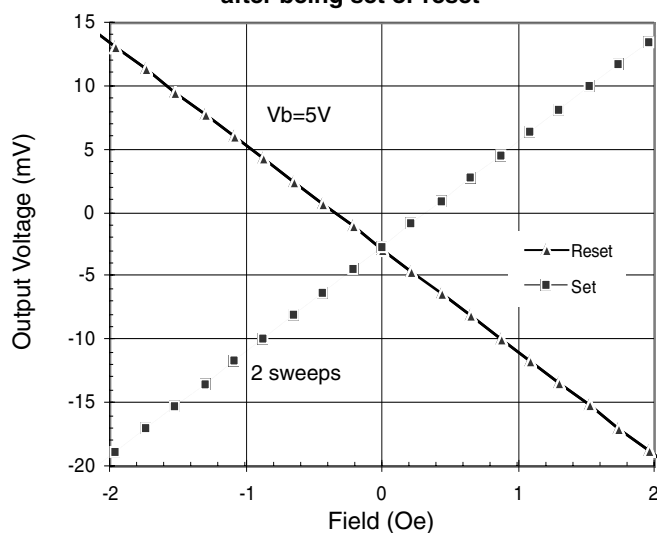


Sensor output vs magnetic field  
Output is repeatable in field range  $\pm 20$  Oe

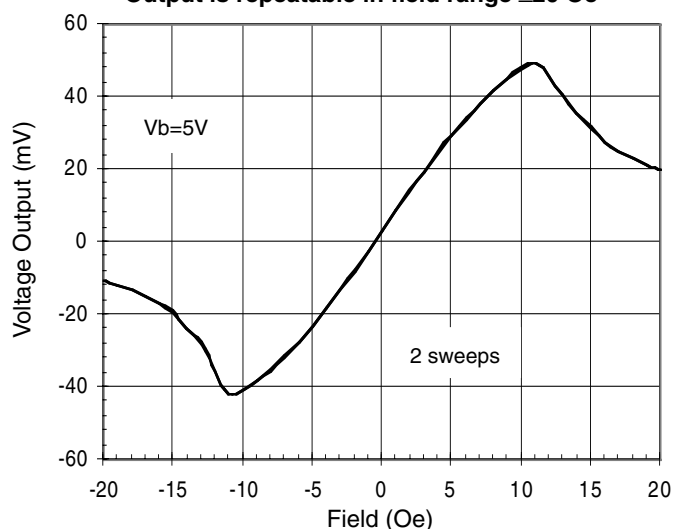


Sensor noise vs frequency

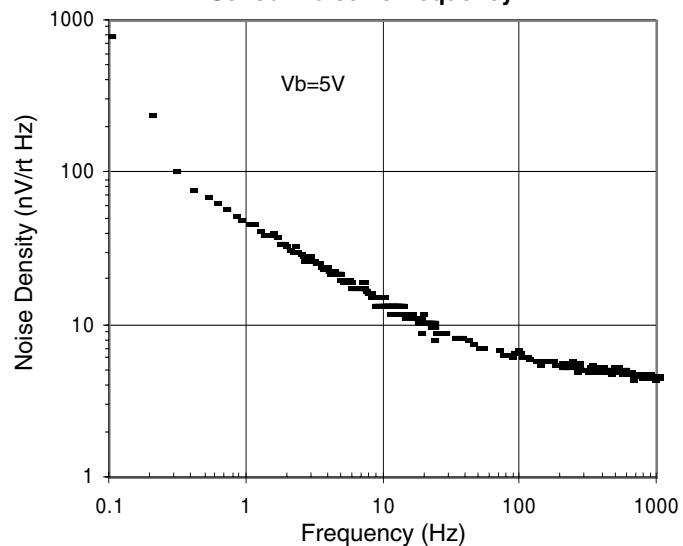


Sensitivity vs temperature  
Constant voltage power supply

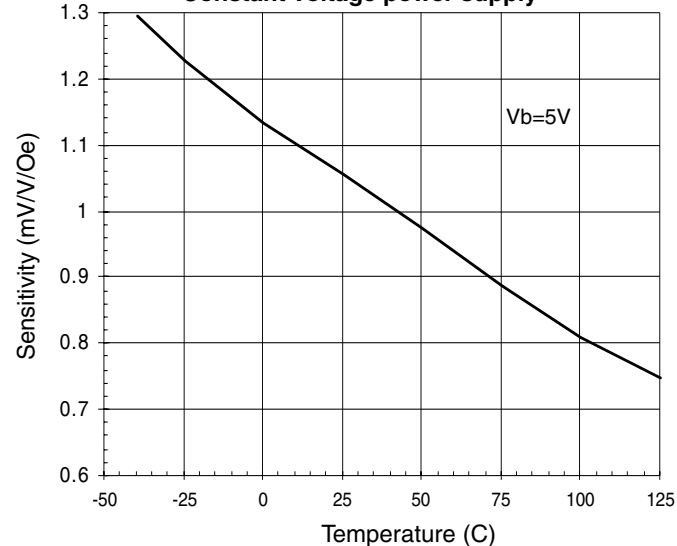

Bridge resistance vs temperature

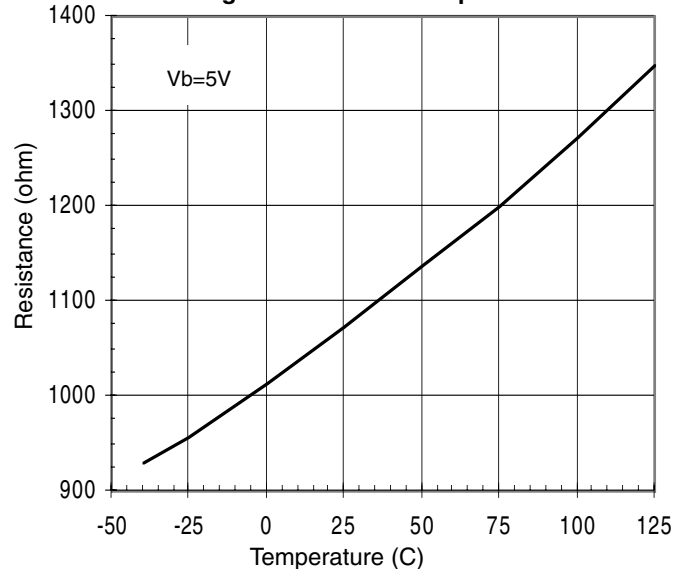

Effects of set/reset pulse variation  
2  $\mu$  sec pulse duration, S/R voltage  $\geq 4$  V is recommended

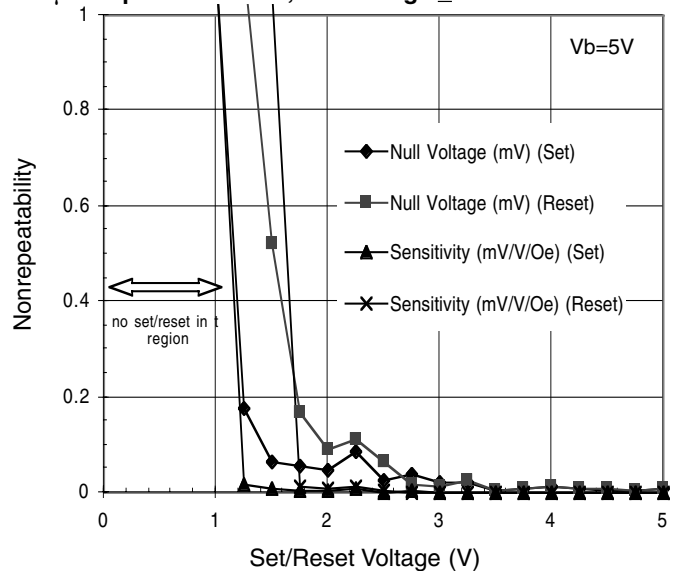

## SPECIFICATIONS

Characteristic	Conditions	Min	Typ	Max	Unit
Bridge Supply	V <sub>bridge</sub> referenced to GND	3	5	12	Volts
Bridge Resistance	Bridge current = 5mA	250	350	450	Ω
Operating Temperature	Ambient	-40		125	° C
Storage Temperature	Ambient, unbiased	-55		125	° C
Field Range	Full scale (FS) — total applied field	-6		+6	gauss
Linearity Error	Best fit straight line (at 25° C) ±1 gauss ±3 gauss ±6 gauss		0.05 0.4 1.6		%FS
Three-Axis Orthogonality	Angle from 90°		±1		degrees
Hysteresis Error	3 sweeps across ±3 gauss @ 25° C		0.08		%FS
Repeatability Error	3 sweeps across ±3 gauss @ 25° C		0.08		%FS
Bridge Offset	Offset = (OUT <sub>+</sub> ) - (OUT <sub>-</sub> ), Field=0 gauss after Set pulse, V <sub>bridge</sub> =5V	-10	±2.5	+10	mV
Sensitivity	At V <sub>bridge</sub> =5V	0.8	1.0	1.2	mV/V/gauss
Noise Density	Noise at 1Hz, V <sub>bridge</sub> =5V		48		nV/√Hz
Resolution	Bandwidth=10Hz, V <sub>bridge</sub> =5V		85		μgauss
Bandwidth	Magnetic signal (lower limit = DC)		5		MHz
OFFSET Strap	Measured from OFFSET+ to OFFSET-	40	50	60	Ω
OFFSET Strap ΩTempco	T <sub>A</sub> =-40 to 125° C		3900		ppm/° C
OFFSET Field	Field applied in sensitive direction	4.0	4.6	6.0	mA/gauss
Set/Reset Strap (1)	Measured from S/R+ to S/R-	2.0	3.0	4.0	Ω
Set/Reset Current (1)	2μS current pulse	1.5	2.0	4.0	Amp
Disturbing Field	Sensitivity starts to degrade. Use S/R pulse to restore sensitivity.	20			gauss
Sensitivity Tempco	T <sub>A</sub> =-40 to 125° C V <sub>bridge</sub> =5V I <sub>bridge</sub> =5mA	-2800	-3000 -600	-3200	ppm/° C
Bridge Offset Tempco	T <sub>A</sub> =-40 to 125° C Set/Reset I <sub>bridge</sub> =5mA no with Set/Reset		±500 ±10		ppm/° C
Resistance Tempco	V <sub>bridge</sub> =5V, -40 to 125° C		2500		ppm/° C
Cross-Axis Effect	Cross field=1gauss (see AN-205) H <sub>applied</sub> =±1 gauss		+0.3		%FS
Max. Exposed Field	No perming effect on zero reading			200	gauss

(1) Three in parallel.

Units: 1 gauss (G) = 1 Oersted (in air), 1G = 79.58 A/m,  
1G = 10E-4 Tesla, 1G = 10E5 gamma

Honeywell reserves the right to make changes to any products or technology herein to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.