



11/2013

---

# Kraus & Naimer

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than hundred years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

## BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL  
FOR QUALITY SWITCHGEAR

---

<b>Contents</b>	Description Page	Dimensions Page
Construction Data	2	-
How to order	3	-
Optional Extras:		
Add-on Face Plates	22	39
Auxiliary Contacts	8	27
Bayonet/Switch Coupling	11	32
Door Clutches	5, 6	27, 28
Electromechanical Interlock	10	31
Ground and Neutral Terminal	11	33
Indicator Lamp Devices	6, 7	26, 29
Interlock between Switches	9	30
Key-lock Devices	15-18	34-37
Motor Drive	14	33
Padlock Devices	19	37, 38
Position Indicator	8	-
Protective Cover	11	-
Push Button Interlock	10	31
Push-pull Interlock	9	30
Ratchet Coupling	13	32
Shaft Extension	4	26
Slip Clutch	13	32
Special Drive Units	12	33
Spring Return over several Positions	13	29
Stop and Go Device	9	29
Tandem Drives	11	30
Terminal Lugs	4	-
Trip Devices	14	32
Trip Indicator	8	-
Uni-directional Interlock	13	-
Switch Type Variations	21	38, 39
Enclosures	23-25	40-42
Blue Line Switchgear: Summary	44	-

## Construction Data


---

The large cam switch line of the A, C, CA, CAD, CG, CH, CHR, D, L and X-series is complemented by a large number of optional extras and enclosures.

This substantial number of optional extras and enclosures is needed in order to meet the requirements of the world market.



One or more optional extras may be used in combination with any one switch provided they are of the same switch size. A few exceptions where this cannot be accomplished are noted on the following tables. In some cases, for technical strength or esthetic reason, it may be desirable that a switch be combined with an optional feature of the next larger switch size. Many options provide for such a possibility.

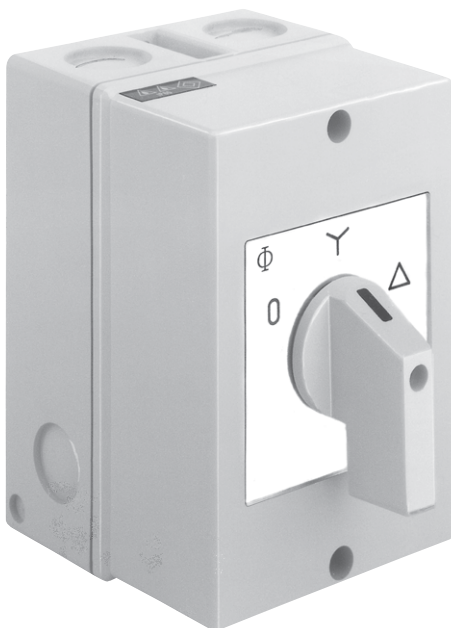

Enclosures are manufactured from plastic or aluminum material. They offer a high degree of protection (up to IP 66/67) thereby permitting switch operation under adverse environmental conditions. The materials used provide considerable strength and the best possible protection against corrosion. A large number of possibilities exist for combining switches, enclosures and appropriate optional extras.

## How to order

Disconnectors and Main Switches with Optional Extras acc. to IEC 60947-3 see Catalog 500

When ordering Blue Line cam switches with optional extras, the following method of coding is required. Details on the enclosures and optional extras are shown in this catalog.

### 1. Switch Type

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

### 2. Switch Function

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

### 3. Type of Mounting

See Catalog 100, 110, 120, 130 or DC-Switch G20/G20S.

### 4. Enclosures

The assigned code numbers for the various enclosures are shown in this catalog on pages 23-25.

**CA20B**

**A202  
V840G/**

**PN**

### 5. Optional Extras

Pages 4-22 list optional extras and their coding. A ● indicates the switch sizes in which the optional extra shown is available.



Possible combinations of switches of the same switch size with an optional extra of the next larger switch size are indicated by a ●. Only in this case indicate the next larger switch size in front of the coding.

There are some optional extras in existence which are available in a variety of programs. Additional ordering data may, therefore, be required. In the above case, a color description is required for the cover and handle disc.

Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting
A11	S1	CA4-1	S00	CG4-1	S00	DHR10	S0	L350	S2
A11C	S2	CAD4-1	S00	CGD4-1	S00	DH10B	S1	L351	S2
A25	S1	CA10	S0	CG6	S00	DHR10B	S1	L400	S3
A25C	S2	CA10R	S0	CG8	S0	DK11	S0	L600	S3
C26	S1	CA10B	S1	CH6	S00	DKR11	S0	L630	S2
C26C	S2	CA11	S0	CH10	S0	DH11	S0	L631	S2
C32	S1	CA11B	S1	CH10B	S1	DHR11	S0	L800	S3
C32C	S2	CA20	S0	CH16	S0	DH11B	S1	L1000	S2
C42	S1	CA20B	S1	CH16B	S1	DHR11B	S1	L1001	S2
C43	S2	CA25	S0	CHR6	S00	DK12	S0	L1200	S3
C80	S2	CA25B	S1	CHR10	S0	DKR12	S0	L1250	S2
C125	S2	CA40	S1	CHR10B	S1	DH12	S0	L1251	S2
C200-4	S2	CA50	S1	CHR16	S0	DHR12	S0	L1600	S3
C315	S3	CA63	S1	CHR16B	S1	DH12B	S1	L2000	S3
C316	S3	CAD11	S0	DK10	S0	DHR12B	S1	X200	S3
CA4	S00	CAD12	S0	DKR10	S0	G20	S0	X400	S3
CA4N	S00	CG4	S00	DH10	S0	G20S	S0	X630	S3

Optional Extras	Code	For Switch Sizes				
		S00	S0	S1	S2	S3

## Terminal Lugs

	<p>For screw with wire clamps</p> <p>Terminal lugs facilitate the connecting of wires in installations where the terminals are not easily accessible.</p> <p>All X switches, L switches and switches type C315/ C316 will be supplied with terminal lugs as standard.</p>	<b>M900</b>		G20 G20S	A11 A25 C26 C32 C42	●	
	 <p>Terminal lugs for quick connect termination</p> <p>Each quick connect terminal may accept either one 6,3 mm quick connect lug or two 2,8 mm quick connect lugs. Switch type CA4 only accepts one quick connect lug 2,8 mm.</p>	<b>M930</b>		<sup>1</sup> CA4 CH6	<sup>1</sup> CH10 CH16 DH10 DK10 G20 G20S	<sup>1</sup> A11 A25 CH10B CH16B DH10B	

## Achsverlängerung

 <p><i>Dimensions p.26</i></p>	<p><b>With asymmetric profile</b></p> <p>Shaft length not adjustable</p> <p>Shaft with unlimited adjustable length with set screw with shear ring</p> <p>Adjustable shaft can be set to the desired length in a pre-mounted switch with VE mounting plate.</p>	<b>L100 L100B</b>		●	●		
		<b>M004D</b>		●	●	●	●
 <p><i>Dimensions p.26</i></p>	<p><b>With square profile</b></p> <p>Shaft length not adjustable <input type="checkbox"/> 6 mm <input type="checkbox"/> 5 mm</p> <p>Shaft with unlimited adjustable length with set screw with clamping bushing</p>	<b>L100A L105A</b>		●	●		
		<b>M004E</b>			●	●	●
Ordering data:		Free shaft length or dimension from mounting surface to cover.					

<sup>1</sup>The coding of the switch type may change as shown in Catalog 100, 120 and 130, page 4.

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3







## Standard Door Clutch

 <p>With shaft extension, shaft with unlimited adjustable length shaft fixation with set screw Front protection IP 40 Front protection IP 66/67</p> <p><i>Dimensions p. 28</i></p>	<p><b>M280E</b> <b>M280E/.EF</b></p>	●	●	●	●
		●	●	●	●
 <p><b>Door clutches M700/M701<sup>1</sup></b></p> <p>Handle lockable with padlocks Protection IP 66 The face Plate is available in black, yellow and alu. The handle may be supplied in black and red.</p> <p>Standard handle and standard face plate Protection IP 65</p> <p>The M700/M701 is a padlock door clutch and a mechanical interlocking safety device. Using the device the electrical panel may be opened only when the switch is in the OFF position and no padlock is fitted. Note: Only in the ON position can knowledgeable personnel using a simple tool to defeat the interlock. The M700's flexibility allows for successful installation with as much as + or - 5 mm of misalignment between the shaft and door.</p>	<p><b>M700/.</b></p>	●	●	●	●
		●	●	●	
 <p><b>Unlock insert for the M700 ff.</b></p> <p>To open the door in ON-position. (After the locking has been made inactive, it is necessary to take effective precautions against an opening of the door by unauthorized persons.)</p>	<p><b>S1D M700 29</b></p>				
 <p><b>Door clutches M800/M810.<sup>1</sup></b></p> <p>Door clutch utilizes a simple and robust design and features a compact size. It has an interlock in the ON-position while a padlock can be fitted in the OFF-position. The door clutch may be opened only if the switch is in the OFF-position. In special cases, however, authorized people have a requirement to open the door, even if the switch is in the ON-position. Further characteristics are the single hole mounting with IP 66/67 protection degree, as well as the Accepted Misalignment up to ± 3 mm horizontally and ± 5 mm vertically. Maximum 3 padlocks with a minimum shackle diameter from 5 up to 8 mm are possible.</p> <p><i>Dimensions p. 28</i></p>	<p><b>M800/.</b></p>	●	●		
		●			
<p><b>Ordering data:</b></p> <p>Dimension from face of the switch to the cover or dimension from mounting surface to cover as well as the interlock program and the color selection.</p>	<p><b>M810/.</b></p>				


<sup>1</sup>Additional shaft extension must be specified.

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

### Simplified Door Clutch



 <p><i>Dimensions p.27</i></p>	<b>Single hole mounting 22 mm, protection IP 66.</b>  Additional profile extension parts and shaft extension must be specified.  For shaft extension For profile extension parts	<b>M295/.A</b> <b>M295/.B</b>	●	●		
	<b>With padlock device and single hole mounting 22 mm, protection IP 66.</b> Additional shaft extension must be specified.  For 2 padlocks		●	●		
	For 2 padlocks	 mm	6-8			
	For 2 padlocks	<b>V840E</b>	●	●		
	For 3 padlocks	 mm	6-7			
	For 4 padlocks	<b>V840D</b>	●			
		 mm	7-8,5			
		<b>V840G</b>	●	●		
		 mm	4-8			
		<b>V840F</b>	●	●		
	The cover disc is available in black, yellow and electro-gray. The handle may be supplied in red, black and electro-gray.  For 4 padlocks  Operation of the locking bar from the front. Available in black, red and electro-gray.	 mm	3-7	4-8		
		<b>V845</b>	●	●		
	<b>Centering aid for simplified door clutches with single hole mounting and shaft extension</b>  Misalignment between the shaft and mounting are compensated in all 4 directions.	<b>M600</b>		●		
Ordering data:		Free shaft length or dimension from mounting surface to cover or distance from face of the switch to the cover and color selection.				

### Indicator Lamp Device (without Lamp)



 <p><i>Dimensions p.29</i></p>	<b>With square face plate</b>  With white lamp socket <sup>1</sup> Without lamp socket	<b>Q200/A1</b> <b>Q200/A2</b>	●	●	●	●
	The lamp socket for switch size S0 had been designed for glowing lamps with socket E10. For switches size S1, S2 and S3 the sockets are provided for lamps with thread E14.		●	●	●	●
	<b>With rectangular face plate</b>  With white lamp socket <sup>1</sup> Without lamp socket	<b>Q200/B1</b> <b>Q200/B2</b>	●	●		
	<sup>1</sup> Additional colors on request.		●	●		

Optional Extras	Code	For Switch Sizes			
		S00	S0	S1	S2

### Control and Indicator Device (without Lamp)


 <p><i>Dimensions p. 26</i></p>	<p>For 1 lamp with socket BA 9s Max. power 2,8 W</p> <p>The control and indicator device includes a single hole mounting 30 mm with locking nut and can be supplied with the following front end assemblies: Front ring (alternatively with add-on face plate), Face plate 48 x 48 mm (alternatively with add-on face plate) or face plate 64 x 64 mm.</p> <p>The operation may be as follows:</p> <p>Turn to operate</p> <p>Push-to-turn operation (interlock as control and alarm switch)</p> <p>This type of version is available with 1 or 2 auxiliary contacts. Select between a contact system with a rigid contact bridge for excellent AC-15 making and breaking capabilities which is also available with gold contacts for use in aggressive environments or a H-bridge design with "cross-wire" contact system with gold-plated contacts for low voltages and currents.</p>	<p><b>Q110</b></p> <p><b>Q110/F</b></p>	<p>●</p> <p>●</p>			
	 <p>Removal aid for control and indicator device</p> <p>For 6 lamps with socket T6,8 Length of lamp 42-44 mm Max. power per lamp 2,5 W</p> <p>According to the operating voltage the lamps have to be paralleled or connected in series. As front end assembly the alu-face plate 51,8 x 51,8 mm is supplied.</p>	<p><b>S0E Q110 09</b></p> <p><b>Q100/A</b></p>				●
Ordering data:	For size S0 the front end assembly, the quantity and operation of the auxiliary contacts and type of the contact system.					

### Control and Indicator Device with Light Conductor

 <p><i>Dimensions p. 26</i></p> 	<p>The luminous source is a LED module with yellow light-emitting diode mounted at the end of the switch. The transmission of light occurs via a light conductor.</p> <p>Operating voltage 24 V AC/DC 60 V AC, 60 V DC 110 V AC, 110 V DC 230 V AC with test terminal 24 V DC 60 V DC 110 V DC</p> <p><u>Types of version</u> Without interlock (handle “turn to operate”) With interlock (handle “push to turn”) The control and indicator device is available for single hole mounting and mosaic.</p>	<p><b>Q100B</b></p> <p>●</p>			
Ordering data:	Operating voltage and type of version.				

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

## Trip Indicator

 <p>With square face plate</p> <p>With rectangular face plate</p> <p>The trip indicator used on switches with spring return positions. It includes a colored indicator to show the last SR position that handle has been turned. Two possibilities for flag indicator exist: a) left red - right green b) left green - right red</p>	<b>M120/A</b>	●	●		
	<b>M120/B</b>	●	●		
Ordering data:	The color to appear after left or right operation.				

## Auxiliary Contacts

Dimensions p.27

These auxiliary contacts are controlled with a cam which can be programmed. The max. number of the auxiliary contacts for switches of size S1 and S2 is 4 pcs. and for switches of size S3 is 6 pcs.

Select between a contact system with a rigid bridge for excellent AC-15 making and breaking capabilities or a H-bridge design with “cross-wire” contacts (sizes S1 and S2) for low voltages and currents. The contact systems with gold contacts or gold-plated contacts allow for use in aggressive environments also.

In cases where more than 4 resp. 6 auxiliary contacts are required, an auxiliary switch should be used alternatively.

M510B

A11 C80  
A25 C125  
CA40 L350-  
CA50 L1251  
CA63  
C26  
C32  
C42



Rated Insulation Voltage $U_i$	V	440	690	
Rated Thermal Current $I_n/I_{th}$	A	10	16	
AC-21 Switching of resistive loads, including moderate overloads	A	10	16	
AC-15 Switching of control devices, contactors, valves etc.	110 V-240 V	A	2,5	6
	380 V-440 V	A	1,5	3
	500 V	A	-	1,5
Short Circuit Protection				
Max. fuse size gG-characteristic	A	10	10	
Max. Permissible Wire Gage - copper wires only				
single-core or stranded wire	mm <sup>2</sup>	1,5	2,5	
Flexible wire	mm <sup>2</sup>	1	2,5	
Flexible wire with sleeving in accordance with DIN 46228	mm <sup>2</sup>	1,5	2,5	

Ordering data:


Quantity and operation of the auxiliary contacts and type of the contact system.

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3


## Push-pull Interlock

 <p><i>Dimensions p. 30</i></p> <table><tr><td>AC-15</td><td>220 V-240 V</td><td>2,5 A</td></tr><tr><td></td><td>380 V-440 V</td><td>1,5 A</td></tr></table>	AC-15	220 V-240 V	2,5 A		380 V-440 V	1,5 A	<p>To pull lateral spring return</p> <p>To pull lateral latching</p> <p>To push lateral spring return</p> <p>To push lateral latching</p> <p>The push-pull device is used to interlock the switch so that the handle can be rotated only when pushed or pulled. The push-pull device can be programmed to allow the interlock to operate only between pre-determined switch positions. Auxiliary contacts can be operated by means of the axial movement of the handle. For switches size S0 the max. number of auxiliary contacts is 2 pieces for all other sizes 8 pieces. In addition switches size S0 can also be combined with a trip indicator.</p>	<p><b>V110A</b></p> <p><b>V115A</b></p> <p><b>V130A</b></p> <p><b>V135A</b></p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p>			
AC-15	220 V-240 V	2,5 A										
	380 V-440 V	1,5 A										
 <p><i>Dimensions p. 30</i></p> <table><tr><td>AC-15</td><td>600 V</td><td>6 A</td></tr><tr><td></td><td>500 V</td><td>3 A</td></tr></table>	AC-15	600 V	6 A		500 V	3 A	<p>To pull lateral spring return</p> <p>To pull lateral latching</p> <p>To pull and to push lateral spring return</p> <p>To push lateral spring return</p> <p>To push lateral latching</p>	<p><b>V110</b></p> <p><b>V115</b></p> <p><b>V120</b></p> <p><b>V130</b></p> <p><b>V135</b></p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p> <p>●</p>	<p>●</p> <p>●</p> <p>●</p> <p>●</p> <p>●</p>	
AC-15	600 V	6 A										
	500 V	3 A										
Ordering data:		Description of the interlocking program, number and operation of the auxiliary contacts.										

## Stop and Go Device


 <p><i>Dimensions p. 29</i></p>	<p>The stop and go device prevents a fast switching thru the center OFF position. This is only possible with a 60° switching angle.</p> <p>The stop and go device only becomes activated in the center switch position, in either in both or one direction.</p>	<b>V160</b>	●			
Ordering data:	Operation of the stop and go device.					

## Interlock between Switches

 <p><i>Dimensions p. 30</i></p>	<p>For 2 switch columns</p> <p>An interlock between 2 or 3 switch columns permits the operation of one switch only when the other switch or switches are located in a pre-determined switching position. For heavy duty service reinforced devices are available.</p>	<b>V600/B</b>		●	●	●
	<p>For 3 switch columns</p>	<b>V600/C</b>		●	●	●
Ordering data:	Description of the interlocking program.					

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

## Push Button Interlock

 <p>With square face plate</p> <p>Switching only possible if push button is depressed.</p> <p>Up to 4 auxiliary contacts can be operated by depressing the push button.</p>	<b>V400/A1</b>	●	● <sup>1</sup>	●	●
	<b>V400/B1</b>	●	● <sup>1</sup>		

Dimensions p. 31

Ordering data:

Number and operation of the auxiliary contacts.

## Electromechanical Interlock<sup>2</sup>

 <p>For switches size S1</p> <p>The electromechanical interlock locks the switch in any switching position. The interlock device is operated by energizing or de-energizing the electromechanical system. Adding auxiliary contacts to the switch permits the device to be operated only in pre-determined positions.</p> <p>The optional extra S1 V140/2 can be equipped with a positive breaking auxiliary contact according to IEC 60947-5-1</p> <p>24V - 600V 50Hz/60Hz</p>	<b>V140</b>		●		
	<b>V140</b>		●	●	●
	<b>S01 V140/</b>				

Dimensions p. 31

Ordering data:

Advise if the interlock is activated either by energizing or de-energizing of the electrical system. Coil voltage also required.


Magnet  
available Voltage:  
24V - 240V 50Hz/60Hz /DC

<sup>1</sup>With auxiliary contacts available only up to switch type CA25B.


<sup>2</sup>Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.


Optional Extras	Code	For Switch Sizes				
		S00	S0	S1	S2	S3

### Protective Cover


 <p>The protective cover prevents accidental contact with current-carrying terminals.</p>	<b>M160</b>					
				C26 C32 C42 A25	C80 C125	C315 C316 L400





### Ground and Neutral Terminal

 <p><i>Dimensions p. 33</i></p>	<b>H040/E</b>  <b>H040/N</b>  <b>H040/NE</b>					
			●			
			●			
			●			
Ground terminal						
Neutral terminal						
Ground and neutral terminal						

 <p><i>Dimensions p. 30</i></p>	<b>M300/B</b>    <b>M300/C</b> <b>M300/D</b>					
For 2 switch columns				●	●	●
Two or three switch columns can be operated simultaneously. Special programs are available to reinforce the device for heavyduty applications.						
For 3 switch columns For 4 switch columns				●	●	●
						●


### Bayonet/Switch Coupling

 <p><i>Dimensions p. 32</i></p>	<b>M270</b>  <b>M275</b>					
The device is used to couple switches into one column						
Switches of the same size				●	●	●
Switches of different sizes		●	●	●	●	●


Optional Extras		Code	For Switch Sizes			
			S0	S1	S2	S3
<b>Special Drives</b>						
 <p><i>Dimensions p. 33</i></p>	<p><b>Heavy duty drive unit</b></p> <p>The device is designed to allow customer to couple his own operating device to the switch.</p>	<b>G800/A</b>		●		
 <p><i>Dimensions p. 33</i></p>	<p><b>Heavy duty drive unit with actuator and roller</b></p>	<b>G800/B</b>		●		
 <p><i>Dimensions p. 33</i></p>	<p><b>Double action lever</b></p>	<b>G800/C</b>		●		
 <p><i>Dimensions p. 33</i></p>	<p><b>Rope operation</b></p> <p>Available for spring return, maintained or stepping operation.</p>	<b>G900/B</b>		●		

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3


### Spring Return over several Positions

 <p><i>Dimensions p. 29</i></p>	Spring return from both sides	<b>M470/A</b>	● ●	●	●	
	Spring return from one side	<b>M470</b>	● ●	●		
<p>Spring return for angular displacement up to 30° can be accomplished by using the latching mechanism only. If a large number of contacts must be opened simultaneously or a total angular displacement is larger than 30° over which the spring return is operational, the switch must use one of the spring return devices.</p> <p>Spring return from both sides can be designed to permit maintained position on each side of center.</p>						
<p>Ordering data:</p> <p>For M470, specify spring return from either left or right side and details of maintained positions, if required.</p>						

### Uni-directional Interlock


	<p>The uni-directional interlock prevents the switch from being operated counterclockwise. The interlock may be in either all positions or in pre-determined positions only.</p>	<b>M400</b>	●	●	●	●
<p>Ordering data:</p> <p>Specify which positions should be interlocked.</p>						

### Slip Clutch and Ratchet Coupling


 <p><i>Dimensions p. 32</i></p>	Slip clutch	<b>M200</b>	●	●		
	<p>Using the slip clutch, two cam shafts can be coupled in such a way so that the secondary cam shaft will operate only after the primary cam shaft has been moved over a pre-determined angle. This slip clutch allows e. g. the de-energized changing back of switches for pole-changeable motors. Not available for D-switches.</p>					
Ratchet coupling		<b>M230</b>				
<p>A ratchet coupling attaches to the rear of the switch. Additional stages are then attached behind the coupling device which serves to operate that portion of the switch only when the handle is turned counterclockwise. When the handle is turned clockwise, the rear switch portion remains in the same position.</p>				CA40 CA50 CA63 C26 C32		

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3


### Electromechanical Trip Device (Undervoltage Release)<sup>1</sup>

 <p><i>Dimensions p. 32</i></p>	Operating voltage and frequency:				
	AC/50 Hz	<b>V350/A</b>	●		
	AC/60 Hz	<b>V350/B</b>	●		
	AC/50/60 Hz	<b>V350/C</b>	●		
	DC	<b>V350/D</b>	●		
<p>The device includes a magnetic system which releases the switch to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage. The device is trip-free, in that the switch can be operated only when the primary voltage is available. When using DC voltage, an economy resistor must be provided.</p> <p>Switches with integrated undervoltage release are described on page 21.</p>					
Ordering data:	Operating voltage and frequency for the magnetic system.				

### Electromechanical Trip Device (Shunt-trip)<sup>1</sup>




























 <p><i>Dimensions p. 32</i></p>	<p>The device permits the switch to be turned to the trip position by remote control. The coil is designed for short-time duty requiring an auxiliary contact in the switch which de-energizes the coil in the trip position.</p> <p>Controlling of the magnetic system: 24 V-440 V/50 Hz, 60 Hz or DC</p>	<b>V360/A</b>	●		
	Ordering data:	Operating voltage for the magnetic system.			

### Motor Drive<sup>1</sup>

 <p><i>Dimensions p. 33</i></p>	<p>The motor drive consists of an AC motor with condenser, gear train and Geneva gear. This device allows switches to be operated from a remote location. Motor voltages available are 230 V, 50 Hz and 117 V, 60 Hz. A technical data sheet pertaining to the possible control systems is available upon request.</p>	<b>R300</b>	●	●	●

<sup>1</sup>Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.




Optional Extras	Code	For Switch Sizes			
		S00	S0	S1	S2

 <p>For 1 stage switches in PN enclosure</p> <p>For 2 stage switches in PN enclosure</p> <p>For 1 stage switches with plaster depth trim (With half-cylinder see page 17)</p> <p>For base mounting with type of mounting VE21</p> <p>For single hole mounting combined with 16/22 mm, protection IP 66</p> <p>Micro-Kaba lock</p> <p>With front ring (mounting FS1) Face plate 30 x 30 mm (mounting FS2) Face plate 30 x 39 mm (mounting FS4)</p> <p>Locking program in which the key can be removed:</p> <p>A  B  E  F  G  R </p> <p>Lock 601</p> <p>With front ring (mounting FS1) Face plate 30 x 30 mm (mounting FS2) Face plate 30 x 39 mm (mounting FS4)</p> <p>Locking program in which the key can be removed:</p> <p>C  G  M  H  P  D  N  J  Q </p> <p>For single hole mounting combined with 16/22 mm</p> <p>With front ring (mounting FT1) Face plate 48 x 48 mm (mounting FT2) Face plate 64 x 64 mm (mounting FH3) Face plate 48 x 59 mm (mounting FT6) Face plate 64 x 78,5 mm (mounting FH4)</p> <p>Locking program in which the key can be removed:</p> <p>C  G  M  H  P  K  D  N  J  Q  S </p>	<p><b>V750/</b></p> <p><b>V750D/</b></p> <p><b>V750D/1</b></p> <p><b>V750D/2<sup>1</sup></b></p> <p><b>V750D/3</b></p>	<p>CA11 CA20</p> <p>CA10- CA20</p> <p>CA10</p> <p>CA4 CG4</p> <p>•</p> <p>• • •</p> <p>• • •</p> <p>• • • • •</p>			
Ordering data:	Locking program of the key.				


<sup>1</sup>At high safety requirements use V750D/1.

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

### Key-lock Device with Kaba Lock


 <div>Dimensions p. 35</div>	<p>For single hole mounting 25 mm</p> <p>With front ring (mounting EL)</p>	<p>V750D/</p> <p>●</p>				
 <div>Dimensions p. 35</div>	<p>For four hole panel mounting</p> <p>Face plate 48 x 48 mm (mounting E)</p> <p>Face plate 64 x 64 mm (mounting EG)</p> <p>Face plate 48 x 60 mm (mounting E)</p> <p>Face plate 64 x 78,8 mm (mounting EG)</p>	<p>V750D/A</p> <p>●</p> <p>V750D/A</p> <p>●</p> <p>V750D/B</p> <p>●</p> <p>V750D/B</p> <p>●</p>				
 <div>Dimensions p. 35</div>	<p>For snap-on base mounting on track acc. to EN 50022</p> <p>With face plate for 45 mm knock-out (mounting VE2)</p>	<p>V750D/</p> <p>●</p>				
	<p>Locking program in which the key can be removed:</p> <p>1A 1B 1C 1D 1E 1F 1G</p> <p>2G 2H 2J 2K 2L</p>					
Ordering data:	Locking program of the key.					

### Key-lock Device with Profile Cylinder




 <p><i>Dimensions p. 35</i></p>	<p>The key-lock device V750E with profile cylinder is furnished with a single hole mounting 22 mm for switches in size S0. The key can be removed in one switch position or for switches with 60° switching angle in up to six switch positions. The device with profile cylinder can be supplied with standard lock cylinders manufactured by CES, BKS or IKON.</p>	<p><b>V750E</b></p>	<p>●</p>				
--	--	---------------------	----------	--	--	--	--

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

### Key-lock Device with Kaba Lock

 <p><i>Dimensions p. 36</i></p>	<p><b>For single hole mounting 40 mm</b></p> <p>Face plate 64 x 64 mm (mounting EL2) With front ring (mounting EL1)</p> <p>Key can only be removed in the 12 o'clock position. Central locking systems are available.</p>	<b>V750/A1</b>	●	●		

### Key-lock Device with Half-cylinder Lock

 <p><i>Dimensions p. 36</i></p>	<p><b>For switches with plaster depth trim</b></p> <p>For 1 stage switches in standard flush mounting box For multiple staged switches in special flush mounting box Protection IP 42</p> <p>The switch must have an arrested position in 12 o'clock. The key is only removable in the 12 o'clock position. The max. angular displacement is 2 x 135°.</p>	<b>V755.UE1</b>	BA20			
	<p><b>Dust cap for key-lock device</b> Protection IP 43</p>	<b>S0D V755 12</b>				
 <p><i>Dimensions p. 36</i></p>	<p><b>For panel mounting</b> Protection IP 43</p> <p>The key is removable in the 12 o'clock position. The max. angular displacement is 2 x 120°. Protection IP 42</p> <p>Additional programs with key removable in 2 positions are available on request.</p>	<b>V755.E</b>	●			

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Safety-key-lock Device with separate Drive

	With small cylinder lock	V760/A.E	●●●																																
	Square face plate																																		
	Rectangular face plate	V760/B.E	●●●																																
<i>Dimensions p. 36</i>																																			
	With commercial half-cylinder lock	V760/A	●●●●																																
	Square face plate																																		
	Rectangular face plate	V760/B	●●																																
<i>Dimensions p. 36</i>																																			
	With half-cylinder lock	V765	●																																
	Square face plate																																		
<i>Dimensions p. 36</i>																																			
	With dust cap Protection IP 43																																		
<i>Dimensions p. 36</i>																																			
Various key positions and locking programs are available. Key positions: Key can be removed in locked and unlocked positions. Key can be removed only in locked positions. Locking programs:																																			
<table><tr><th rowspan="2">Locking Program No.</th><th rowspan="2">Switching Angle</th><th colspan="2">Switch Positions</th><th rowspan="2">Size</th></tr><tr><th>To be locked</th><th>Not to be locked</th></tr><tr><td>1</td><td>30°-90°</td><td>one</td><td>the balance</td><td>S0-S3</td></tr><tr><td rowspan="2">2</td><td>20°</td><td rowspan="2">all</td><td rowspan="2">none</td><td>S1, S3</td></tr><tr><td>30°-90°</td><td>S0-S3</td></tr><tr><td>3</td><td>30°-90°</td><td>the balance</td><td>one</td><td>S1-S3</td></tr><tr><td>4<sup>1</sup></td><td>30°-90°</td><td>one<sup>1</sup></td><td>the balance<sup>1</sup></td><td>S0-S3</td></tr></table>							Locking Program No.	Switching Angle	Switch Positions		Size	To be locked	Not to be locked	1	30°-90°	one	the balance	S0-S3	2	20°	all	none	S1, S3	30°-90°	S0-S3	3	30°-90°	the balance	one	S1-S3	4 <sup>1</sup>	30°-90°	one <sup>1</sup>	the balance <sup>1</sup>	S0-S3
Locking Program No.	Switching Angle	Switch Positions		Size																															
		To be locked	Not to be locked																																
1	30°-90°	one	the balance	S0-S3																															
2	20°	all	none	S1, S3																															
	30°-90°			S0-S3																															
3	30°-90°	the balance	one	S1-S3																															
4 <sup>1</sup>	30°-90°	one <sup>1</sup>	the balance <sup>1</sup>	S0-S3																															
<sup>1</sup> Locking program 4 permits the locking of the device in any switch position. However, the actual locking becomes effective in a pre-determined switch position only.																																			
Ordering data:		Advise locking program and positions in which the key can be removed.																																	

Optional Extras	Code	For Switch Sizes				
		S00	S0	S1	S2	S3

## Padlock Device



Dimensions p. 37

For 1 padlock  
with lock bow diameter for 4-5,5 mm.  
The handle may be supplied in black and red.



Dimensions p. 37

The padlock is an integral part of the switch handle itself and can hold 2 padlocks  
The lock bar is accessible from the bottom. Handle can be sealed in the locked and unlocked positions. The handle may be supplied in black, red and electro-gray.



Dimensions p. 37

For mounting VE2 and VE21 with lock bar accessible from the front. Available in red and electro-gray.



Dimensions p. 37







For 4 padlocks  
The lock bar is accessible from the front and may be supplied in black, red and electro-gray.

Spring loaded push rod

	For Switch Sizes				
	S00	S0	S1	S2	S3
<b>V840K</b> mm 3,5-5,5	●				
<b>V840A/A</b> mm 4-6		●	●		
<b>V840A/C</b> mm 3-4,5		●			
<b>V840B</b> mm 4-6		●			
<b>V845</b> mm 3-7 4-8 4-8,5 4-9		●	●	●	●
<b>V846</b> mm 4-8			●		



Ordering data:

Color variation.



Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
<b>Padlock Device</b>							
 <i>Dimensions p. 37</i>	<b>Padlock device with integrated F- or B-handle</b> The cover disc is available in black, yellow and electro-gray. The handle may be supplied in black, red and electro-gray.  <b>For 2 padlocks</b> With F-handle	mm <b>V840D</b>		●			
 <i>Dimensions p. 37</i>	<b>For 3 padlocks</b>  With F-handle  With B-handle	mm <b>V840G</b>		●	●		
		mm <b>V840D</b>				●	
		mm <b>V840G/B</b>		●	●		
 <i>Dimensions p. 37</i>	<b>For 4 padlocks</b>  With F-handle  With B-handle	mm <b>V840F/F</b>		●	●		
		mm <b>V840F/B</b>		●	●		
 <i>Dimensions p. 38</i>	<b>For 2 padlocks</b> <b>For 3 padlocks</b> <b>For 6 padlocks</b>  Upon request, the device can be programmed to lock in several switch positions.	mm <b>V850</b>		●	●	●	●
 <i>Dimensions p. 38</i>	<b>Padlock device for C switches with base mounting for locking when control cabinet is opened.</b>  <b>Padlock device with simplified door clutch and single hole mounting see page 6.</b>	mm <b>V841</b>		●	●	●	
 <i>Dimensions p. 38</i>		mm <b>V842</b>		●	●	●	
Ordering data:		Color variation.					

Switch Type Variations	Suffix Code	For Switch Sizes			
		S0	S1	S2	S3

## PFR (Power Failure Release)<sup>1</sup>







 <p><i>Dimensions p. 38</i></p>  <p><i>Dimensions p. 38</i></p>	<b>Size S0</b> <p>The magnetic system includes a low hum DC coil with incapsulated diode rectifier (blocking voltage 1000 V) = it, therefore, works independent of frequency. PFR switches are available with 24 V-600 V coils.          Available switching detents: 1 x 60° (60° to the right of center OFF), 2 x 60° (60° to the right and left of center OFF), 1 x 60° + 30° (60° plus an additional 30° to the right of OFF).</p>	<b>X</b>	CA.. CG8 CH..			
	<b>Alternatively with trip-free release</b> (Switching angle 1 x 60°) <p>The PFR switch series is designed to provide protection for both machines and machine operators by preventing the equipment (which has been operating) from restarting automatically after a power failure.          The device includes a magnetic system which releases the switch (by means of a linear spring return mechanism) to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage.</p>		CA.. CG8			
	<b>Size S1</b> <p>Operating voltage for the magnetic system:          24 V-500 V/50 Hz          24 V-600 V/60 Hz          (Switching angle 1 x 60°)</p>	<b>X</b>		A11 A25 CA40 CA50 CA63 C26 C32 C42		
Ordering data:	Operating voltage for size S0 as well operating voltage and frequency for size S1 for the magnetic system.					

## Lockout-relay<sup>1</sup>

 <p><i>Dimensions p. 39</i></p>  <p><i>Dimensions p. 39</i></p>	<p>With manual release</p> <p>The lockout-relay is typically used to remotely switch electrical circuits from one power source to another.</p> <p>The device contains a totally incapsulated coil and linear spring return mechanism which is compressed by manually turning the handle to the ON position (60° to the right of OFF). Once in the ON position, the handle is mechanically locked in place and cannot be manually turned back to OFF. When the coil is energized, however, the unit will automatically spring return to the OFF position.</p> <p>A second version is available with push button manual release for test purposes.</p> <p>Controlling of the magnetic system: 24 V-500 V/50 Hz 24 V-600 V/60 Hz 24 V-125 V DC (magnetic system for voltages above 125 V DC on request)</p> <p>Without manual release</p>	<p><b>M</b></p> <p><b>L</b></p>	<p>CA10 CG8 CH..</p>	<p>A11 A25 CA40 CA50 CA63 C26 C32 C42</p>		
Ordering data:	Operating voltage and frequency for the magnetic system.					




<sup>1</sup>Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.

<sup>2</sup>In preparation.


Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
<b>Rectangular Add-on Face plates</b>							
<p>Add-on face plates for switches with single hole mounting and four hole panel mounting</p> <p>The face plates can be engraved or embossed from the front or alternatively from the back. Face plates in different height are also available. The face plate frame is black, the face plate brushed aluminum. For switch sizes S0, S1, S2 and S3 yellow face plates are also available.</p> <p>Add-on face plates with black face plate frame, face plates brushed aluminum</p> <p>Switches with single hole mounting 22 mm and front ring</p> <p>For front inscription For inscription on the back</p> <p>For front inscription For inscription on the back</p> <p>Switches with single hole mounting or four hole panel mounting 22 mm and square face plate</p> <p>For front inscription For inscription on the back</p> <p>For front inscription For inscription on the back</p> <p>Face plates brushed aluminum</p> <p>For front inscription For inscription on the back</p> <p>For front inscription For inscription on the back</p>							
  <p><i>Dimensions p. 39</i></p>   <p><i>Dimensions p. 39</i></p>  		<p>F991/A0B/C-PRD F991/A0B-PRD</p> <p>F991/A0B/C-PRB F991/A0B-PRB</p> <p>F991/A0B/C-PRC F991/A0B-PRC</p> <p>F991/A0B/C-PRA F991/A0B-PRA</p> <p>F991/A00/C-P2B F991/A00-P2B</p> <p>F991/A00/C-P2A F991/A00-P2A</p>	<p>● ●</p> <p>● ●</p> <p>● ●</p> <p>● ●</p> <p>● ● ●</p> <p>● ● ● ● ●</p> <p>● ● ●</p> <p>● ● ● ● ●</p>				
Ordering data:		Color variation, if differing from the described version.					

Enclosures	Code	For Switch Sizes			
		S00	S0	S1	S2

## Plastic Enclosures

<p>Enclosure series protection IP 66/67, made of strong durable plastic, increased wiring space and cover coupling</p> <p>KS and KL series With high UV-resistance</p> <p>CS and CL series For applications in an aggressive environment, such as oil, chemical substances and grease</p> <p>Each enclosure has 2 knock-outs on top and bottom for metric thread according to EN 50262. Standard equipment includes both a ground and neutral terminal. Size S0 enclosures are also available with lateral conduit knock-out and a cover interlock which allows for opening without dismantling the handle. They can also be supplied with a cover locked in 1 position. These enclosures are also available for conduit entries for PG-thread.</p>															
	<p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA4</td><td>3</td></tr><tr><td>CG4</td><td>2</td></tr><tr><td>CG6</td><td>2</td></tr></table>	Switch type	Max. no. of stages	CA4	3	CG4	2	CG6	2	KS3/CS3	M16				
Switch type	Max. no. of stages														
CA4	3														
CG4	2														
CG6	2														
Without cover interlock	KS10/CS10 KS50/CS50	M25 M20													
With cover interlock (the enclosure can only be opened at 9 o'clock position)	KS11/CS11 KS51/CS51	M25 M20													
	<p>With cover interlock (the enclosure can only be opened at 12 o'clock position)</p> <p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA10</td><td>6</td></tr><tr><td>CA11, CA20</td><td>5</td></tr><tr><td>CA25, CG8, CH10-CHR16</td><td>4</td></tr></table>	Switch type	Max. no. of stages	CA10	6	CA11, CA20	5	CA25, CG8, CH10-CHR16	4	KS12/CS12 KS52/CS52	M25 M20				
Switch type	Max. no. of stages														
CA10	6														
CA11, CA20	5														
CA25, CG8, CH10-CHR16	4														
Without cover interlock	KL10/CL10 KL50/CL50	M25 M20													
With cover interlock (the enclosure can only be opened at 9 o'clock position)	KL11/CL11 KL51/CL51	M25 M20													
	<p>With cover interlock (the enclosure can only be opened at 12 o'clock position)</p> <p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA10</td><td>3</td></tr><tr><td>CA11</td><td>2</td></tr><tr><td>CA20, CA25, CG8</td><td>2</td></tr><tr><td>CH10-CHR16</td><td>2</td></tr></table>	Switch type	Max. no. of stages	CA10	3	CA11	2	CA20, CA25, CG8	2	CH10-CHR16	2	KL12/CL12 KL52/CL52	M25 M20		
Switch type	Max. no. of stages														
CA10	3														
CA11	2														
CA20, CA25, CG8	2														
CH10-CHR16	2														





Dimensions p. 40



Dimensions p. 40

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

## Plastic Enclosures (Front Drive)

	<p>Protection IP 65</p> <p>Conduit entries with metric ISO-thread</p> <p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>A11, A25</td><td>7</td></tr><tr><td>CA10, CA11, CA20, CA25, CA10B<sup>1</sup>, CA11B, CA20B, CH10, CH16</td><td>4</td></tr><tr><td>CA40, CA50, CA63</td><td>6</td></tr><tr><td>C26, C42</td><td>4</td></tr><tr><td>C32</td><td>5</td></tr></table>	Switch type	Max. no. of stages	A11, A25	7	CA10, CA11, CA20, CA25, CA10B <sup>1</sup> , CA11B, CA20B, CH10, CH16	4	CA40, CA50, CA63	6	C26, C42	4	C32	5	<p>PF1</p> <p>PF4</p>	M20	M20		
Switch type	Max. no. of stages																	
A11, A25	7																	
CA10, CA11, CA20, CA25, CA10B <sup>1</sup> , CA11B, CA20B, CH10, CH16	4																	
CA40, CA50, CA63	6																	
C26, C42	4																	
C32	5																	
			M25															
	<p>Protection IP 42</p> <p>Conduit entries with metric ISO-thread</p> <p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>A11, A25</td><td>6</td></tr><tr><td>CA10, CA11, CA20, CA25, CA10B<sup>1</sup>, CA11B, CA20B, CH10, CH16</td><td>4</td></tr><tr><td>CA40, CA50, CA63</td><td>6</td></tr><tr><td>C26, C32</td><td>4</td></tr><tr><td>C42</td><td>3</td></tr></table>	Switch type	Max. no. of stages	A11, A25	6	CA10, CA11, CA20, CA25, CA10B <sup>1</sup> , CA11B, CA20B, CH10, CH16	4	CA40, CA50, CA63	6	C26, C32	4	C42	3	<p>PN1</p> <p>PN4</p>	M20	M20		
Switch type	Max. no. of stages																	
A11, A25	6																	
CA10, CA11, CA20, CA25, CA10B <sup>1</sup> , CA11B, CA20B, CH10, CH16	4																	
CA40, CA50, CA63	6																	
C26, C32	4																	
C42	3																	
			M25															
																		
<p><i>Dimensions p. 41</i></p> 																		
<p>A lamp can be installed on request.</p>																		

<sup>1</sup>Only for 4 stages.

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

 <p><i>Dimensions p. 42</i></p>	<p>Protection IP 44</p> <p>Conduit entries with metric ISO-thread</p> <p>Conduit entries without thread</p>	<p><b>PK1</b></p> <p><b>PK9</b></p>	<p>M25</p> <p>●</p>	<p>M25</p> <p>●</p>												
<p>The following switch types can be mounted:</p> <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>A11</td><td>12</td></tr><tr><td>CA10, CA10R</td><td>12</td></tr><tr><td>CA11, CA20, CAD11, CAD12</td><td>12</td></tr><tr><td>CA10B, CA11B, CA20B</td><td>12</td></tr></table>		Switch type	Max. no. of stages	A11	12	CA10, CA10R	12	CA11, CA20, CAD11, CAD12	12	CA10B, CA11B, CA20B	12					
Switch type	Max. no. of stages															
A11	12															
CA10, CA10R	12															
CA11, CA20, CAD11, CAD12	12															
CA10B, CA11B, CA20B	12															

## Aluminum Enclosures

Dimensions p. 42

Protection IP 65

Conduit entries with metric ISO-thread

Without conduit entries

The following switch types can be mounted:

Switch type	Max. no. of stages
A11, A25	10
CA10, CA10R	3
CA11	2
CA20	2
CA10B	12
CA11B	10
CA20B	10
CA25B	9
CA40, CA50, CA63	10

Additional conduit entries on request.

**GK1**

**GK9**


M20

M20

M25

**Dimensions**

## L100, L100A, L105A



Size	D
S0	13,8 .54
S1	18,5 .73

L = Shaft length  
L1 = Free shaft length max.  
1 = Only for square shaft

Size	L <sup>1</sup>	L1 <sup>1</sup>	L	L1	L	L1	L	L1	L	L1	D1	D2	A	SW
S0			60 2.36	40 1.57	80 3.15	60 2.36	100 3.94	80 3.15	120 4.72	100 3.94	6 .24	13.8 .54		12 .47
S1	56.5 2.22	20 .79	70 2.76	40 1.57	90 3.54	60 2.36	110 4.33	80 3.15	130 5.12	100 3.94	8.5 .34	18.5 .73	6 .24	16 .63
S2	70 2.76	40 1.57	100 3.94	70 2.76	130 5.12	100 3.94	160 6.30	130 5.12	190 7.48	160 6.30	11.2 .44	24.6 .97	8 .32	22 .87
S3	95 3.74	40 1.57	130 5.12	75 2.95	165 6.50	110 4.33	200 7.87	145 5.41	235 9.25	180 7.09	14 .55	35.1 1.38	10 .39	39 1.16

Technical drawing of a 1/2" NPT x 1/2" NPT female adapter. The drawing includes three views: a front view, a side view, and a top view. Dimensions are provided in inches (") and millimeters (mm).

**Front View Dimensions:**

- Overall length: 2.20"
- Threaded section length: 1.12"
- Threaded section outer diameter: max 6.24"
- Threaded section inner diameter: 28.5 mm
- Flange outer diameter: 56 mm
- Flange thickness: 2.20"

**Side View Dimensions:**

- Overall length: 1.65"
- Threaded section length: 0.04" - 0.26"
- Threaded section outer diameter: max 6.24"
- Threaded section inner diameter: 28.5 mm
- Flange outer diameter: 56 mm
- Flange thickness: 2.20"

**Top View Dimensions:**

- Overall diameter: 1.81"
- Threaded section outer diameter: 1.201"
- Threaded section inner diameter: 0.85"
- Flange outer diameter: 1.201"
- Flange thickness: 0.189"
- Flange inner diameter: 0.85"
- Flange outer diameter: 1.201"
- Flange thickness: 0.189"

## Face plates



48,0 x 48,0 mm  
48,0 x 60,0 mm  
64,0 x 64,0 mm  
64,0 x 79,0 mm

**Q100/A**

Face plate

51,8 x 51,8 mm

**Q100B**

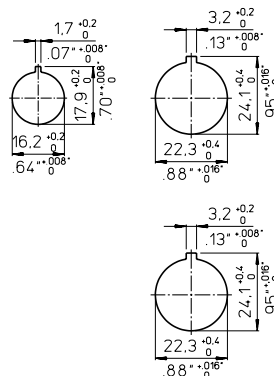

Without interlock

M = 17,7    C = 5

.70      .20

With interlock

$$M = 19,5 \quad C = 6,5$$

.77	.26
-----	-----


## Optional Extras

**Dimensions** mm  
inch

### Auxiliary Contacts


#### M510B

E mounting




Size	M	D
S1	16 .63	64 2.52
S2	18.7 .74	84 3.31
S3	17 .67	128 5.04

VE mounting

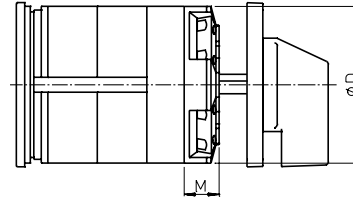

Size	M	D
S1	11.5 .45	64 2.52
S2	11.7 .46	84 3.31
S3	8 .31	128 5.04


### Simplified Door Clutch

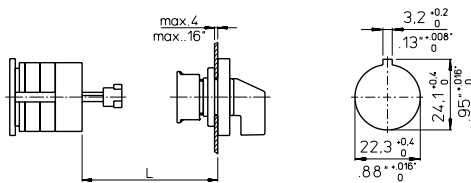


#### M295

		L	
		min.	max.
M295/A	S0/S1	27 1.06	112 4.41
M295/B	S0/S1	25 .98	90 3.54

#### V840E

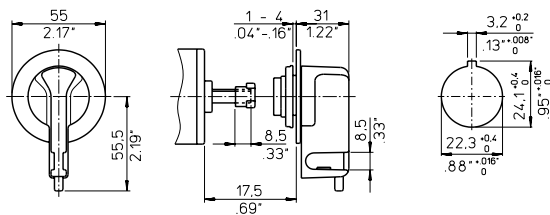


#### V840F/V840G

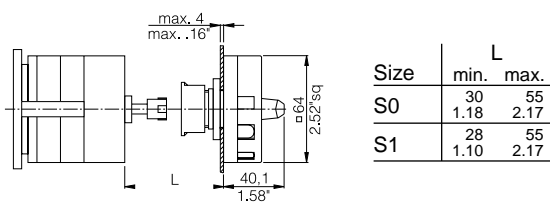


Size	L	
	min.	max.
S0	30 1.18	55 2.17
S1	28 1.10	55 2.17

#### V845




Size	A	C	H	L	
				min.	max.
S0	48 1.89	7.2 .28	52 2.05	30 1.18	55 2.17
S1	64 2.52	8.1 .32	58 2.28	28 1.10	55 2.17

#### M600

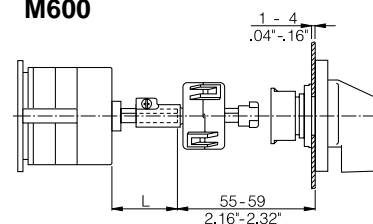


L see L100 and M004D page 26.


## Standard Door Clutch

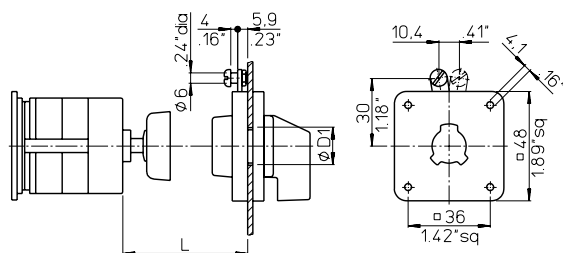**M280D, M280D/.EF, M280E, M280E/.EF**

For switches of size S0

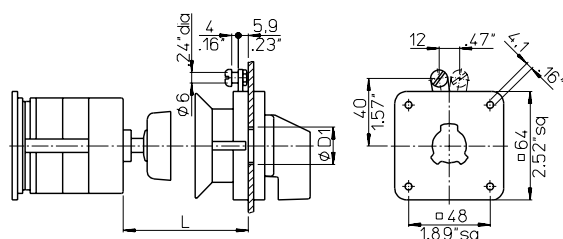





For switches of size S1 and S0 ●

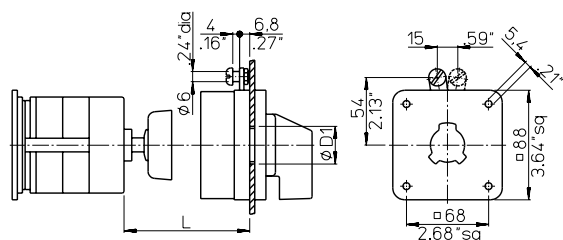

For switches of size S2 and S3

L = Shaft length

Size	L		L		L		L		D1
S0	36	55	56	75	76	95	96	116	19-22
	1.42	2.17	2.20	2.95	2.99	3.74	3.78	4.57	.75-.87
S0 ●	36	55	56	75	76	95	96	116	19-22
	1.42	2.17	2.20	2.95	2.99	3.74	3.78	4.57	.75-.87
S1	32	57	58	77	78	97	98	118	19-22
	1.26	2.24	2.28	3.03	3.07	3.82	3.86	4.65	.75-.87
S2	60	90	90	120	120	150	150	180	26-30
	2.36	3.54	3.54	4.72	4.72	5.91	5.91	7.09	1.02-1.18
S3	60	95	95	130	130	165	165	200	26-30
	2.36	3.74	3.74	5.12	5.12	6.50	6.50	7.87	1.02-1.18

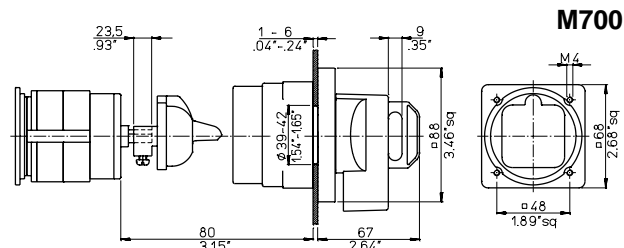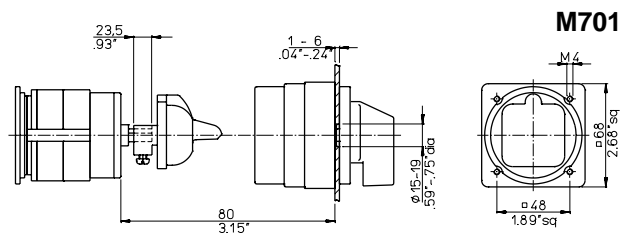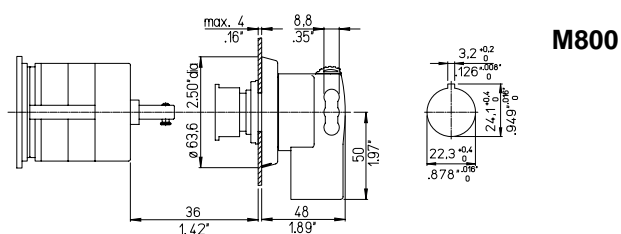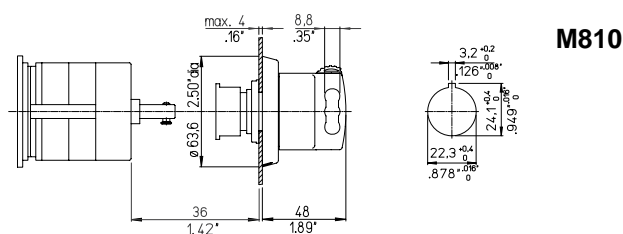**M700****M701****M800****M810**


## Optional Extras

**Dimensions** mm  
inch


### Indicator Lamp Device

#### Q200/A1, Q200/A2, Q200/B1, Q200/B2


For switches of size S0

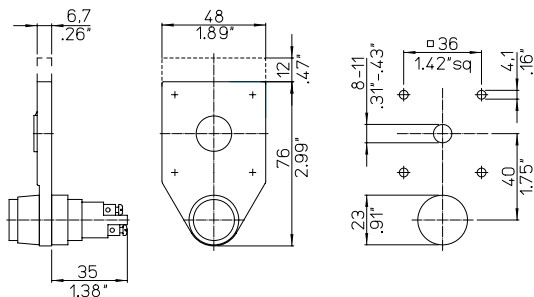


For switches of size S1

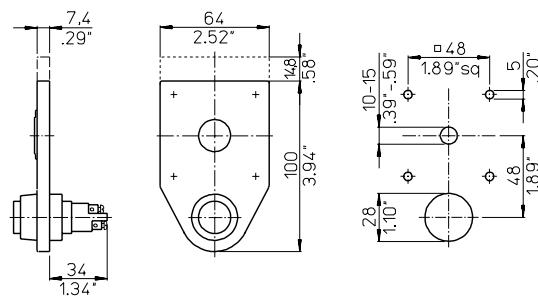

For switches of size S2

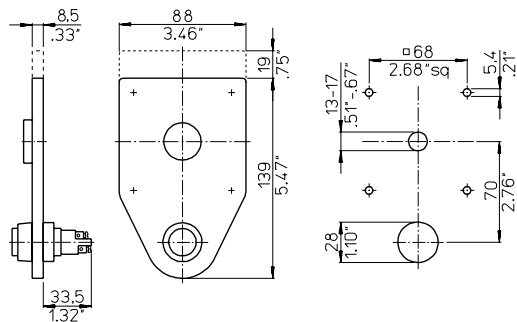


For switches of size S3

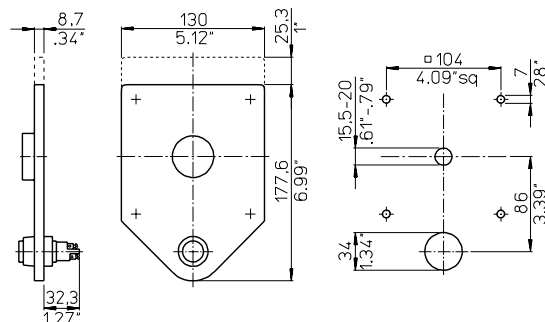


### Stop and Go Device

#### V160



### Spring Return over several Positions

#### M470/A, M470




Size	M470/A M	M470 M
S0 ●	33,3 1.31	33,3 1.31
S0 <sup>1</sup> ●	40,3 1.59	29,2 1.15
S1 <sup>1</sup>	33,3 1.31	22,2 .87
S2	75 2.95	

<sup>1</sup> shaft hole 18,5 mm/.73 inch


## Push-pull Interlock

## V110A, V115A, V130A, V135A

E, EG



FT2, FH3




M = Additional length of the switch

Mounting	E <sup>1</sup>		EG <sup>2</sup>		FT2		FH3	
	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A
M w/o a/c	17,5 .69	33,5 1.32	24,5 .96	40,5 1.59	24,0 .94	40,0 1.57	31,0 1.22	47,0 1.85
M with a/c	33,5 1.32	33,5 1.32	40,5 1.59	40,5 1.59	40,0 1.57	40,0 1.57	47,0 1.85	47,0 1.85
S	1-4 .04-.16	1-4 .04-.16	1-2 .04-.08	1-2 .04-.08	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24

<sup>1</sup>shaft hole 15-19 mm/.59-.75 inch<sup>2</sup>shaft hole 19-22 mm/.75-.87 inch

## V110, V115, V130, V135

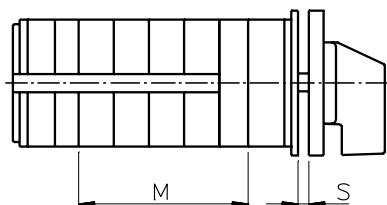


M = Additional length of the switch

Size	No. of auxiliary contacts				S
	0-2	3+4	5+6	7+8	
S1 <sup>1</sup>	39,9 1.57	57,4 2.26	74,9 2.95	92,4 3.64	0-4 0-.16
S1	29,5 1.16	47 1.85	64,5 2.54	82 3.23	0-4 0-.16

<sup>1</sup>For switch type CA..B, CH..B, CG..B, DH..B

## V110, V120, V130

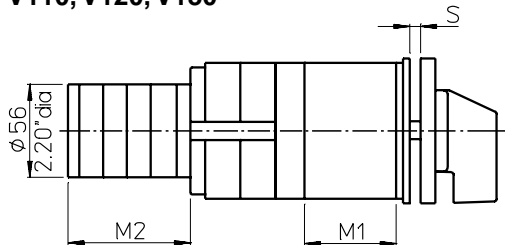

M1 = Additional length of the switch


M2 = Additional length of the auxiliary switch

Size	No. of auxiliary contacts					S
	0	1+2	3+4	5+6	7+8	
S1 <sup>1</sup>	51,7 2.04	101,4 3.99	120,4 4.74	139,4 5.49	158,4 6.24	0-4,5 0-.18
S2	69 2.72	127,6 5.02	146,6 5.77	165,6 6.52	184,6 7.27	0-5,5 0-.22
S3	85 3.35	151,6 5.96	170,5 6.71	189,5 7.46	208,5 8.21	0-7 0-.28

<sup>1</sup>Only for V120

## Interlock between Switches and Tandem Drive


## V600/B, V600/C, M300/B, M300/C, M300/D

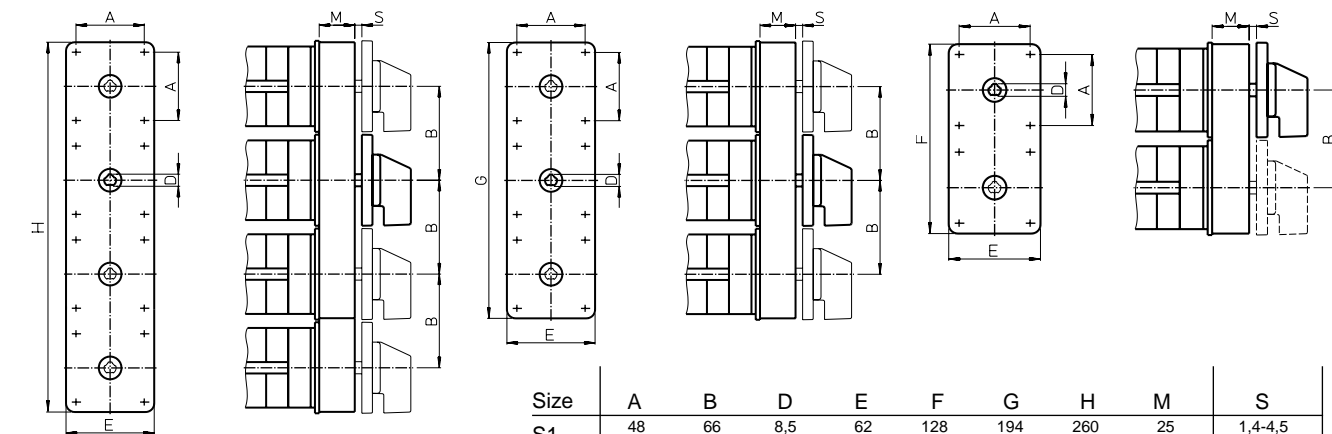

Size	A	B	D	E	F	G	H	M	S
S1	48 1.89	66 2.60	8,5 .34	62 2.44	128 5.04	194 7.64	260 10.24	25 .98	1,4-4,5 .06-.18
S2	68 2.68	93 3.66	11,2 .44	92 3.62	183 7.20	276 10.87	369 14.53	30 1.18	1,5-7,0 .06-.28
S3	88 3.46	144 5.67	14 .55	130 5.13	274 10.79	418 16.47	562 22.13	24 .94	1,5-8,3 .06-.33


## Push Button Interlock

## V400/A1, V400/A2, V400/B1, V400/B2

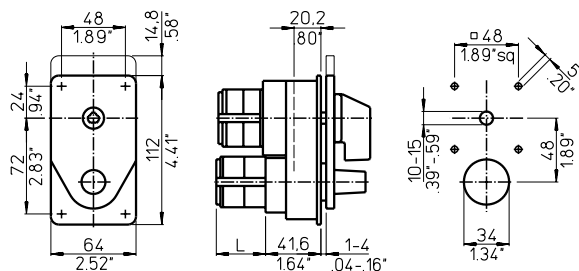


For switches of size S0 and S1

	No. of auxiliary contacts	
	2	4
L	21,7 .85	34,4 1.35

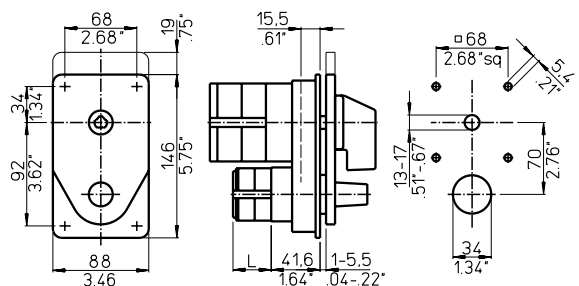

For switches of size S2

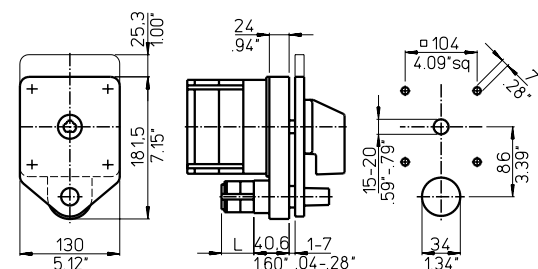

For switches of size S3

## Electromechanical Interlock


## V140

For switches of size S1

	M
S1	14
CA40-63, A25	36,2


For switches of size S1, S2 and S3

M1 = Additional length for the interlock  
M2 = Additional length for the coupling pieces of the solenoid  
Additional length for the solenoid upon request.

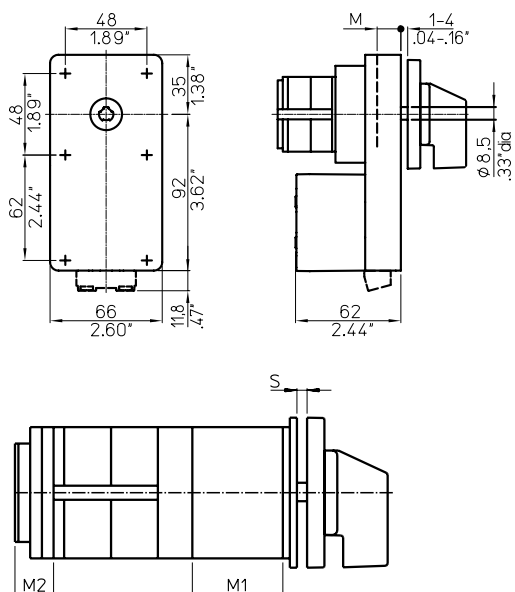

Size	M1 + M2	S
S1	56 2.20	0-4 0-16
S2	102 4.02	0-5,5 0-22
S3	111,1 4.37	0-7 0-28

## Bayonet/Switch Coupling

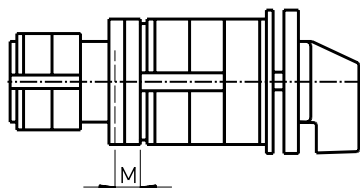
**M270**

Size	Coupled switch		
	S1	S2	S3
Main switch	M	M	M
S1	9,8 .39		
S2		12,9 .51	
S3			32,9 1.30

**M275**


Size	Coupled switch			
	S00	S0	S1	S2
Main switch	M	M	M	M
S0	0 0	5,5 .22		
S1	1,3 .05	0,8 .03		
S2	10,2 .40	4,4 .17	2,9 .11	
S3	12,7 .50	12,2 .48	11,4 .45	11,4 .45

## Slip Clutch and Ratchet Coupling

**M200, M230**

M = One switch stage

## Electromechanical Trip Device (Undervoltage Release and Shunt-trip)

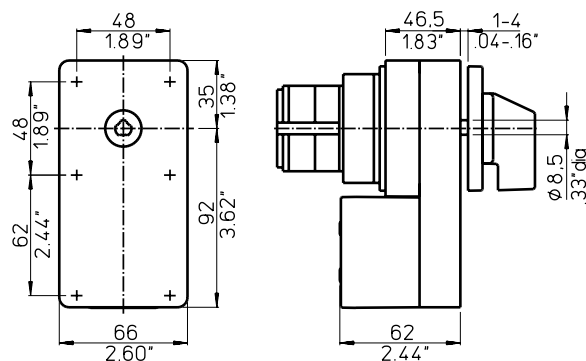
**V350/A, V350/B, V350/D  
V360/A, V360/B, V360/D**

## Optional Extras


**Dimensions** mm  
inch

### Special Drive Units


#### G800/A

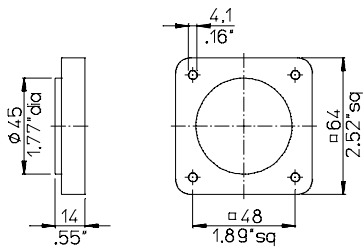


#### G800/B

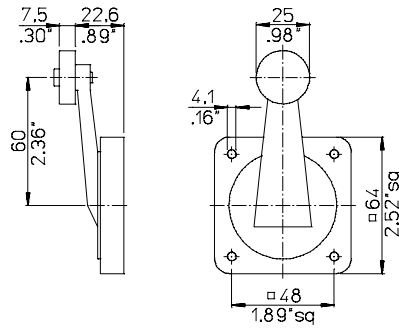

#### G800/C




#### G900/B

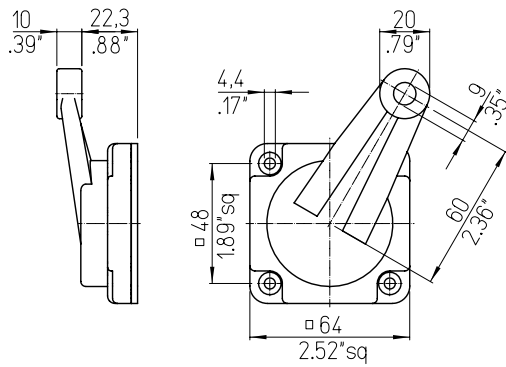


### Ground and Neutral Terminal

#### H040/E, H040/N, H040/NE




### Motor Drive

#### R300

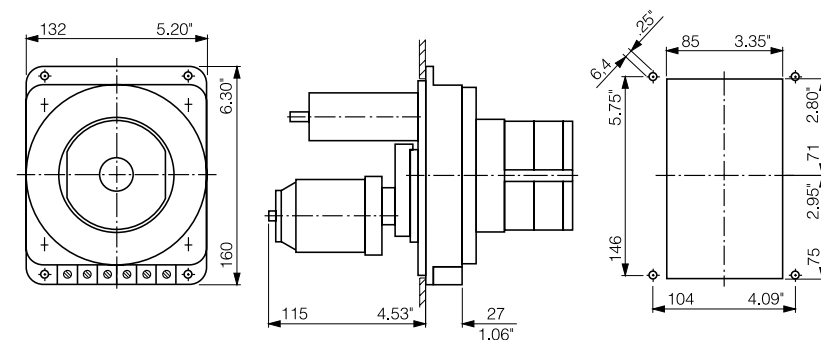


## Key-lock Device with small Cylinder Lock

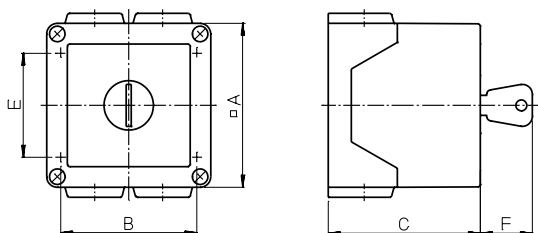


## V750

Switch type	No. of stages	A	B	C	E	F	Conduit entries 4 x ISO
CA10	2	64 2.52	50 1.97	68,8 2.71	36 1.42	26 1.02	20
CA11, CA20	1 + 2	82 3.23	68 2.68	75,5 2.97	52 2.05	29 1.14	20

For 1 stage CA10 switches with plaster depth trim

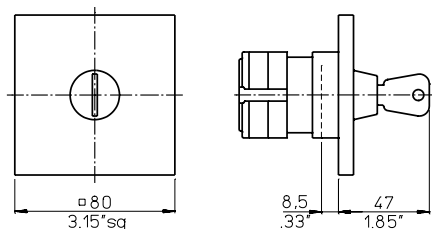

For base mounting with type of mounting VE21

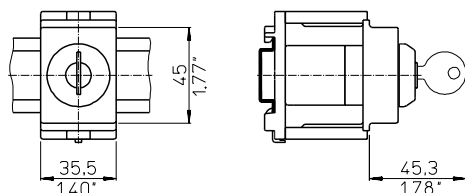

Switch Type	A	L
CA4, CG4	35,57 1.40	45,3 <sup>(1)</sup> 1.78
CA10, CA11, CA20, CA25, CG8, CH10, DH10	52,3 2.06	56,6 1.73

Fl.	CA4	CG4	CA10		CA11		CA20		CA25		CG8		CH10		DH10	
	S	S	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax	Smin	Smax
1	-	44 1.73	44 1.73	52 2.05	48 1.89	56 2.20	48 1.89	56 2.20	50 1.97	58 2.28	52 2.05	60 2.36	54 2.13	60 2.36	54 2.13	60 2.36
2	44 1.73	54 2.13	54 2.13	60 2.36	60 2.36	68 2.68	60 2.36	68 2.68	64 2.52	72 2.83	64 2.52	72 2.83	68 2.68	74 2.91	72 2.83	74 2.91
3	50 1.97	68 2.68	64 2.52	72 2.83	72 2.83	74 2.91	74 2.91	74 2.91	-	-	-	-	-	-	-	-
4	58 2.28	-	72 2.83	74 2.91	-	-	-	-	-	-	-	-	-	-	-	-
5	69 2.72	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

## V750D/1 and V750D/2


For single hole mounting combined with 16/22 mm

Front ring 29,5 mm Ø (mounting FS1)

Face plates

30 x 30 mm (mounting FS2)

30 x 39 mm (mounting FS4)

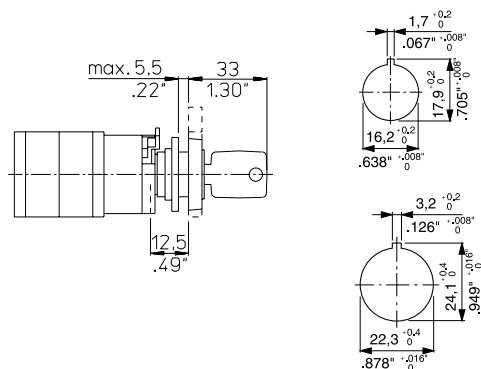

## V750D/3

For single hole mounting 22 mm

Front ring 39 mm Ø (mounting FT1)


Face plate

48 x 48 mm (mounting FT2)

64 x 64 mm (mounting FH3)

48 x 59 mm (mounting FT6)


64 x 78,5 mm (mounting FH4)

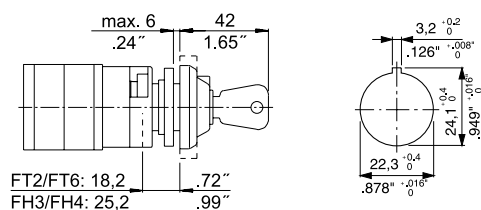FT2/FT6: 18,2  
FH3/FH4: 25,2

## Optional Extras

**Dimensions** mm  
inch


### Key-lock Device with Kaba Lock

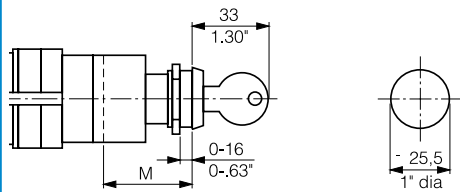

#### V750D

With front ring (mounting EL)

Locking program	M
1A-1G	37,2 1.46
2G-2L	47,2 1.86

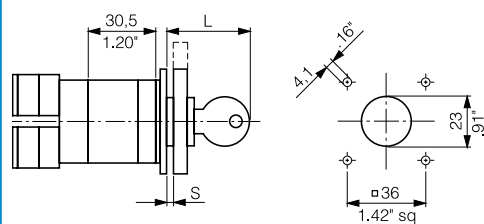


#### V750D/A, V750D/B

Face plates

48 x 48 mm (mounting E)

48 x 60 mm (mounting E)

Locking program	S	L
1A-1G	1-3,5 .04-.14	40,3 1.59
2G-2L	1-12,5 .04-.49	49,3 1.94

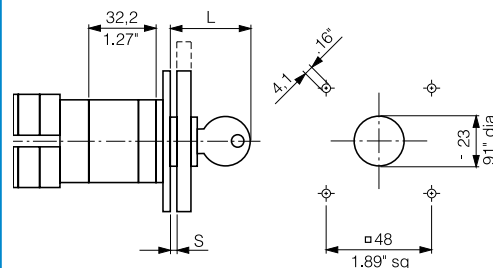


#### V750D/A, V750D/B

Face plates

64 x 64 mm (mounting EG)

64 x 78,8 mm (mounting EG)


Locking program	S	L
1A-1G	1-3,5 .04-.14	39,8 1.57
2G-2L	1-12,5 .04-.49	48,8 1.92




#### V750D (mounting VE2)

Max. no. of stages	CA10	CA11	CA20	CG8	CH10
S = 50 mm 1.97"	1	-	-	-	-
61 mm 2.40"	2	1	1	1	1
67 mm 2.64"	-	2	2	-	-
69 mm 2.72"	3	2	2	-	-

### Key-lock Device with Profile Cylinder

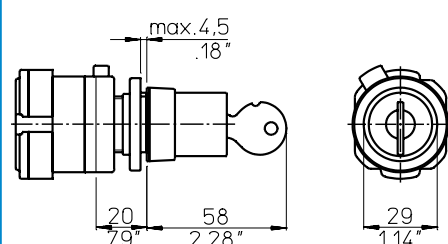


#### V750E



## Optional Extras

**Dimensions** mm  
inch

### Key-lock Device with Kaba Lock

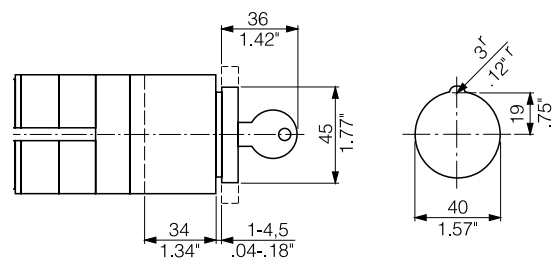


#### V750/A1

With face plate 64 x 64 mm  
With front ring


(mounting EL2)  
(mounting EL1)

### Key-lock Device with Half-cylinder Lock


#### V755.UE1

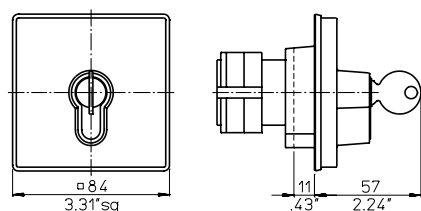

#### V755.E

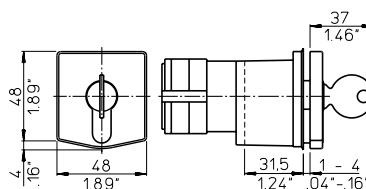


#### Different drilling plans

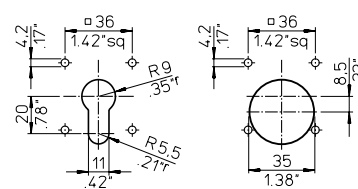


### Safety Key-lock Device with separate Drive

#### V760/A.E, V760/B.E, V760/A, V760/B

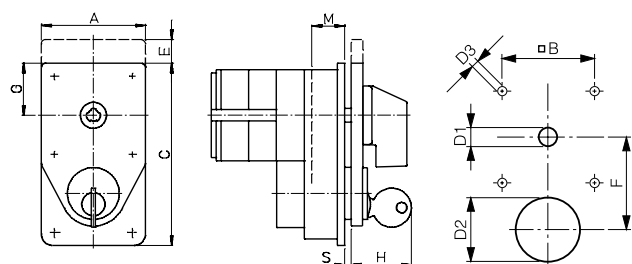


Size of the optional extra	A	B	C	E	F	G
S0	48 1.89	36 1.42	82 3.23	12 .47	40 1.57	24 .94
S1	64 2.52	48 1.89	112 4.41	14.8 .58	48 1.89	32 1.26
S2	88 3.46	68 2.68	146 5.75	—	70 2.76	44 1.73
S3	130 5.12	104 4.09	181.5 7.15	—	86 3.39	65 2.56
	H	D1	D2	D3	M	S
S0	31 1.22	8.5 .33	20 .79	5 .20	9.5 .37	1-4 .04-.16
S1	34.5 1.36	10 .39	34 1.34	5 .20	20.2 .80	1-4 .04-.16
S2	35.5 1.40	12 .47	34 1.34	5.4 .21	15.5 .61	1-5.5 .04-.22
S3	36.5 1.44	15 .59	34 1.34	7 .28	24 .94	1-7 .04-.28


#### V765

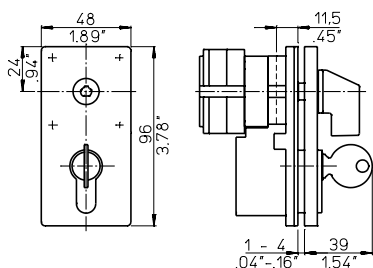



















#### Different drilling plans

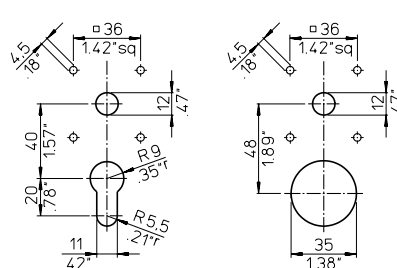

#### V790



## Padlock Device

**V840A**

For 2 padlocks

Size	A	B	C
S0	27.7 1.07	31.5 1.24	5 .20
S1	35 1.38	40 1.57	7 .28

**V840B**

For 2 padlocks

**V840D**

For 2 padlocks

**V840G, V840D**

For 3 padlocks

	A	B	C
V840G	64 2.52	40.1 1.58	9.2 .36
V840D	88 3.46	49.3 1.94	10 .39

**V840G/B**

For 3 padlocks

**V840F/F**

For 4 padlocks

**V840F/B**

For 4 padlocks

**V840K**

For 1 padlock

**V845, V846 (S1 only)**

Size	A	B	C
S0	48 1.89	51 2.01	7.2 .28
S1	64 2.52	58 2.28	8.1 .32
S2	88 3.46	73 2.87	9 .35
S3	130 5.12	86.5 3.41	9.2 .36

## Optional Extras

**Dimensions** mm  
inch

### Padlock Device

**V841**

**V842**

**V850**

For 2 padlocks

	D
S1 V850/A1	10-15/.39-.59
S1 V850/11	8-15/.31-.59
S1 V850/12	10-15/.39-.59
S1 V850/13	19-22/.75-.87

For 3 padlocks

	D
S2 V850/A1	26-30/1.02-1.18
S2 V850/11	10-15/.39-.59
S2 V850/12	26-30/1.02-1.18
S2 V850/13	26-30/1.02-1.18

For 6 padlocks

	D
S3 V850/A1	15.5-20/.61-.79
S3 V850/11	26-30/1.02-1.18
S3 V850/12	15.5-20/.61-.79
S3 V850/13	22-25/.87-.98

### PFR (Power Failure Release)

**Size S0**

Without trip-free release


M
23,3
.92

With trip-free release

31,5
1.24

**Size S1**


	M
S1	10,2
CA40-63, A25	22,9

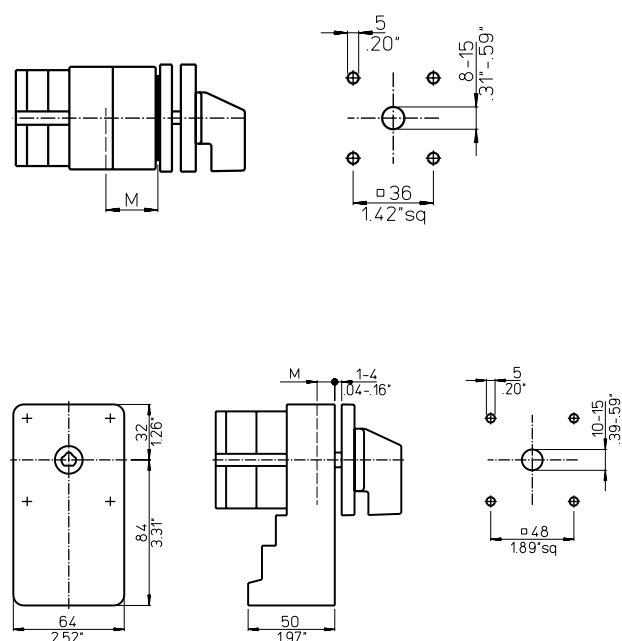

## Optional Extras


**Dimensions** mm  
inch

### Lockout-relays

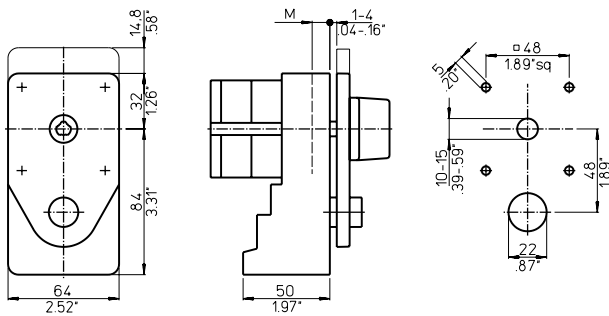

With manual release


	M
S0, S1	10,2
CA40-63, A25	22,9

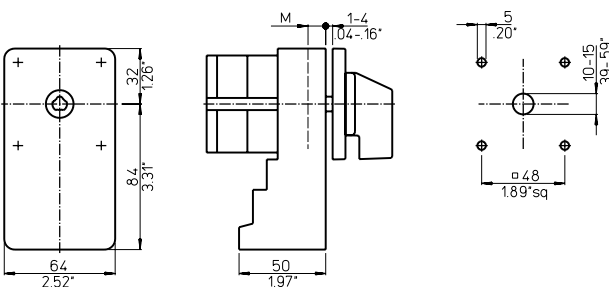


Without manual release

### Rectangular Add-on Face Plates

#### PRA




#### PRB




#### F991/...-..., F991/.../C-...

	PRA					PRB	
	S00	S0	S1	S2	S3	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	87,8 3.46	129,8 5.11	29,5 1.16	47,8 1.88
B	35 1.38	48 1.89	60 2.36	80 3.15	115 4.53	35 1.38	48 1.89
C	4 .16	4 .16	5 .20	6 .24	7 .28	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	1 .04	1,2 .05	0,7 .03	0,7 .03

#### PRC




#### PRD



	PRC			PRD	
	S00	S0	S1	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	29,5 1.16	47,8 1.88
B	25,5 .98	36 1.42	47 1.85	25,5 .98	36 1.42
C	4 .16	4 .16	5 .20	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	0,7 .03	0,7 .03

## Plastic Enclosures

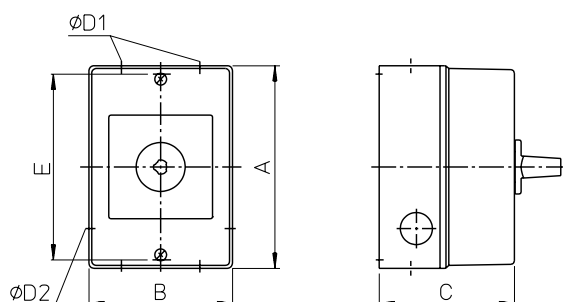

Mounting	Switch type	Max. no. of stages	A	B	C	Conduit entries		
						4 x D1	2 x D2	E
KS3 CS3	CA4	2	90	70	60	16	-	82
	CG4	1	3.54	2.76	2.36	.63		3.23
	CA4	3						
	CG4	2	90	70	77	16	-	82
	CG6	2	3.54	2.76	3.03	.63		3.23
KS10, KS11, KS12 CS10, CS11, CS12 KS50, KS51, KS52 CS50, CS51, CS52	CA10	4						
	CA11	3						
	CA20, CA25, CG8	2	120	85	80	20/25	20	110
	CH10-CHR16	2	4.72	3.35	3.15	.79/.98	.79	4.33
	CA10	6						
KL10, KL11, KL12 KL50, KL51, KL52 CL50, CL51, CL52 CL10, CL11, CL12	CA11, CA20	5	120	85	106	20/25	20	110
	CA25, CG8, CH10-CHR16	4	4.72	3.35	4.17	.79/.98	.79	4.33
	CA10	3						
	CA11, CA20, CA25, CG8	2	160	85	80	20/25	20	150
	CH10-CHR16	2	6.30	3.35	3.15	.79/.98	.79	5.91

Technical drawings of three switch types:

- CA10:** Top view shows a square base with a central circular feature. Dimensions: 36 mm (1.42 in) height, 50 mm (1.97 in) width, 4 mm (.16 in) thickness, 6.4 mm (2.52 in sq) central feature.
- CA11, CA20, CA10B, CA11B, CA20B, CH10, CH16, CA25:** Top view shows a square base with a central circular feature. Dimensions: 52 mm (2.05 in) height, 68 mm (2.68 in) width, 5 mm (.20 in) thickness, 8.2 mm (3.23 in sq) central feature.
- A11, A14, CA40, CA50, CA63:** Top view shows a square base with a central circular feature. Dimensions: 75 mm (2.95 in) height, 92 mm (3.62 in) width, 5.5 mm (.22 in) thickness, 10.6 mm (4.17 in sq) central feature.

A side view of the CA10 switch shows a rectangular profile with a central circular feature and a dimension 'C' for the width of the base.

For switch type  
CA10

For switch type  
CA11, CA20, CA10B,  
CA11B, CA20B, CH10,  
CH16, CA25

For switch type  
A11, A14, CA40, CA50,  
CA63




Switch type	No. of stages	PN. C	PF. C	ISO
A11, A14	1	67,5 2.66	73 2.87	M25
	2 + 3	89 3.50	94,5 3.72	
	4-6	132 5.20	137,5 5.41	
CA10	1	36,6 1.43	41,3 1.63	M20
	2	45,8 1.80	50,8 2.00	
	3	55,3 2.18	60,3 2.37	
	4	64,8 2.55	69,8 2.75	
CA11, CA20, CA11B, CA20B	1 + 2	59,7 2.35	64,7 2.55	M20
CA11, CA20, CA10B, CA11B, CA20B	3 + 4 <sup>1</sup>	85,1 3.35	90,1 3.55	M20
CH10, CH16	1	59,7 2.35	64,7 2.55	M20
	2 + 3	85,1 3.35	90,1 3.55	
	4	93 3.66	98 3.86	
CA25	1 + 2	59,7 2.35	64,7 2.55	M20
	3	85,1 3.35	90,1 3.55	
	4	93 3.66	98 3.86	
CA40, CA50, CA63	1	67,5 2.66	73 2.87	M25
	2 + 3	89 3.50	94,5 3.72	
	4 - 6	132 5.20	137,5 5.41	

<sup>1</sup>CA10B only for 4 stages

## Enclosures



**Dimensions** mm  
inch

### Plastic Enclosures (Lateral Drive)




Switch type	Max. no. of stages	A	B	C	E	F	G	Conduit entries		
								Z1	Z3	ISO
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	4 3	92 3.62	90 3.54	75 2.95	80 3.15	68 2.68	12 .47	●	-	M25
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	7 6 5	115 4.53	90 3.54	75 2.95	80 3.15	91 3.58	12 .47	-	●	M25
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	10 9 7	140 5.51	90 3.54	75 2.95	80 3.15	116 4.57	12 .47	-	●	M25
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	12 9	165 6.50	90 3.54	75 2.95	80 3.15	141 5.55	12 .47	-	●	M25
A11, CA11, CA20, CA11B, CA20B	11	190 7.48	90 3.54	75 2.95	80 3.15	166 6.54	12 .47	-	●	M25
A11, CA11, CA20, CA11B, CA20B	12	215 8.46	90 3.54	75 2.95	80 3.15	191 7.52	12 .47	-	●	M25

### Aluminum Enclosures



Switch types	No. of stages	A	B	C	E	F	F1	Conduit entries		
								Z1	Z2	ISO
CA10, CA10R CA11, CA20	3 2	80 3.15	75 2.95	57 2.24	63 2.48	-	52 2.05	●	-	M20
CA10B CA11B, CA20B CA25B	4 3 2	100 3.94	100 3.94	80 3.15	86 3.39	66 2.60	-	●	-	M20
A11, A14 CA10B CA11B CA20B, CA25B CA40, CA50, CA63	5 7 6 5 5	140 5.51	140 5.51	90 3.54	120 4.72	93 3.66	-	●	-	M25
A11, A14 CA10B CA11B, CA20B CA25B CA40, CA50, CA63	10 12 10 9 10	200 7.87	140 5.51	90 3.54	93 3.66	180 7.09	-	-	●	M25

**Notes:**

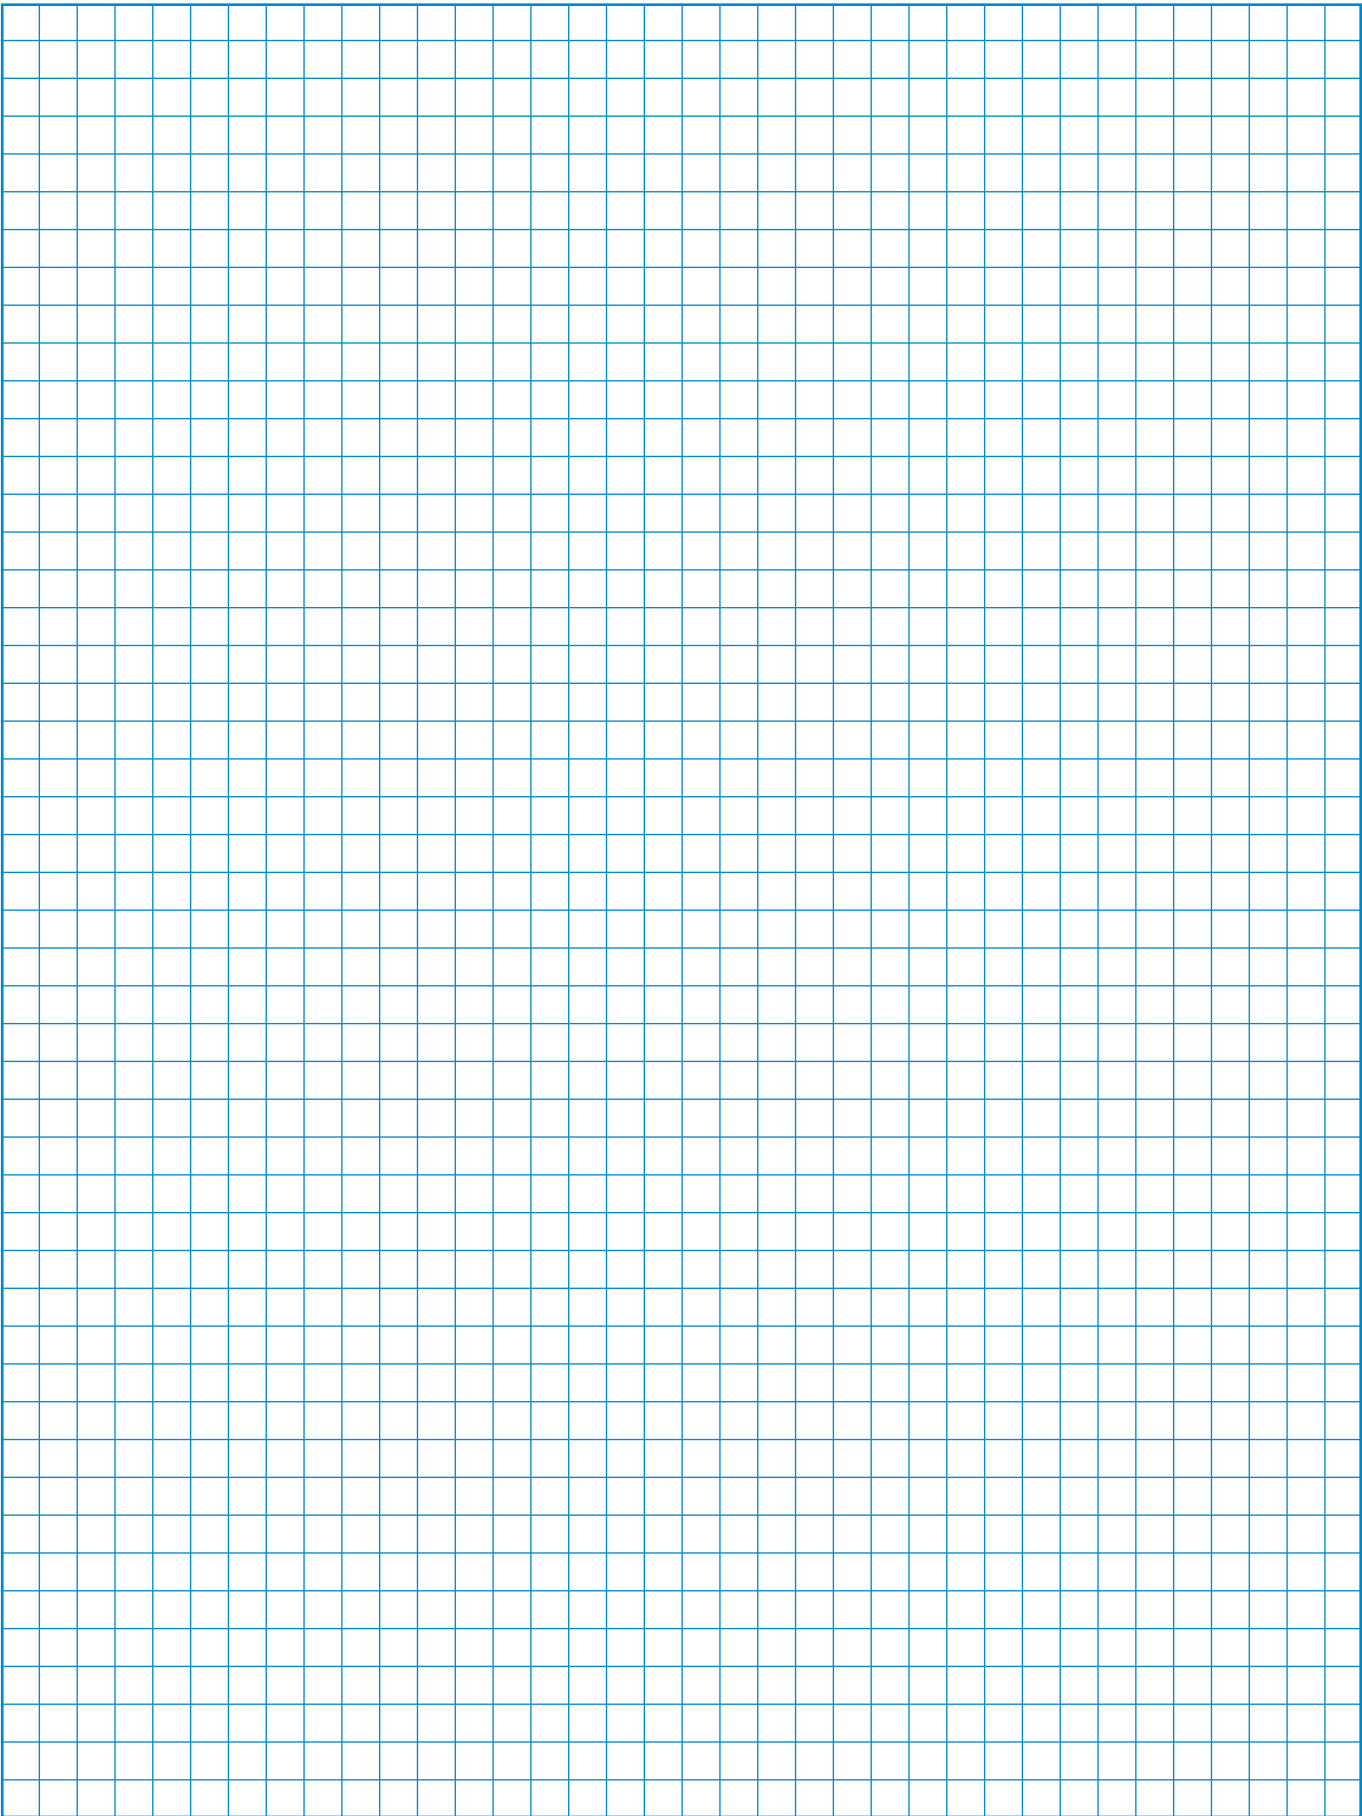

# The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
<b>Main Switches and Main Switches with Emergency Function 16 A-315 A</b> <b>Maintenance Switches 20 A-315 A</b> <b>Switch Disconnectors 20 A-315 A</b> According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	<b>500</b>
<b>C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A</b> C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	<b>100</b>
<b>Optional Extras and Enclosures</b> The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	<b>101</b>
<b>A and AD Switches 6 A-25 A</b> A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 24 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	<b>110</b>
<b>CG, CH and CHR Switches 10 A-25 A</b> Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	<b>120</b>
<b>DH, DHR, DK and DKR Switches 6 A-16 A</b> DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	<b>130</b>
<b>X Switches 200 A-630 A</b> X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	<b>140</b>
<b>KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A</b> KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	<b>150</b>
<b>Push Buttons and Pilot Lights, 22,5 mm Ø</b> A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	<b>302</b>

## SALES AND SERVICE ORGANIZATION

---

### Australia

**Kraus & Naimer Pty. Ltd.**  
379 Liverpool Road, ASHFIELD, N.S.W. 2131  
Tel: +61 2 9797-7333, Fax: 0092  
salesaus@krausnaimer.com

### Austria

**Kraus & Naimer GmbH**  
Schumanngasse 35, Postfach 431  
A-1181 WIEN  
Tel: +43 1 404 06-0, Fax: 404 06-190  
aso@krausnaimer.com

### Belgium, Luxembourg

**Kraus & Naimer B.V.**  
Ikaros Business Park  
Ikaroslaan 2  
B-1930 ZAVENTHEM  
Tel: +32 2 757-0141, Fax: 1640  
sales.be@krausnaimer.com

### Brazil

**Central and South America**  
**Kraus & Naimer Ind. Com. Ltda.**  
Rua Santa Monica, 1061  
Parque Industrial San Jose  
06715-865 Cotia - SP  
Tel: +55 11 2198-1288, Fax: 1251  
knbrasil@krausnaimer.com.br

### Canada

**Kraus & Naimer Ltd.**  
219 Connie Crescent, Unit: 13A  
CONCORD, Ontario, L4K 1L4  
Tel: +1 905 738-1666, Fax: 9327  
salescan@krausnaimer.com

### Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.  
72, Evagoras Pallikarides Str., CY-2235 LATSIA-Nicosia  
P. O. Box 12630, CY-2251 LATSIA-Nicosia  
Tel: +357 2 48 41 41, Fax: 48 57 47

### Czech Republic

OBZOR, výrobní družstvo Zlín  
Na Slanici 378  
CZ-76413 ZLÍN  
Tel: +420 57 7195-111/-153 (Techn. Supp.)  
Fax: +420 57 7195-152/-138  
ots@obzor.cz

### Denmark

THIIM A/S  
Transformervej 31  
DK-2730 HERLEV  
Tel: +45 4485 8000, Fax: 8005  
thiim@thiim.com

### Finland

**Kraus & Naimer Oy**  
Karitie 7  
FIN-01530 VANTAA  
Tel: +358 9 825-424-0, Fax: 424-10  
myynti@krausnaimer.com

### France

**Kraus & Naimer s.a.s.**  
33, rue Bobillot  
F-75013 PARIS  
Tél: +33 1 58 40 80 80, Fax: 45 80 91 19  
ventes@krausnaimer.com

### Germany

**Kraus & Naimer GmbH**  
Wikingerstraße 20-28, D-76189 KARLSRUHE  
Postfach 10 01 24, D-76231 KARLSRUHE  
Tel: +49 721 59 88-0, Fax: 59 28 28  
sales.ger@krausnaimer.com

### Great Britain

**Kraus & Naimer Ltd.**  
115 London Road  
NEWBURY/BERKSHIRE RG14 2AH  
Tel: +44 1635 262626, Fax: 37807  
sales-uk@krausnaimer.com

### Greece

KALAMARAKIS-SAPOUNAS S. A.  
Ionias & Neromilou Str., P. O. Box 46566  
GR-13671 ACHARNES/ATHENS  
Tel: +30 2 10 240-6000-6, Fax: 240-6007  
kalamarakis.sapounas@ksa.gr

### Hungary

GANZ, Schalter- u. Gerätefabrik  
X. Kőbányai út 41/c, Postfach 87  
H-1475 BUDAPEST  
Tel: +36 1 261-5479, Fax: 4685  
ganzkk@ganzkk.hu

### Iceland

BRAEDURNIR ORMSSON EHF  
Lágmúli 6-8, P. O. Box 8670  
REYKJAVIK  
Tel: +354 530-28 00, Fax: 28 10  
skuli@ormsson.is

### India

Liaison Office, **Kraus & Naimer Pte. Ltd.**  
108, 1st Floor, Infinity,  
Ashar Commercial Complex, Gladly Alwares Road  
Off Pokhran Road no. 2,  
THANE (W) 400 610  
Tel: +91 22 66716451, Fax: 66716451  
india@krausnaimer.com

### Republic of Ireland

**Kraus & Naimer Ltd.**  
Bay 145, Shannon Free Zone  
SHANNON, Co. Clare  
Tel: +353 61 704700, Fax: 471084  
sales-ie@krausnaimer.com

### Italy

**Kraus & Naimer s.r.l.**  
Via Terracini, 9  
I-24047 TREVIGLIO (BG)  
Tel: +39 0363-30 11 12, Fax: 30 21 13  
SalesItaly@krausnaimer.com

### Japan

**Kraus & Naimer Ltd.**  
Yoshiwada Building 2F  
1-11-6 Hamamatsucho  
Minato-Ku, TOKYO 105-0013  
Tel: +81 3 3436-6151, Fax: 6325  
sales-jpn@krausnaimer.com

### Mexico

JC Ingeniería y Control, SA de CV.  
Ángel Gavino 30.  
C. Satélite, C. Medicos,  
Naucalpan Edo. de Mexico, C.P. 53100  
Tel. (+52 55) 55 62 75 77, Fax. 55 62 04 34  
ventas@jcingenieriacontrol.com

### Middle East - UAE

Branch Office, **Kraus & Naimer Pte. Ltd.**  
SAIF Zone, P. O. Box 121607,  
Sharjah, UAE  
Tel: +971 6 557 8886  
Fax: +971 6 557 8088  
uae@krausnaimer.com

### Netherlands

**Kraus & Naimer B.V.**  
Wegtersweg 38-40, Postbus 199  
NL-7556 BR HENGLO (Ov.)  
Tel: +31 74 291-9441, Fax: 8380  
sales.nl@krausnaimer.com

### New Zealand

**Kraus & Naimer Ltd.**  
42 Miramar Avenue, WELLINGTON 6022  
P. O. Box 15-009, WELLINGTON 6243  
Tel: +64 4 380-9888, Fax: 9877  
sales-nz@krausnaimer.com

### Norway

**Kraus & Naimer AS**  
Hjalmar Brantings vei 8, P. O. Box 21, Økern  
N-0508 OSLO  
Tel: +47 22 64 44 20, Fax: 65 39 49  
ordre.no@krausnaimer.com

### Poland

ASTAT sp. z o.o.  
ul. Dąbrowskiego 461  
PL-60451 POZNAN  
Tel: +48 61 848-8871/72, Fax: 8276  
info@astat.com.pl

### Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, LDA.  
Apartado 1063, S. Ant. Cavaleiros  
P-2670 LOURES  
Tel: +351 21 989-8939, Fax: 988-6464  
Im.emertex@electricol.pt

### Singapore

**Kraus & Naimer Pte. Ltd.**  
Blk 115A, Commonwealth Drive  
#03-17/23  
SINGAPORE 149 596  
Tel: +65 6473-8166, Fax: 8643  
sgp@krausnaimer.com

### Slovenia

SCHRACK Technik d.o.o.  
Pameče 175  
SI-2380 Slovenj Gradec  
Tel: +386 2 883 92 00, Fax: +386 2 884 34 71  
m.abeln@schrack.si

### Republic of South Africa

**Kraus & Naimer Pty. Ltd.**  
7 Village Crescent, Linbro Village  
Linbro Business Park, SANDTON 2065  
P. O. Box 511, KELVIN 2054  
Tel: +27 11 608-6060, Fax: 608-2874  
salesZAF@krausnaimer.com

### Spain

**Kraus & Naimer B.V.**  
Tel: +34 662 696 014  
sales.es@krausnaimer.com

### Sweden

**Kraus & Naimer AB**  
Dr. Widerströms Gata 11, FRUÅNGEN  
Box 42097, S-126 14 STOCKHOLM  
Tel: +46 8 97 00 80, Fax: 97 87 33  
order.se@krausnaimer.com

### Switzerland

AWAG Elektrotechnik AG  
Sandbühlstraße 2, Postfach  
CH-8604 VOLKETSCHWIL  
Tel: +41 44 908 19 19, Fax: 19 99  
info@awag.ch, www.awag.ch

### Turkey

KARDEŞ ELEKTRİK SANAYİ VE TİCARET ANONİM ŞİRKETİ  
Beşyol, Eski Londra Asfaltı-6  
TR-34295 İSTANBUL-Sefaköy  
Tel: +90 212 624-9204, Fax: 592-4810  
info@unalkardes.com.tr

### USA

**Kraus & Naimer Inc.**  
760 New Brunswick Road  
SOMERSET, NJ 08873  
Tel: +1 732 560-1240, Fax: 8823  
salesusa@krausnaimer.com



# Kraus & Naimer

BLUE LINE switchgear



Contact us:

[www.krausnaimer.com](http://www.krausnaimer.com)