





Simulation Updates on PVDIS EC

Jin Huang
Los Alamos National Lab

EC performance w/o background

- ▶ Cited from March collaboration Meeting


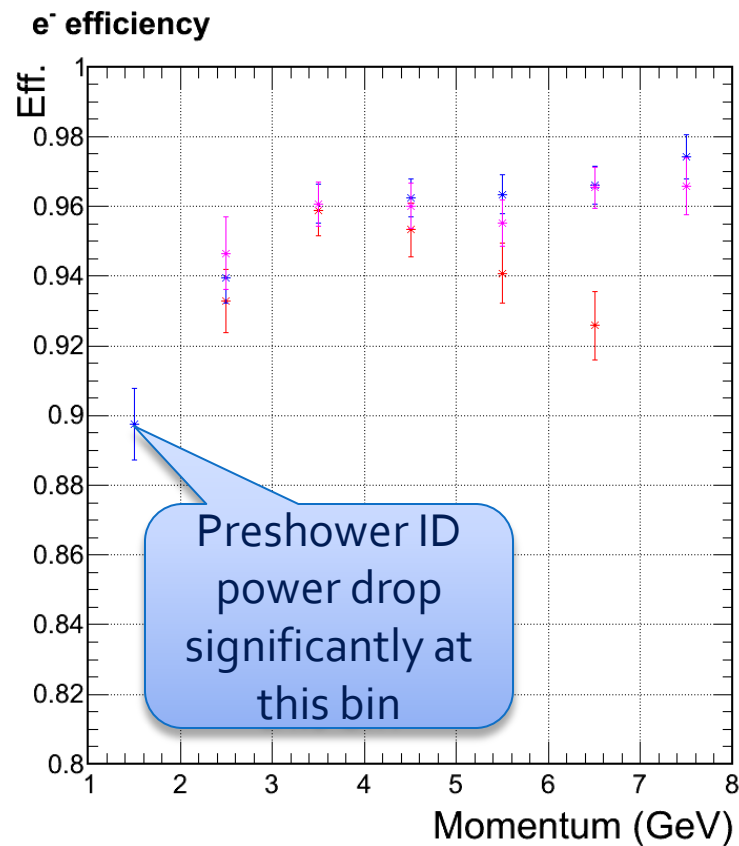
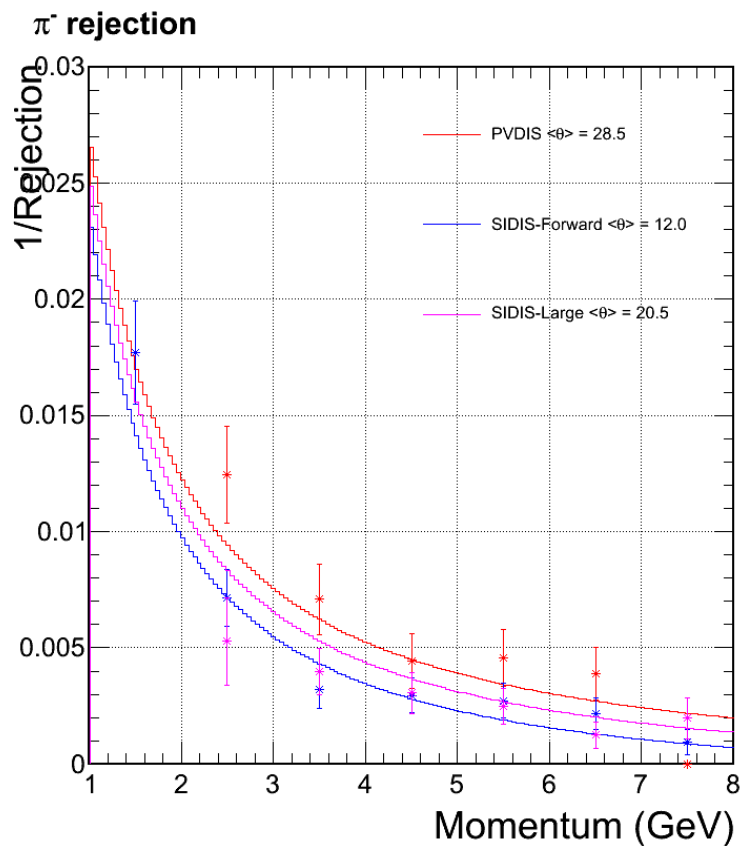


Third update of CLEO background

- »» Received background simulation from Zhiwen on May 19
- Running background imbedding

Updated radiation dose VS layers

- Photon (EM) <- dominant!
- Photon (Pi^0)
- Electron
- Pion- Pion+ Proton


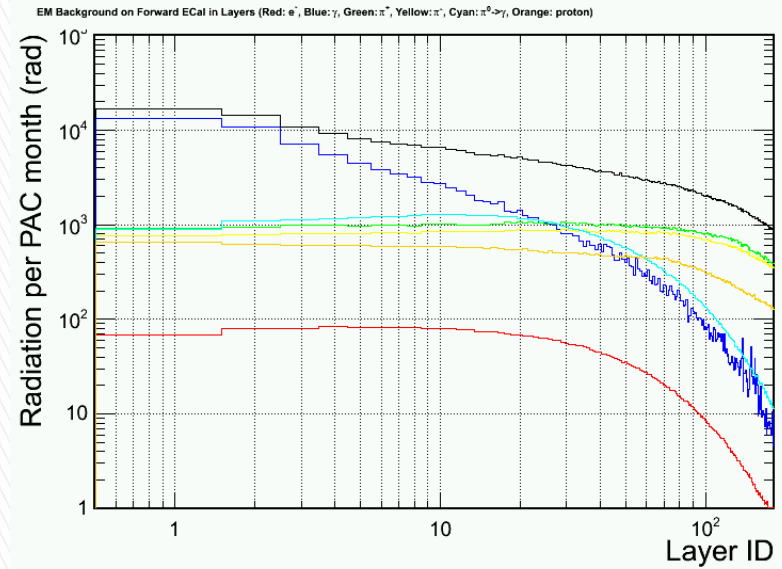
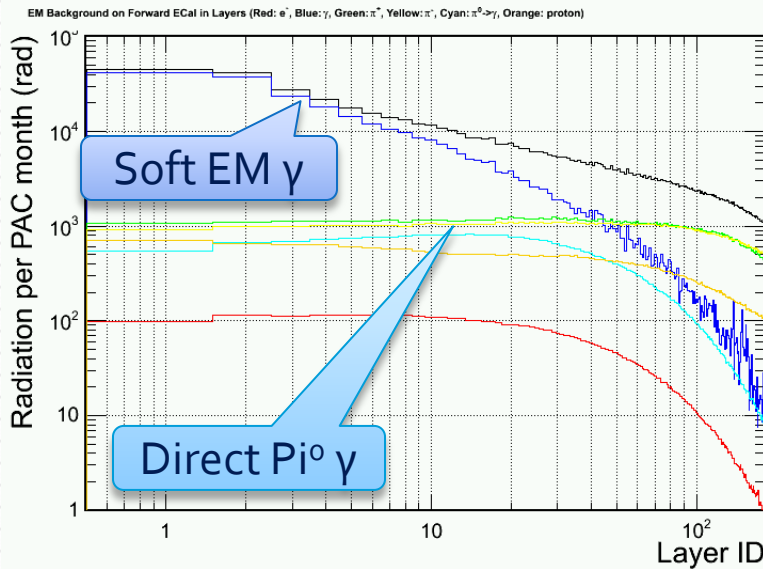
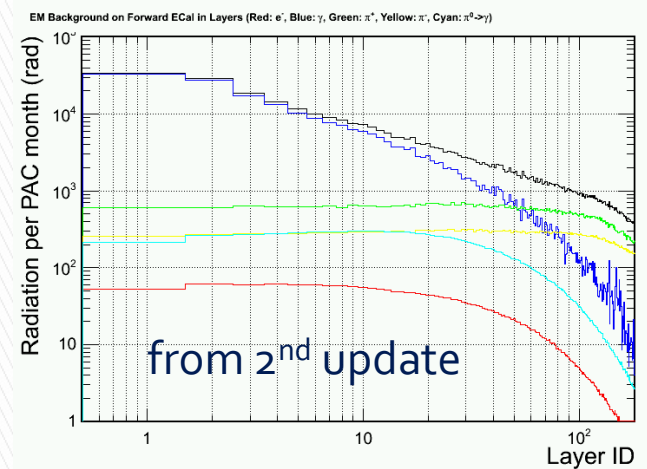


High radiation azimuthal region

Low radiation azimuthal region

Background imbedding and distribution

Mid-R, High Radiation phi slice

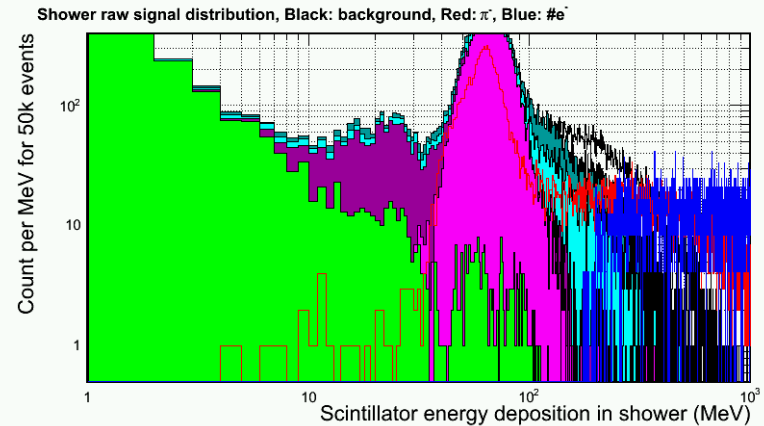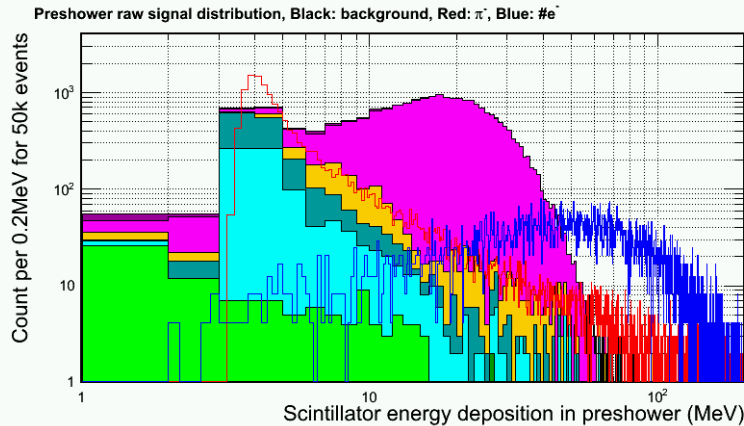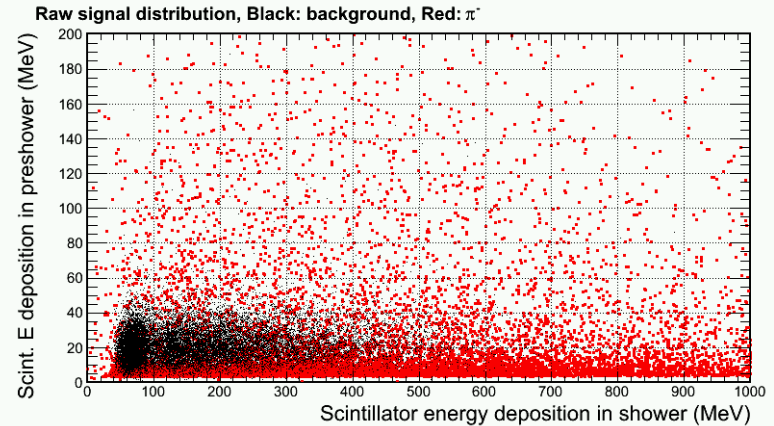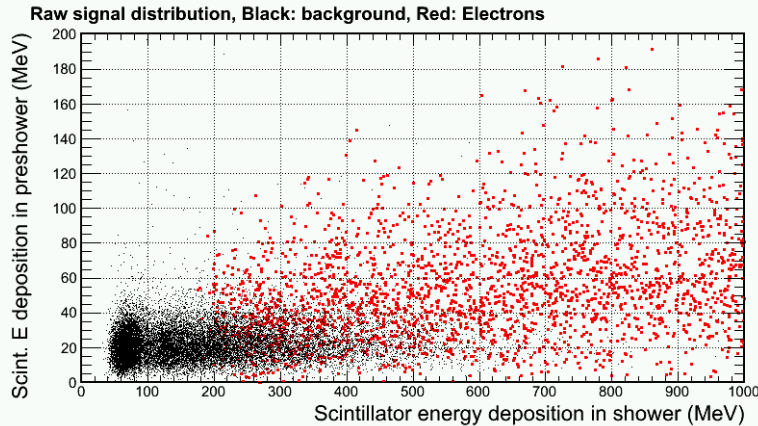


- Photon (6GHz/6+1 Hex cluster)
- Electron
- Pion- Pion+ Proton

Jin Huang <jinhuang@jlab.org>


EC group Internal Communication

Updated: Per-event pion rate

for 1+6 hexagon cluster at Mid radius, high radiation slice

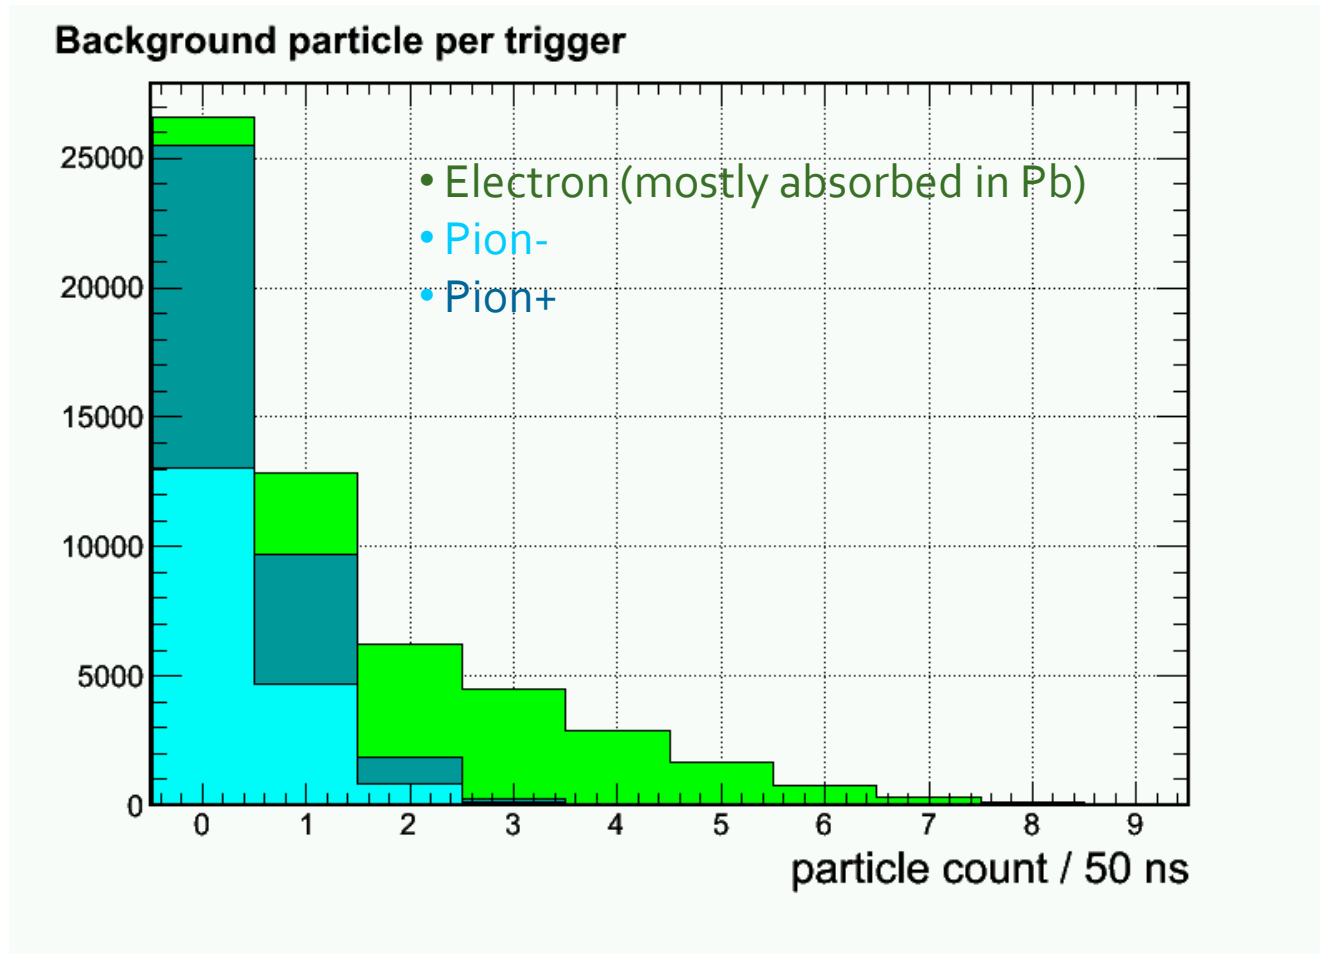

Readout occupancy per shower channel for $\sim 75\text{MeV}$ zero suppression


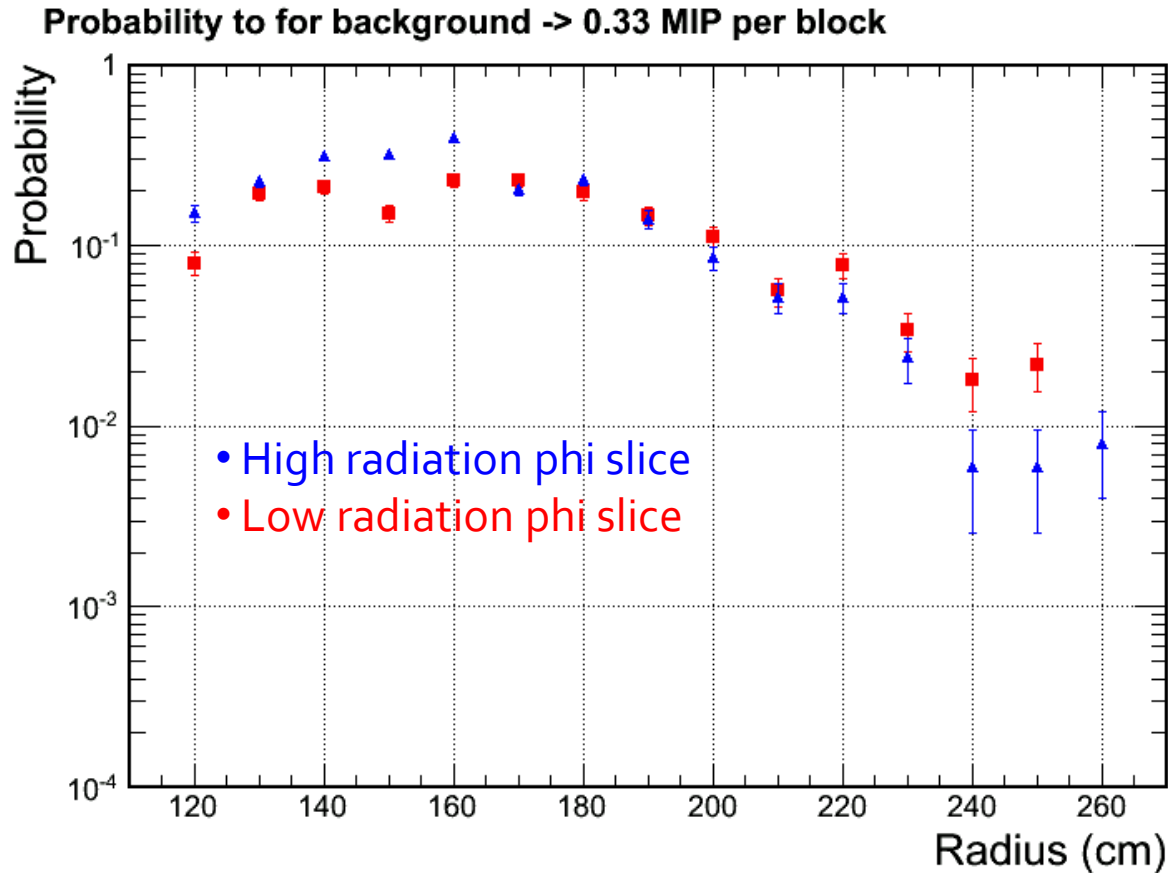


Trigger Study for Second update of CLEO background



»» Reported May 7 Calorimeter Meeting

Update on PID with DC component removal (MIP + 2.5 σ)

Outer radius, higher γ ϕ -band

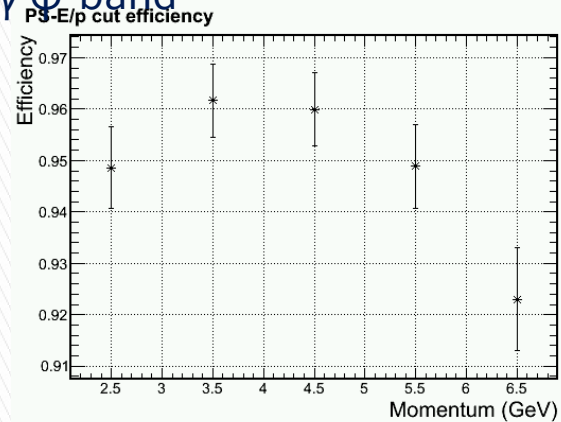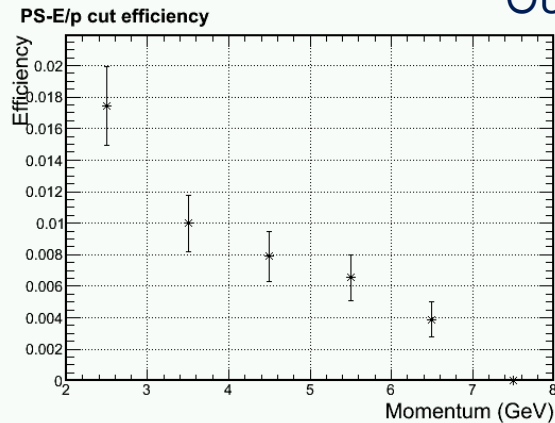

Mid radius, higher γ ϕ -band

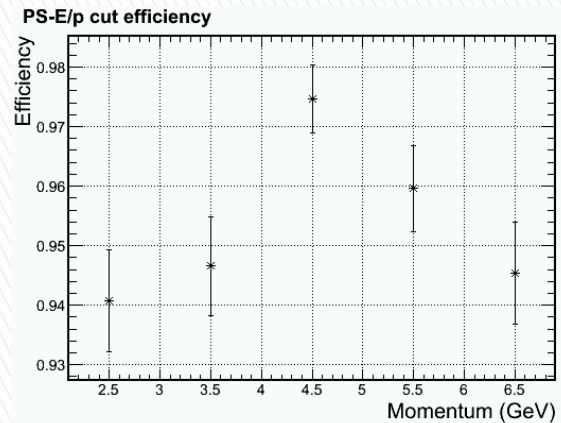
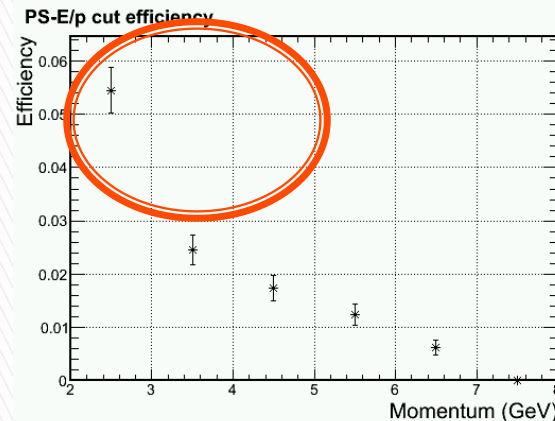


Pion Efficiency



Electron Efficiency

Update on PID with DC component removal (MIP + 2.5 σ)

Inner radius, higher γ ϕ -band

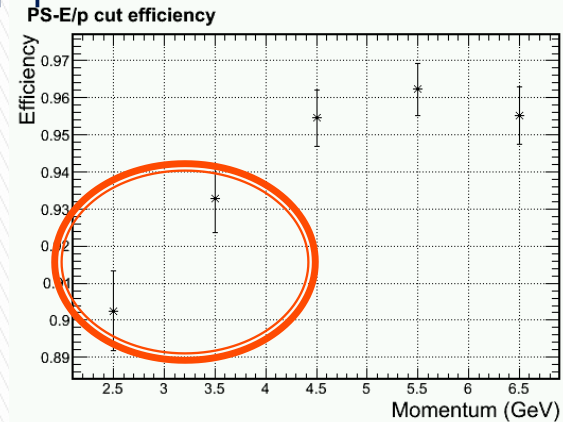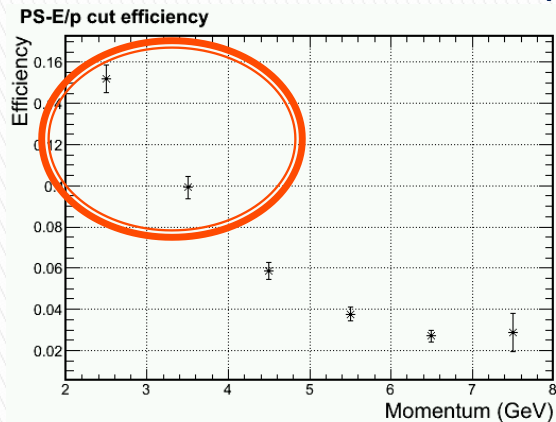



Inner radius, lower γ ϕ -band

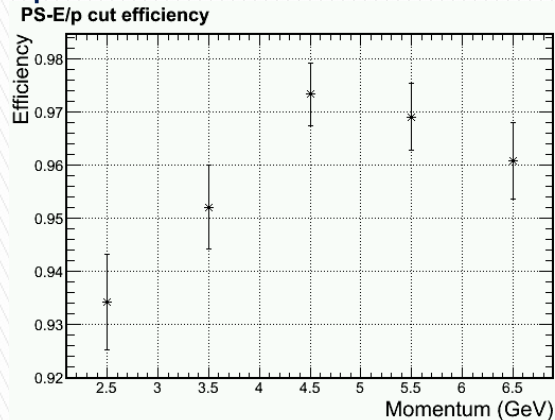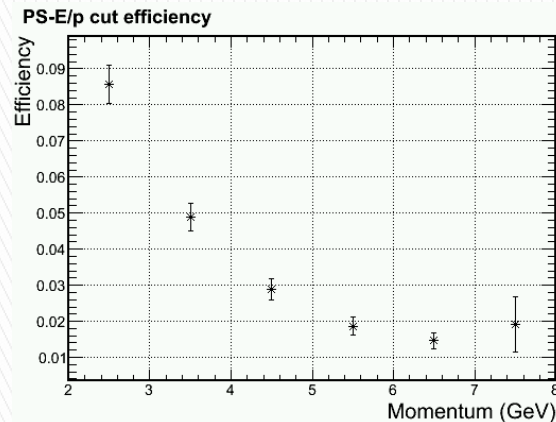

Pion Efficiency

Electron Efficiency

Pion Trigger Turn-On Curve (No background), Electron Eff. > 97%

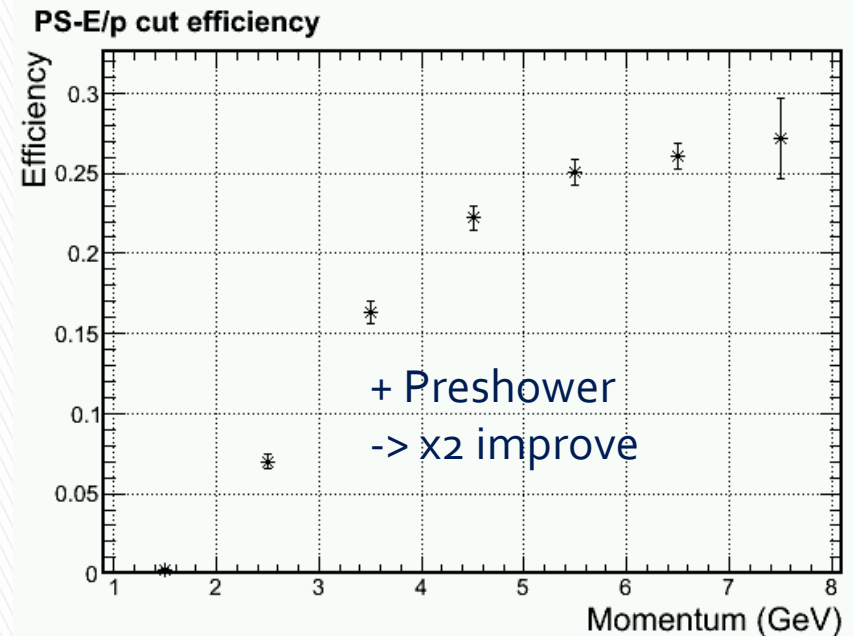
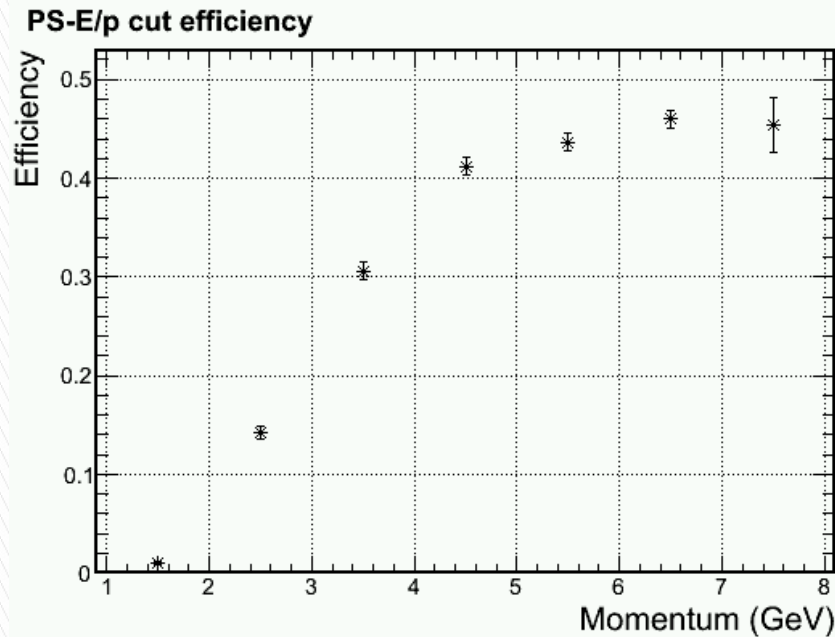


Hex 1+6 Shower Trigger >
1.6GeV (for 2GeV electron)



+ Preshower Pad on top of
central shower block > MIP + 1σ

Trigger turn on curve with background

Middle radius, higher γ ϕ -band

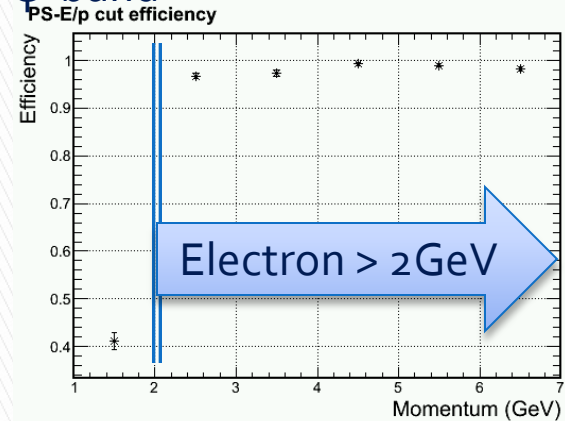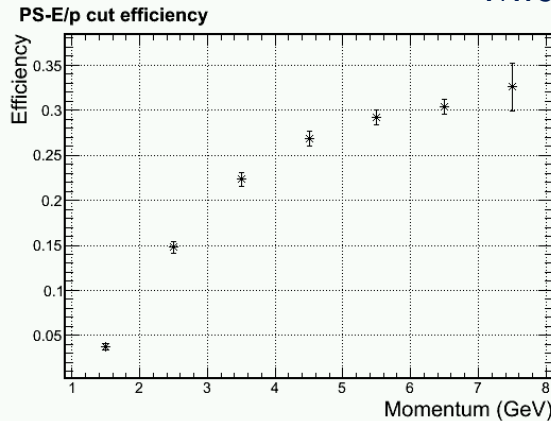

Inner radius, higher γ ϕ -band

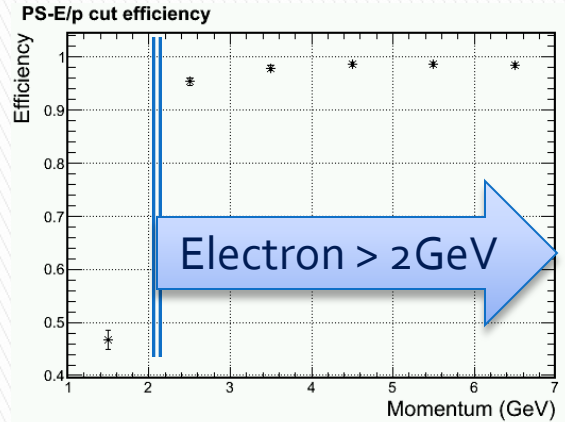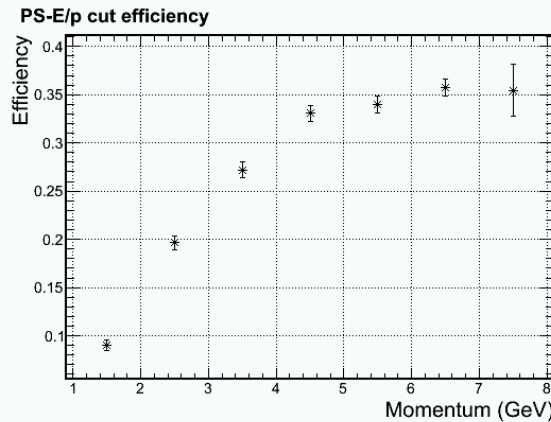


Pion Efficiency

Electron Efficiency

All background particle pile ups

- ▶ Look at single Hexagon shower blocks which passed 0.75 MIP cut.
 - Full background spectrum used
 - ADC integration window = 50ns
- ▶ ~10% blocks will produce a 0.75MIP signal for clock trigger
 - Data readout is least 10% of modules
 - A shower MIP trigger is likely just trigger on lower energy particles


- higher γ ϕ -band
- lower γ ϕ -band

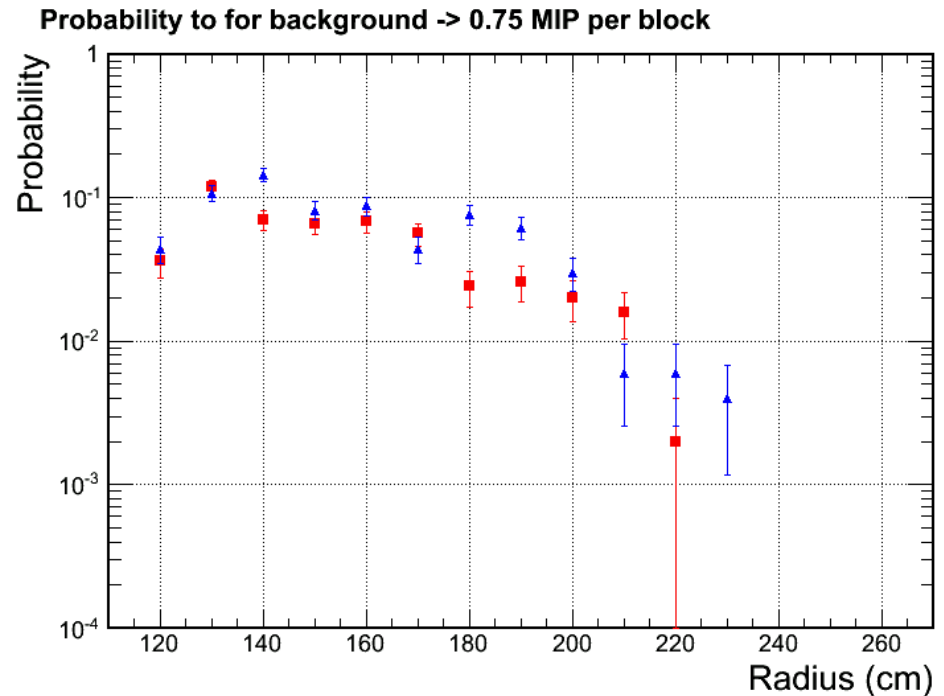

Quick estimation on impact of preshower radiation damage

- ▶ Radiation on preshower is high for PVDIS
 - Last meeting we showed that preshower will show radiation damage in a few months run in PVDIS configuration (assuming no cure for photon bgd)
 - Estimated light loss is a fraction depending on the choice of scintillator and fibers
- ▶ Our preshower was designed to produce high photon yield
 - Scint. thickness = 2cm with WLS imbedding
 - Expected photon / MIP = $140 e_\gamma$
 - After 50% radiation damage ($70 e_\gamma$), MIP resolution from photon fluctuation = 12%
 - Intrinsic fluctuation on MIP sampling = 23%, PID cut on MIP + 2.5σ
 - Therefore, effect on radiation damage to MIP resolution is expected to be minimal, as long as we calibrate the photon yield online

Beam test for LHCb pad (1.5cm thick)
From LHCb technical design report



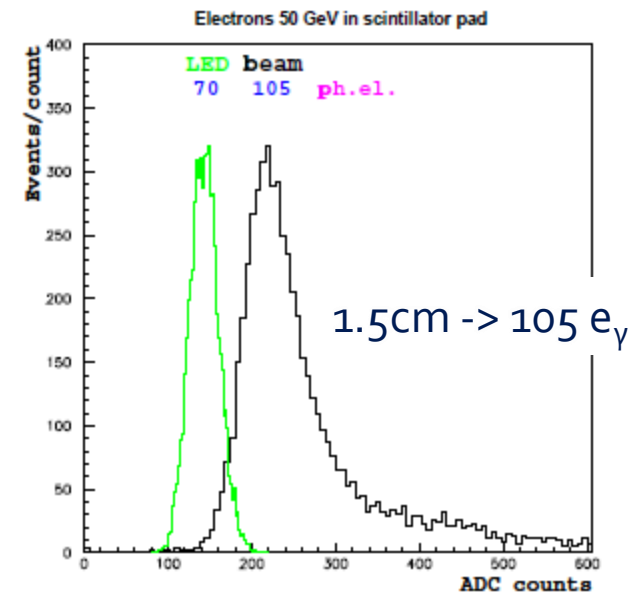


Second update of CLEO background

- »» Reported Apr 30 Calorimeter Meeting

For each sector, background rate were calculated in high and low regions in phi

- Photon (EM) <- dominant!
- Photon (Pi^0)
- Electron
- Pion- Pion+


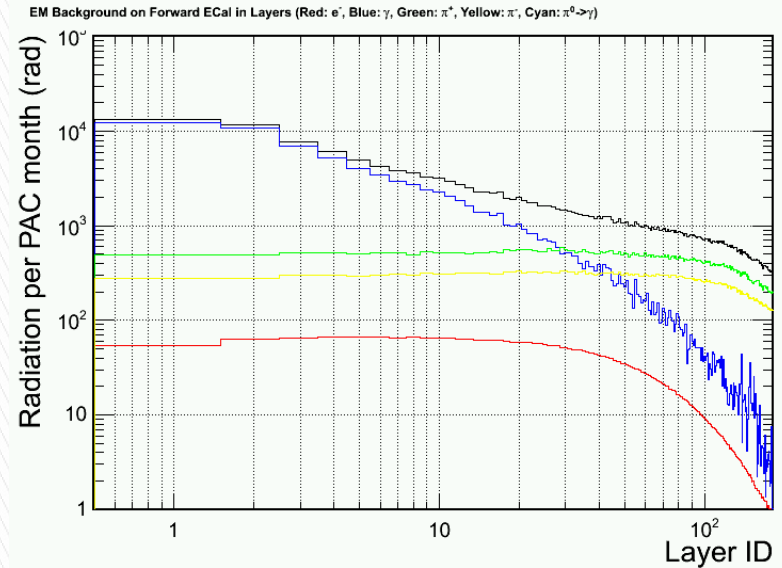
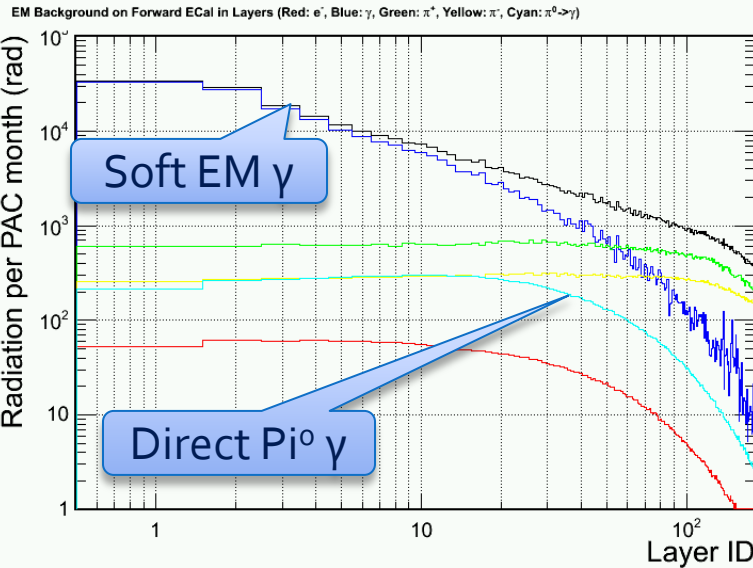
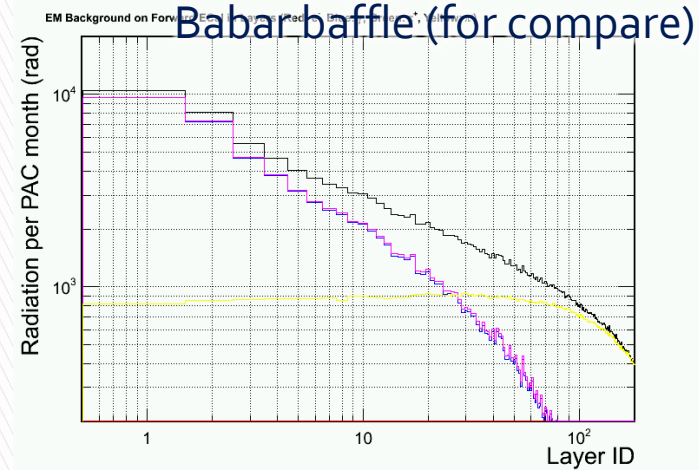


High radiation azimuthal region

Low radiation azimuthal region


Background distribution

New: with photon and pi+, Mid R, High Rad phi slice

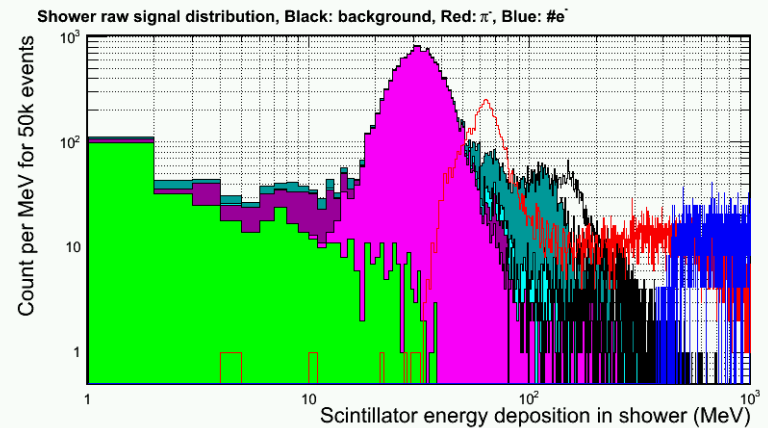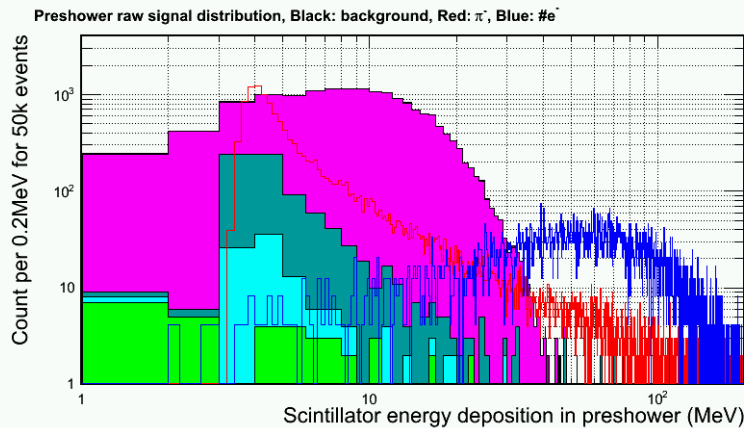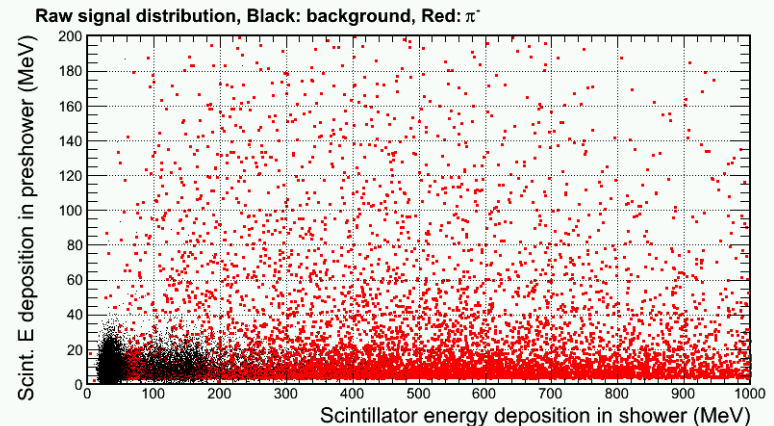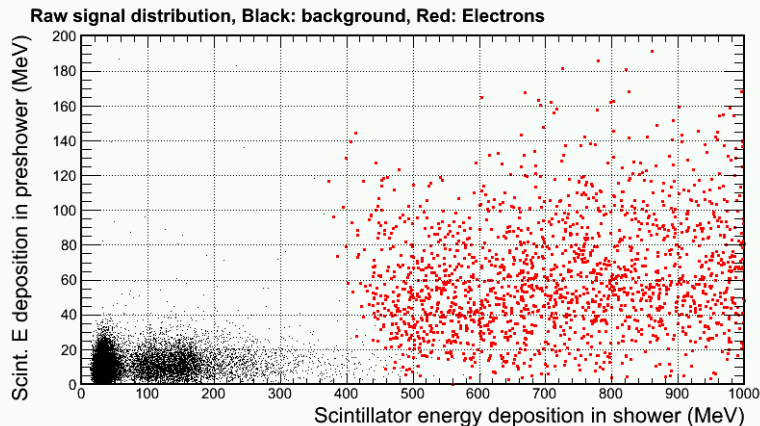


- Photon (7 GHz/6+1 Hex cluster!)
- Electron
- Pion- Pion+


PID Performance (pion eff. w/ 94% elec. eff) w/o photon and pi+, Mid R, High Rad phi slice

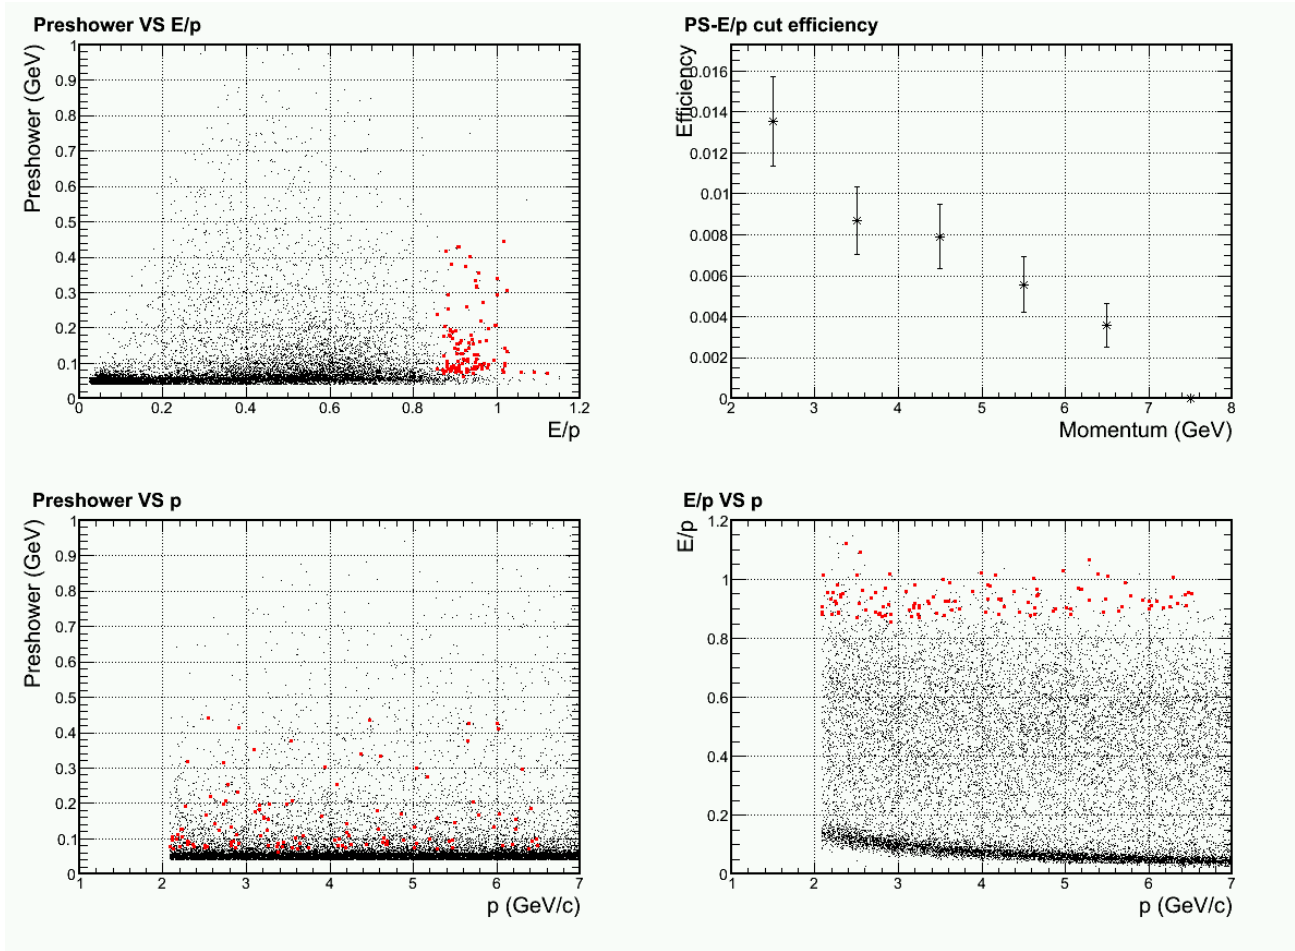

PID Performance (pion eff. w/ 94% elec. eff) w/o photon, w/ pi+, Mid R, High Rad phi slice

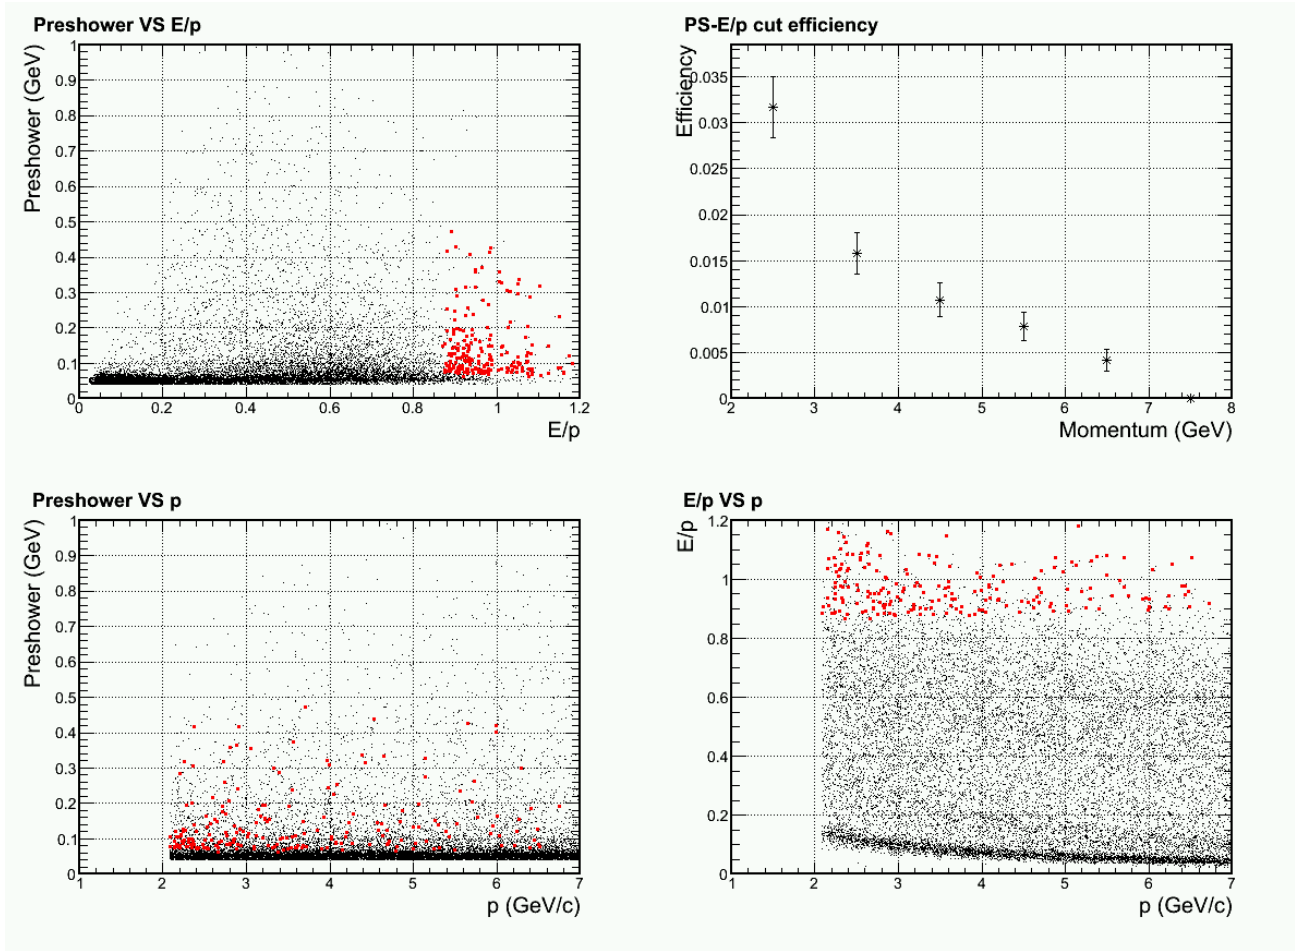



PID Performance (pion eff. w/ 94% elec. eff) w/ photon, w/ pi+, Mid R, High Rad phi slice

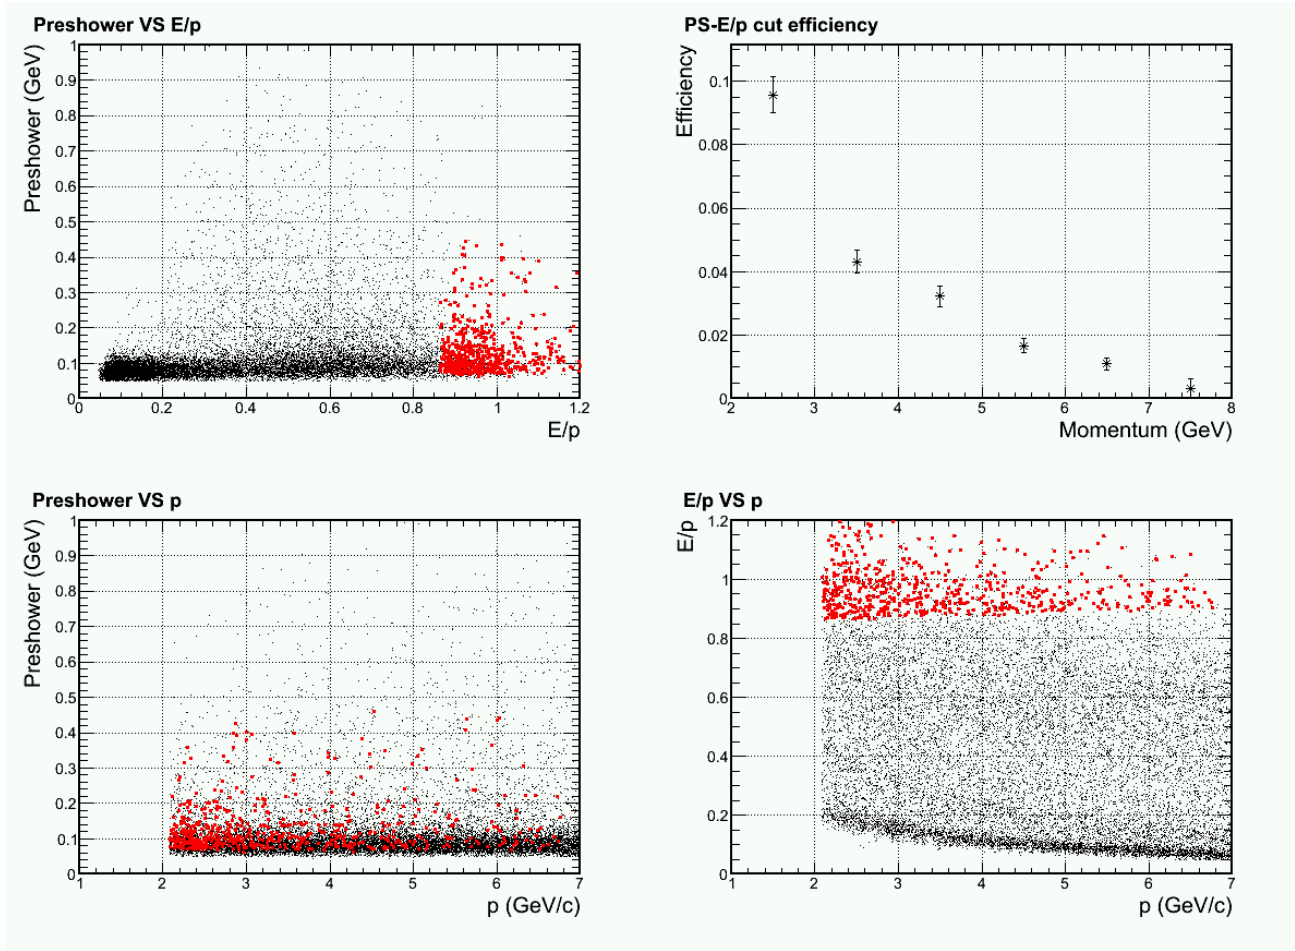

Look elsewhere, Outer/Inner R PID Performance (pion eff. w/ 94% elec. eff)



w/ photon, w/ pi+, Outer R, High Rad phi slice

w/ photon, w/ pi+, Outer R, Low Rad phi slice

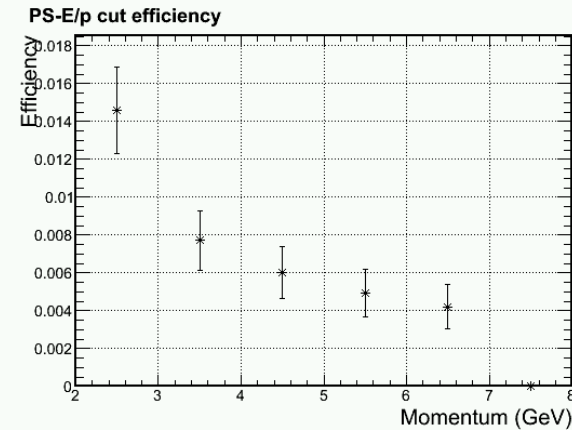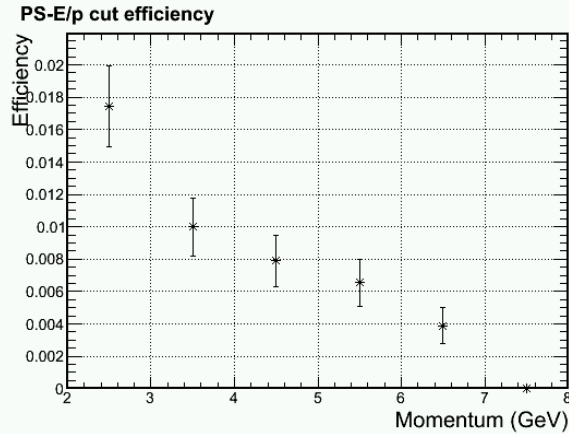

w/ o photon, w/ pi+, Inner R, High Rad phi slice





w/ o photon, w/ pi+, Inner R, Low Rad phi slice

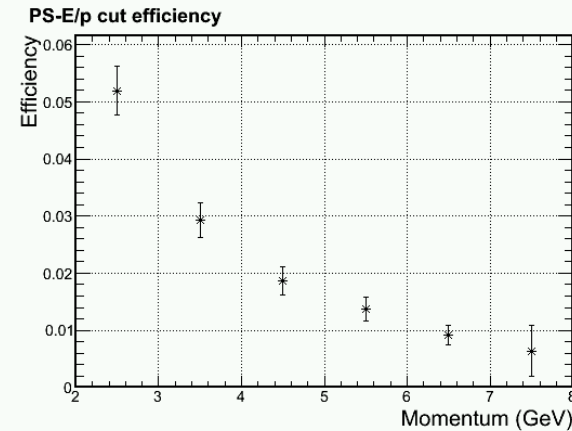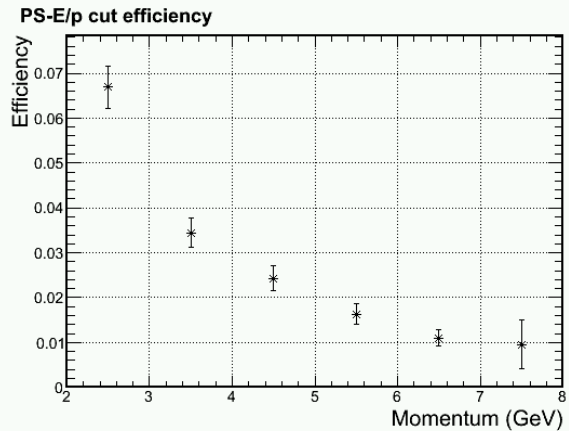

First update of CLEO background


- »» Reported Apr 23 Calorimeter Meeting

Zhiwen Updated background contribution for all configurations. PVDIS shown here:

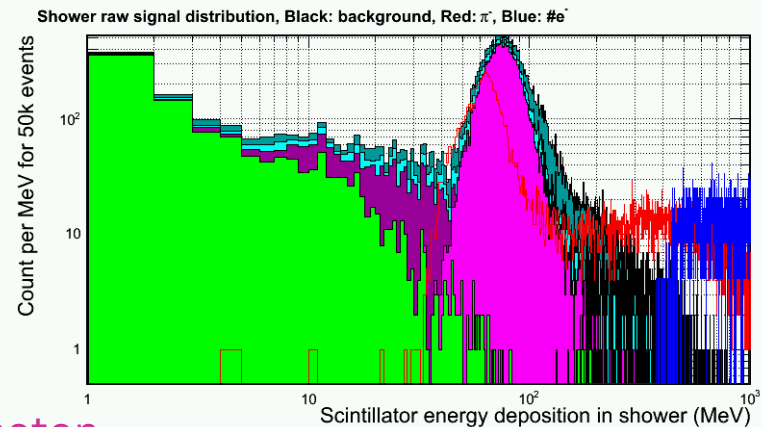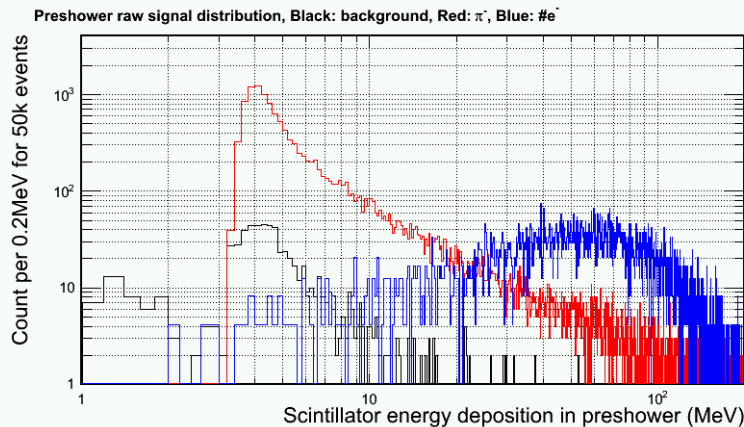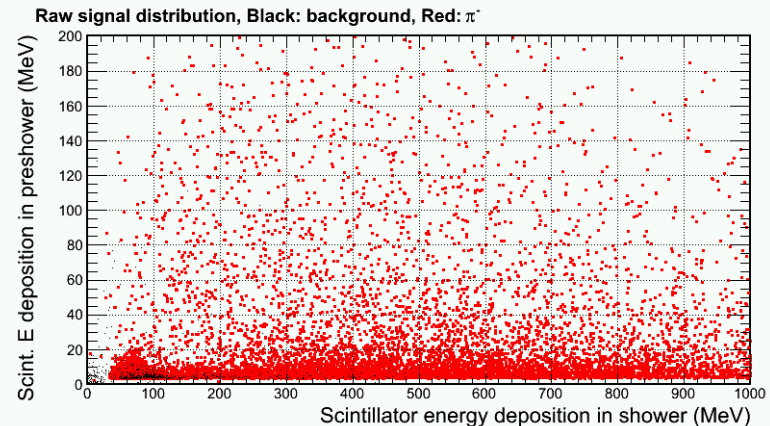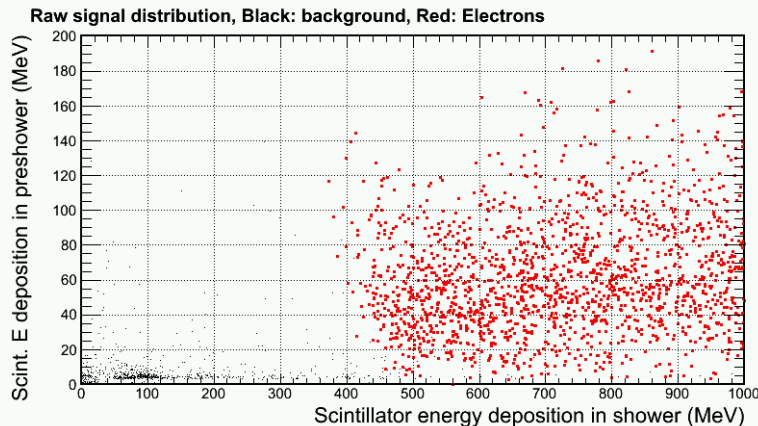


- Photon
- Electron
- Pion- Pion+

Updated: Per-event pion rate for 1+6 hexagon cluster at inner radius

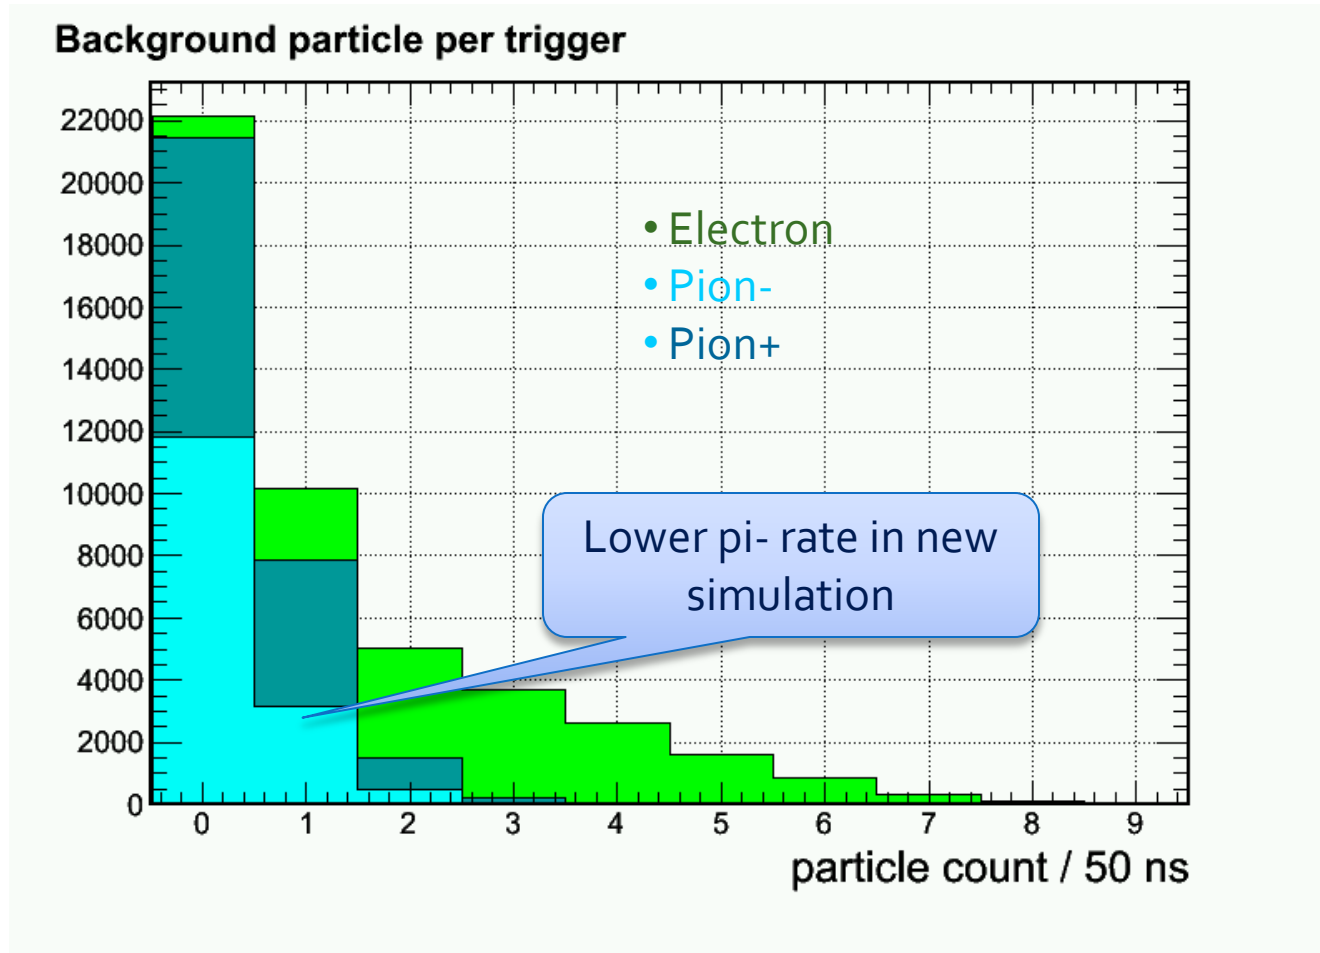


Updated: electron efficiency

Only electron and pi- background used

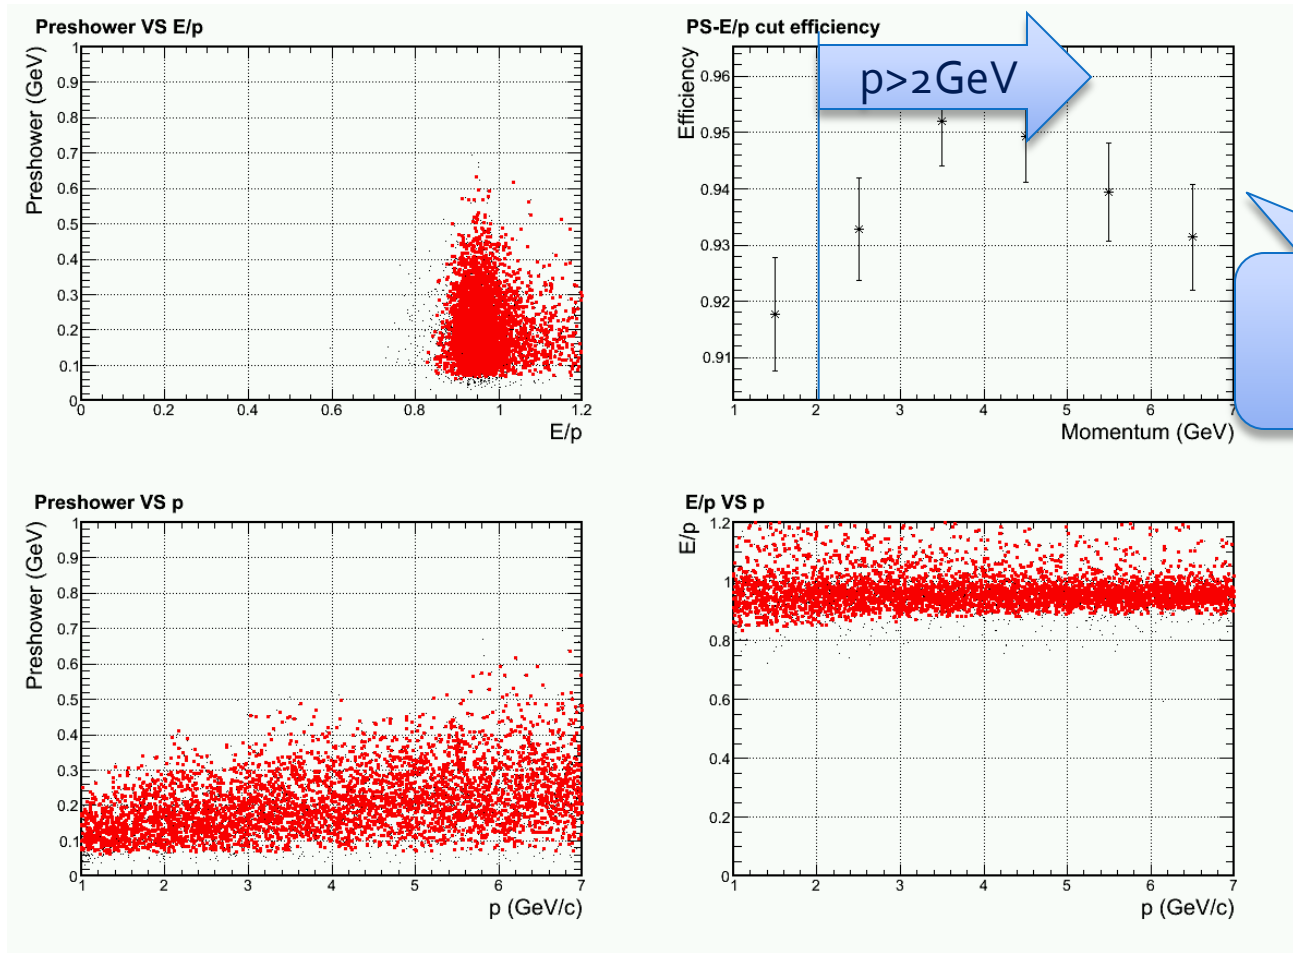


Updated: pion rejection

Only electron and pi- background used

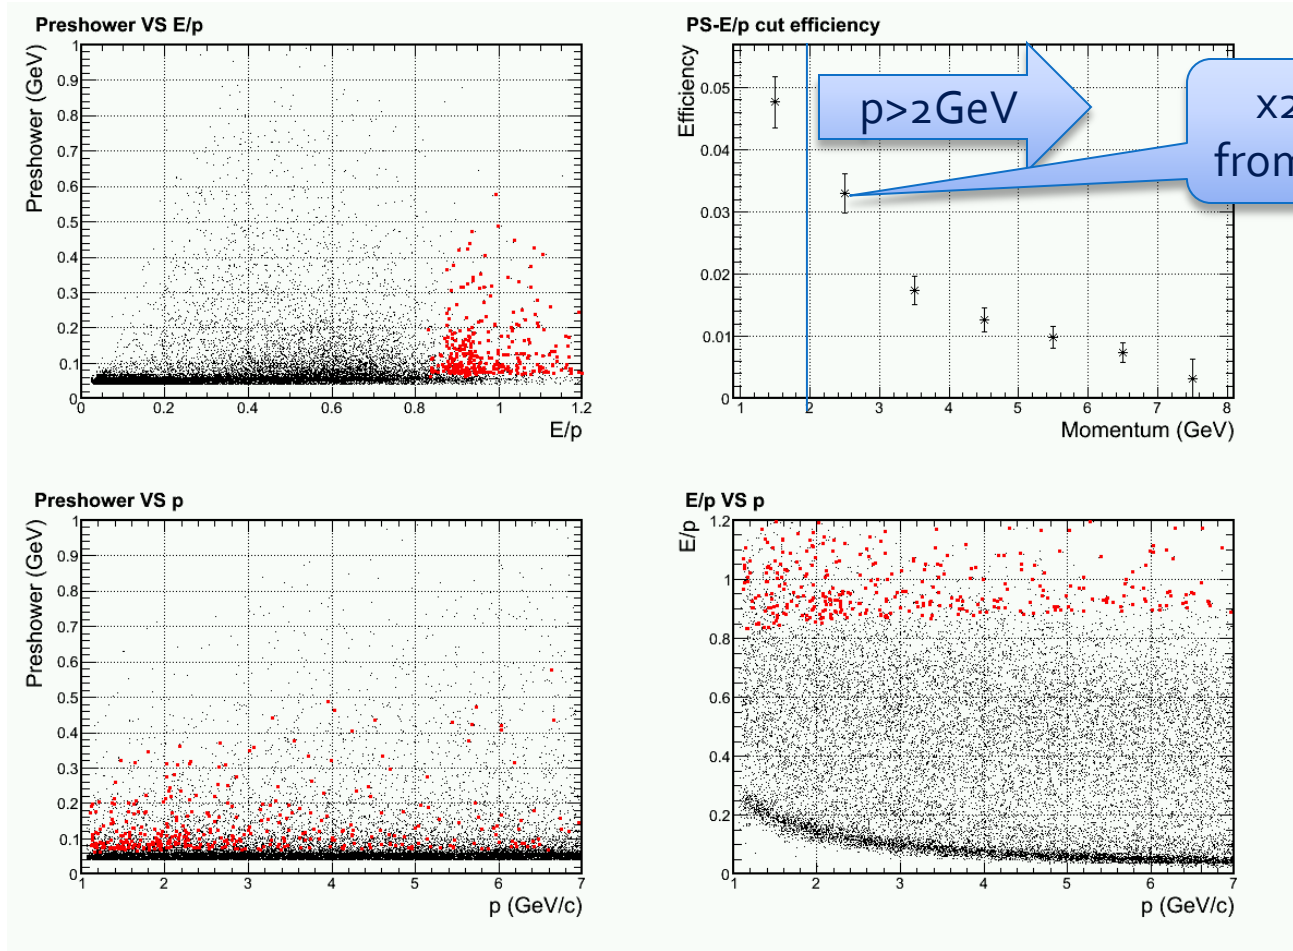


PVDIS trigger turn on curve

2GeV electron cut based on shower Hex1+6 cluster only

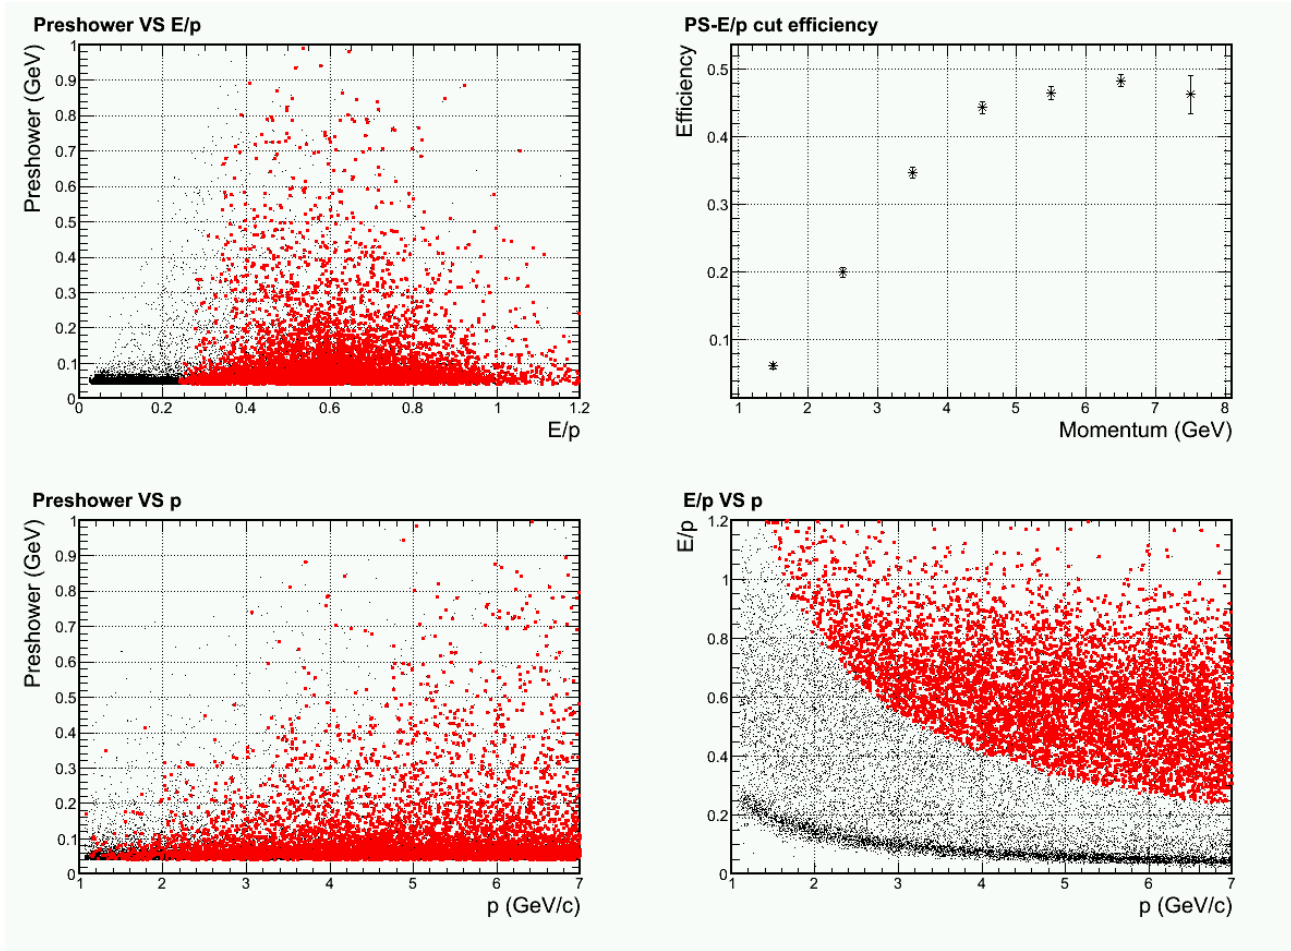

PVDIS – current baffle (with direct γ)


From Dec Collaboration Meeting

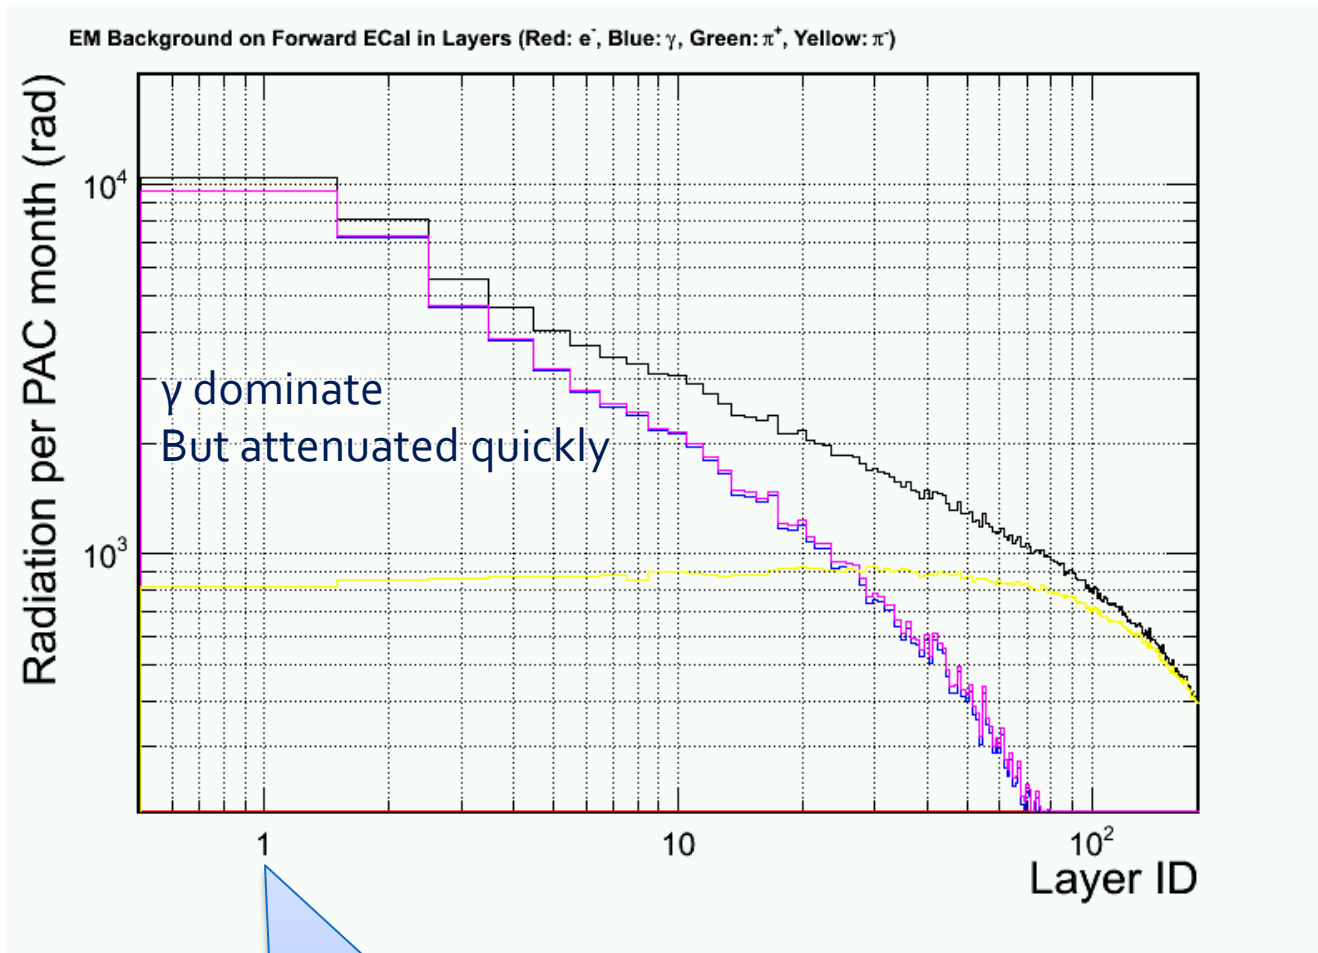

Layer #1 is 2cm
preshower scint.

PVDIS – preview for a baffle w/o direct γ

From Dec Collaboration Meeting

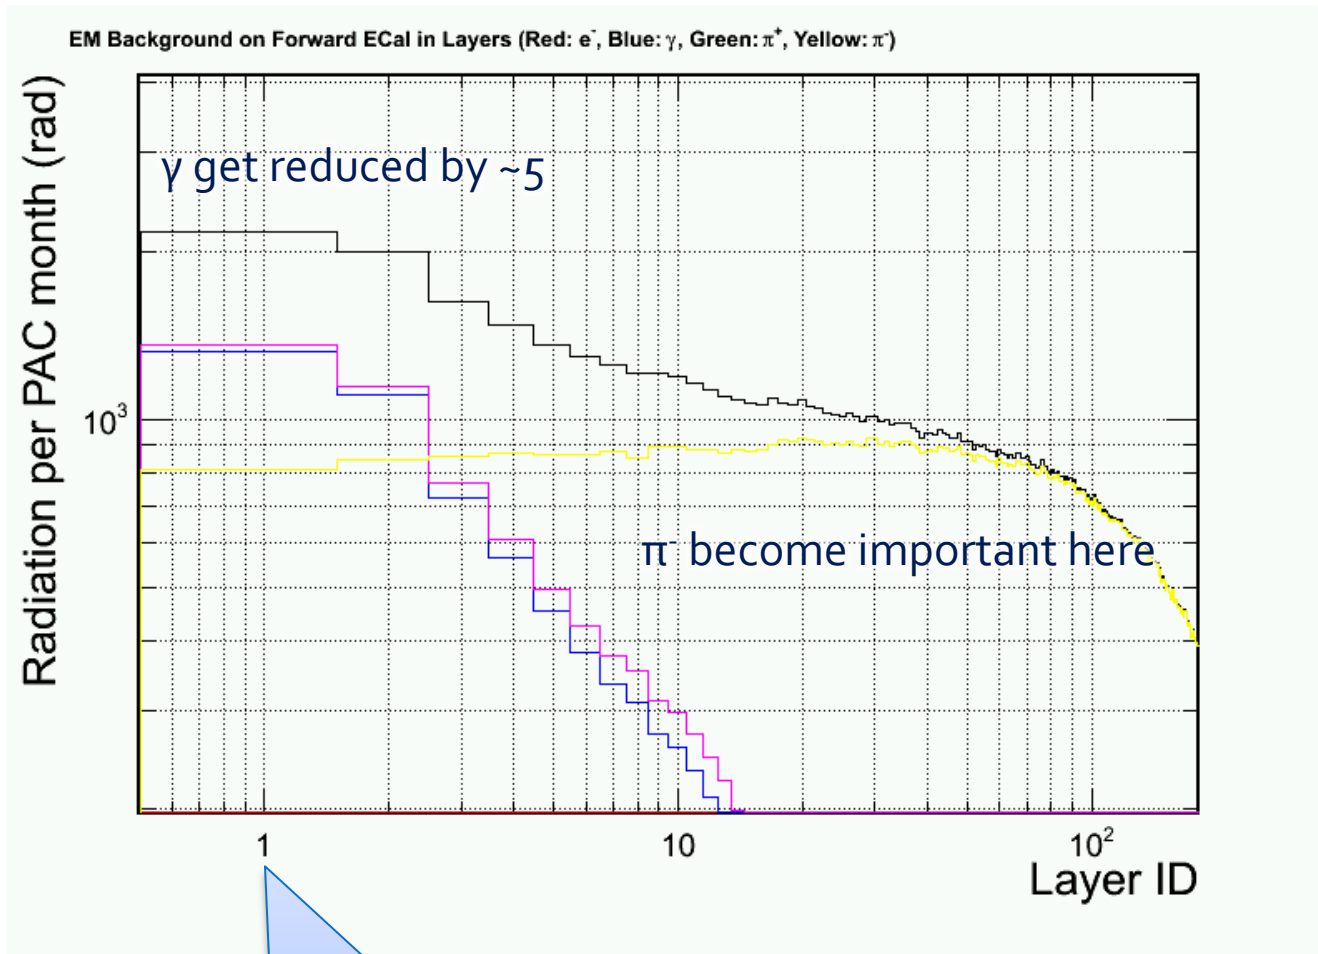


Layer #1 is 2cm
preshower scint.

Last Version of Background Simulation (reported last week)




Why it is hard – lots of deep pions


Raw signal distribution, Black: background, Red: Electrons

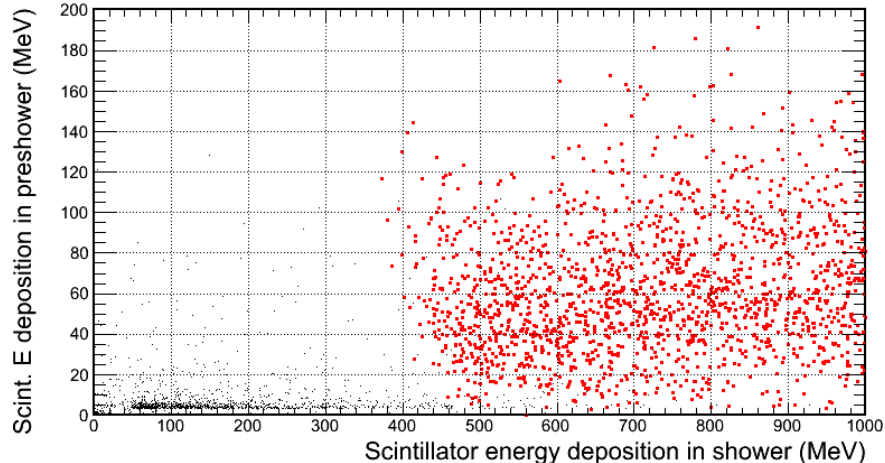


Raw signal distribution, Black: background, Red: π^-

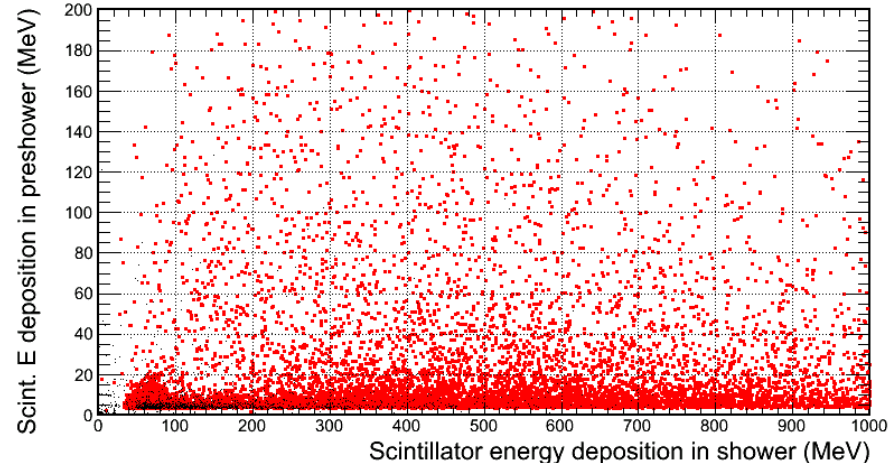

Preshower raw signal distribution, Black: background, Red: π^- , Blue: e^-

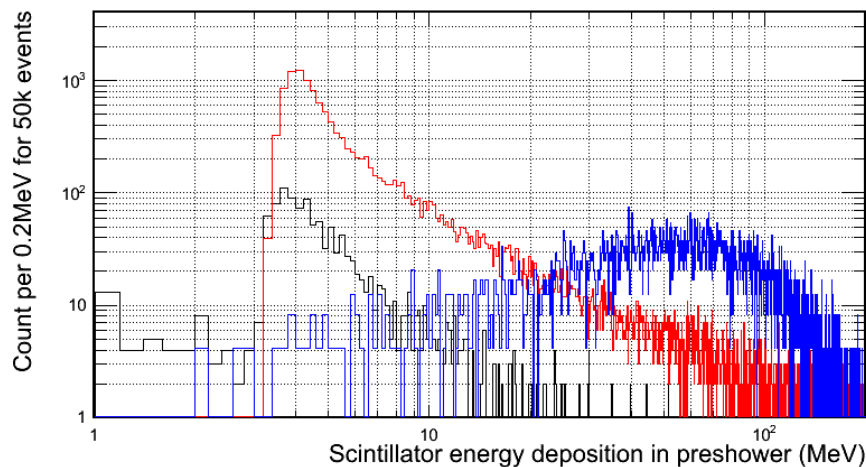


Shower raw signal distribution, Black: background, Red: π^- , Blue: e^-

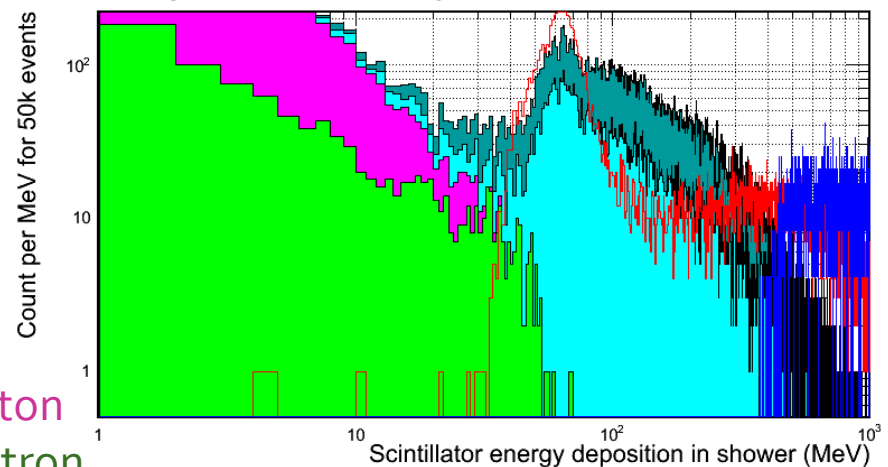





- Photon
- Electron
- Pion- Pion+

Per-event pion rate for 1+6 hexagon cluster at inner radius





Background particle per trigger

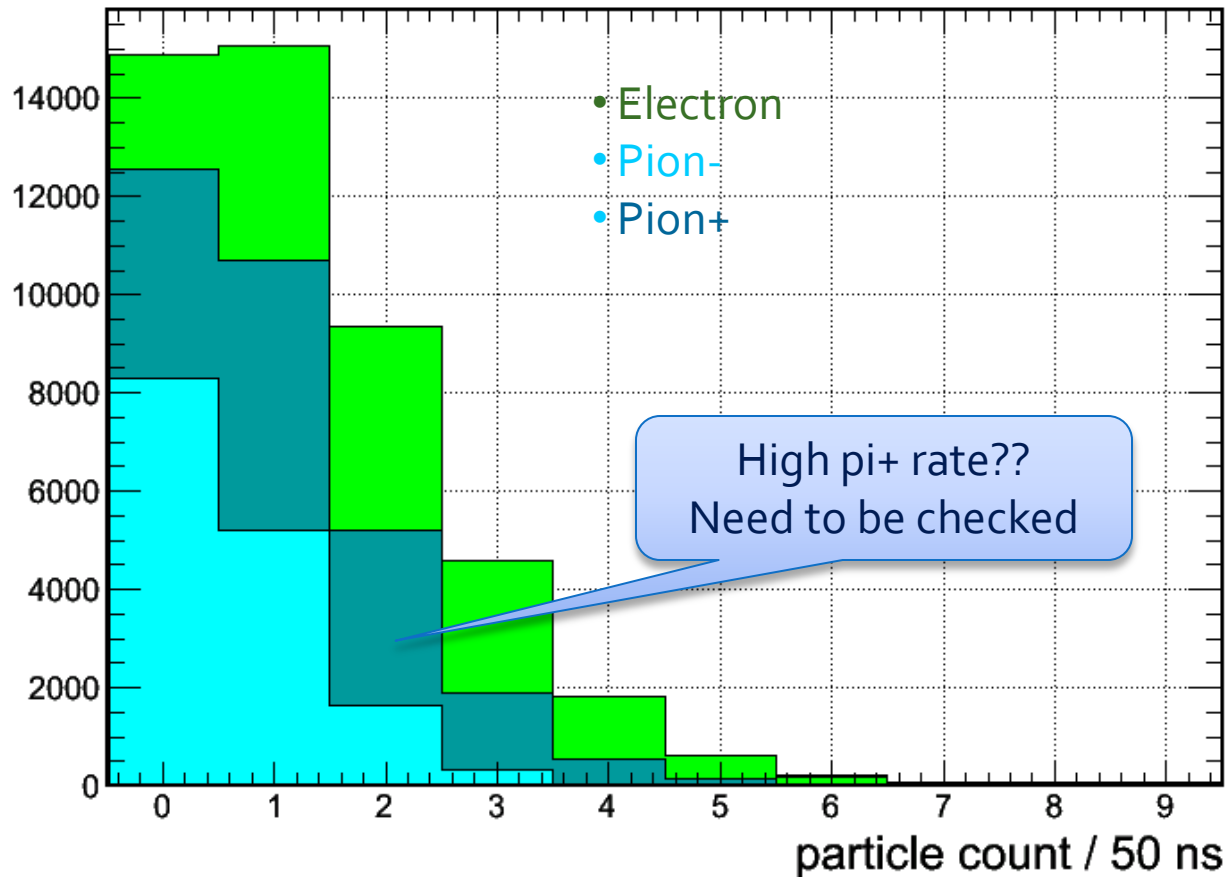

Electron efficiency w/ background at inner radius. Ignore gamma and pi+ bgd

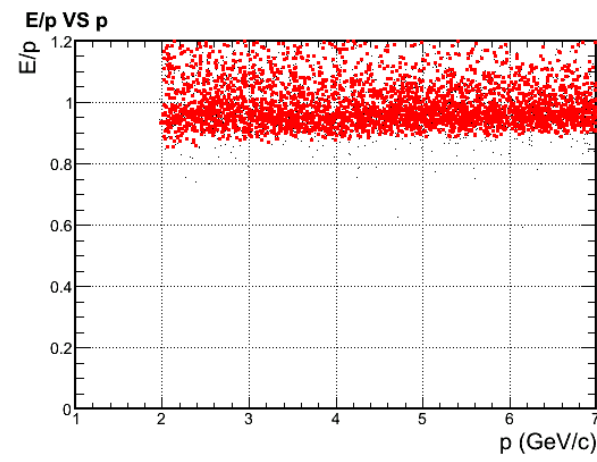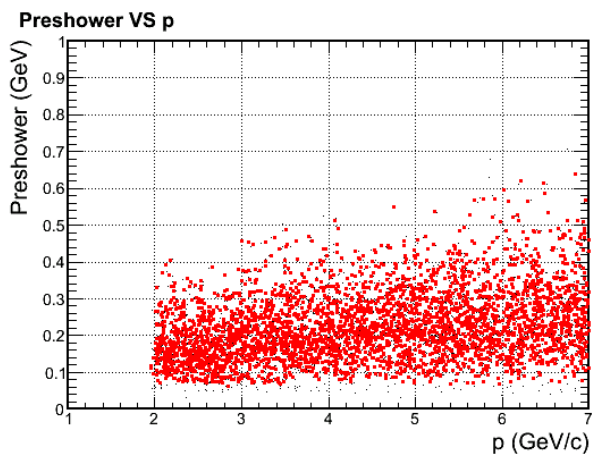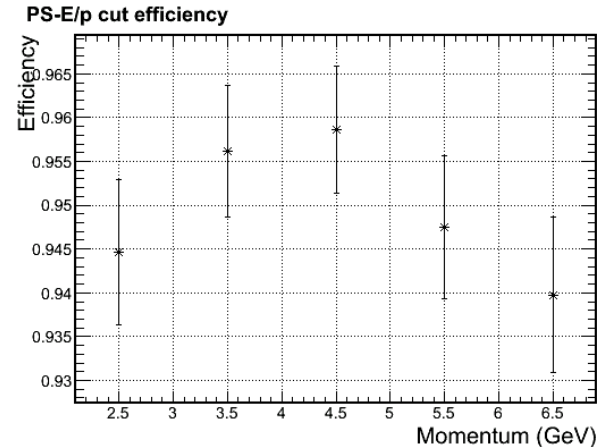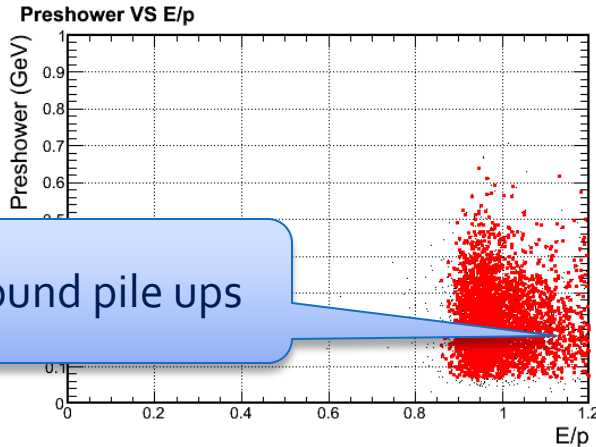

Pion efficiency w/ background at inner radius. Ignore gamma and pi+ bgd

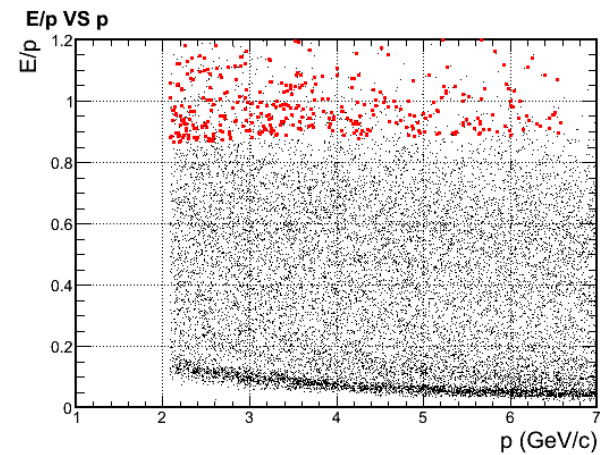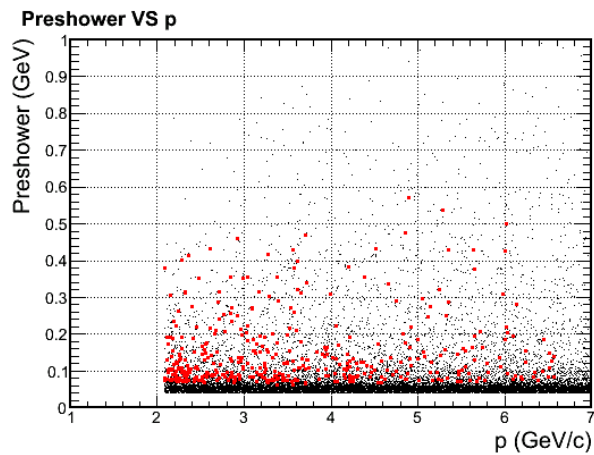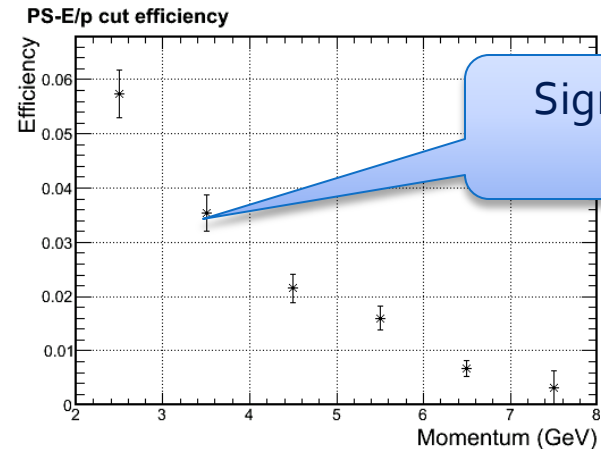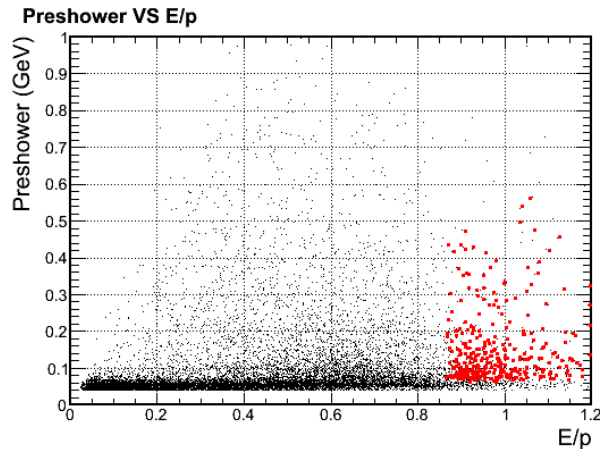

What we can further try

- ▶ Position or kinematic dependent trigger threshold and cut threshold
- ▶ Use track multiplicity to assist calorimeter cuts