


User Manual

36000 mAh IP65 Wireless Charging Solar Power Bank

Thank you for purchasing this solar power bank. Please read the manual carefully before use, and keep it for reference in the future.

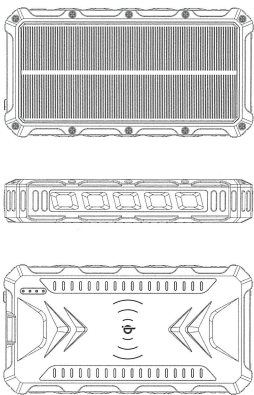

Product Features:


- Wireless Charger output : 5W Wireless Charging Transmitter
- IP65: Rainproof
- Multi-Functional LED Lights: The LED flashlight is a perfect outdoor companion. With lighting, flash and SOS lighting modes, it leads you through darkness and emergencies as lifesaver.
- Dual USB output port, 1 Type-c output port: The power bank is able to charge three devices simultaneously.
- Safe Use: Short circuit protection, over-discharging protection and over-charging protection are designed in PCB.A.

Qi Wireless Charging : Qi wireless charging standard, support all devices which built-in wireless charging function.(If your mobile phones do not support wireless charging, need to use an external wireless receiver.)

User Manual

36000 mAh IP65Wireless Charging Solar Power Bank

Thank you for purchasing this solar power bank. Please read the manual carefully before use, and keep it for reference in the future.

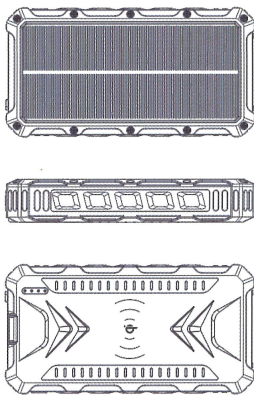

Product Features:

- Wireless Charger output : 5W Wireless Charging Transmitter
- IP65: Rainproof
- Multi-Functional LED Lights: The LED flashlight is a perfect outdoor companion. With lighting, flash and SOS lighting modes, it leads you through darkness and emergencies as lifesaver.
- Dual USB output port, 1 Type-c output port: The power bank is able to charge three devices simultaneously.
- Safe Use: Short circuit protection, over-discharging protection and over-charging protection are designed in PCB.A.

Qi Wireless Charging : Qi wireless charging standard, support all devices which built-in wireless charging function.(If your mobile phones do not support wireless charging, need to use an external wireless receiver.)


Product Features:

Capacity	36000mAh
Micro USB Input	DC 5V 2A (Max)
Type-C Input	DC 5V 3A (Max)
USB Output 1. 2	DC 5V 3A (Max)
Type-C Output	DC 5V 3A (Max)
Wireless Output	5V 1A (Max)
Solar Panel	5V 360mAh
Product size	16.75*8.65*2.85/cm
Full charging time	9~12 hours
Operation temperature	0-45 C
Battery type	Rechargeable Li-polymer battery
Flashlight	0.5 W*8

Accessory List: User Manual, Micro USB Charging Cable, Power Bank

Product Overview:

- 1.USB Output 1.2 : DC 5V 3A Max
- 2.Micro USB Input: DC 5V 2A Max
- 3.Type-C Output: DC 5V 3A Max / Input: DC 5V/3A Max
- 4.4 LED Indicators for power status
- 5.Solar charging indicator
- 6.LED Lights
- 7.Power Button
- 8.Solar Panel
- 9.Wireless charging

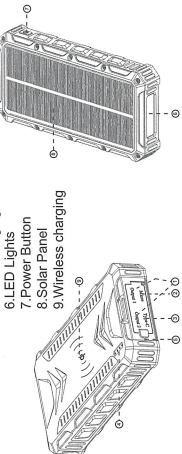


Product Features:

Capacity	36000mAh
Micro USB Input	DC 5V 2A (Max)
Type-C Input	DC 5V 3A (Max)
USB Output 1. 2	DC 5V 3A (Max)
Type-C Output	DC 5V 3A (Max)
Wireless Output	5V 1A (Max)
Solar Panel	5V 360mAh
Product size	16.75*8.65*2.85/cm
Full charging time	9~12 hours
Operation temperature	0-45 C
Battery type	Rechargeable Li-polymer battery
Flashlight	0.5 W*8

Accessory List: User Manual, Micro USB Charging Cable, Power Bank

Product Overview:


- 1.USB Output 1.2 : DC 5V 3A Max
- 2.Micro USB Input: DC 5V 2A Max
- 3.Type-C Output: DC 5V 3A Max / Input: DC 5V/3A Max
- 4.4 LED Indicators for power status
- 5.Solar charging indicator
- 6.LED Lights
- 7.Power Button
- 8.Solar Panel
- 9.Wireless charging

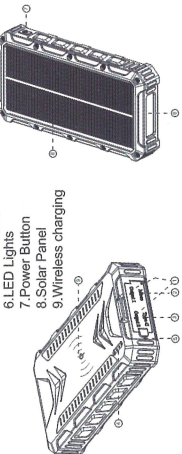

Operating Instructions:

How to Charge the Power Bank

To collect and store solar power to the Solar Charger's internal battery:

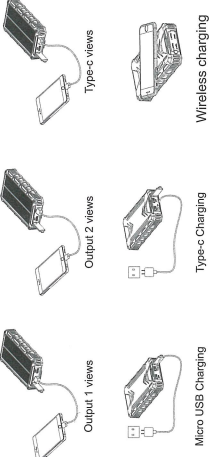

- Place the Solar Charger in direct sunlight: make sure the embedded solar panel is positioned towards the sun.
- The solar power LED indicator light glow solid green while charging by the sunlight and turns solid blue when the Solar Charger is fully charged.

Note: Kindly note that the solar panel is designed for emergency charging. It should not be the primary source of charging. Prolonged exposure under the burning sun will cause damage to the solar panel.

Note: The Blue LED will be on when under wireless charging mode.

Charging the Solar Charger from an external power source:

Micro USB Charging/Type-C charging

Connect the Power Bank to a charger with the provided USB charging cable or your own Type-C cable, then connect the charger to a power source. The Power Bank will be charged automatically. Please use a charger with output voltage between 5V~5.5V to charge. (Notice: For charging power bank, it don't support charging and discharging at the same time, Micro USB and Type-c input can't charge at the same time.

How to start wireless charging?



IMPORTANT: ↑ **After placing your phone on the power bank, press the power button to activate the battery.**

- The power bank will shut off in 35s when no device is being connected with.
- When the power bank is being charged, please don't use it to charge your device.

Solar charging

- Note:** Kindly note that the solar panel is designed for emergency charging. It should not be the primary source of charging. Prolonged exposure under the burning sun will cause damage to the solar panel.
- Place the Solar Charger in direct sunlight: make sure the embedded solar panel is positioned towards the sun.
 - The solar power LED indicator light glow solid green while charging by the sunlight and turns solid blue when the Solar Charger is fully charged.

Note:

- 1.The full charging time is only for your reference, please refer to actual operation.
- 2.High quality guarantee, using A-grade Li-polymer battery cell for this power bank , please be assured use.
- 3.Please using the matched charging cable according to your mobile phone and digital product.
- 4.It will cause slight heating due to electric consumption when charging and discharging, it's normal phenomenon.
- 5.Please store this power bank in a cool and dry place, if do not use for a long period, please fully charged this power bank at every 6 months interval.
- 6.Please find our suggestion to choosing regular 5V-2A charger to charge this solar charger, in order to ensure the stability of this product usage.
- 7.Please do not put together this power bank with metal or tool items, in order to avoid scratching surface or damage.
8. Don't leave this item out in your car to charge. Car's dashboard will become very hot from the sun and would ruining the internal battery.

WARNING:

- DO NOT attempt to open or dismantle the product.
- DO NOT subject the power bank to naked flames or extreme heat.
- DO NOT stand on or otherwise apply pressure to the power bank.
- DO NOT allow children to play with the power bank.
- Whilst the device will charge in high temperatures please ensure the device never sits in direct sunlight for a prolonged period of time as the charger has a maximum temperature of 45℃ (113 ℉).
- Stop using this power bank if it occur expansion or break down, and contact local distributor.
- Unless supervision and guided by professional man, and ensure safety of user, the following person are not suitable to use this power bank: people who degeneration on physical function of mental ability, people who lack of operating experience and lack of acknowledge of this power bank.

Charging the Solar Charger from an external power source:

Micro USB Charging/Type-C charging

Connect the Power Bank to a charger with the provided USB charging cable or your own Type-C cable, then connect the charger to a power source. The Power Bank will be charged automatically. Please use a charger with output voltage between 5V~5.5V to charge. (Notice: For charging power bank, it don't support charging and discharging at the same time, Micro USB and Type-c input can't charge at the same time.

Battery's charging status is indicated by 4 LED light indicators in the following manner:

Charging Status LED Indicators	0%~25%	25%~50%	50%~75%	75%~90%	100%
1st	Flashing Blue	●	●	●	●
2nd	OFF	Flashing Blue	●	●	●
3rd	OFF	OFF	Flashing Blue	●	●
4th	OFF	OFF	OFF	Flashing Blue	●

- Solid Blue

Note: The power bank needs to be fully charged if you wish yo utilize both USB ports and charge three devices simultaneously. 4 LED indicators will constant on after the power bank is fully charged.

Operating the LED Flashlight:

1. To turn on the Emergency LED Flashlight: Double Press the power button to turn on the LED flashlight.
2. To turn on the Caution Light: After operate step i., then press the power button once to switch the Caution Light on.
3. To turn on SOS Signal Light: After operate step ii., then press the power button once to switch the SOS Signal Light.
4. To turn off the LED Flashlight: Double press the power button once to turn off the LED Flashlight.

Note:

- 1.The full charging time is only for your reference, please refer to actual operation.
- 2.High quality guarantee, using A-grade Li-polymer battery cell for this power bank , please be assured use.
- 3.Please using the matched charging cable according to your mobile phone and digital product.
- 4.It will cause slight heating due to electric consumption when charging and discharging, it's normal phenomenon.
- 5.Please store this power bank in a cool and dry place, if do not use for a long period, please fully charged this power bank at every 6 months interval.
- 6.Please find our suggestion to choosing regular 5V-2A charger to charge this solar charger, in order to ensure the stability of this product usage.
- 7.Please do not put together this power bank with metal or tool items, in order to avoid scratching surface or damage.
8. Don't leave this item out in your car to charge. Car's dashboard will become very hot from the sun and would ruining the internal battery.

WARNING:

- DO NOT attempt to open or dismantle the product.
- DO NOT subject the power bank to naked flames or extreme heat.
- DO NOT stand on or otherwise apply pressure to the power bank.
- DO NOT allow children to play with the power bank.
- Whilst the device will charge in high temperatures please ensure the device never sits in direct sunlight for a prolonged period of time as the charger has a maximum temperature of 45℃ (113 ℉).
- Stop using this power bank if it occur expansion or break down, and contact local distributor.
- Unless supervision and guided by professional man, and ensure safety of user, the following person are not suitable to use this power bank: people who degeneration on physical function or mental ability, people who lack of operating experience and lack of acknowledge of this power bank.