
HA17324 Series

Quad Operational Amplifier

HITACHI

Description

HA17324 is quad operational amplifier that provide high gain and internal phase compensation, with single power supply. They can be widely used to control equipments.


Features

- Wide range of supply voltage, and single power supply used
- Internal phase compensation
- Wide range of common mode voltage, and possible to operate with an input about 0V


Ordering Information

Type No.	Application	Package
HA17324FP	Industrial use	FP-14DA
HA17324F	Commercial use	FP-14DA
HA17324	Commercial use	DP-14
HA17324P	Industrial use	DP-14

Pin Arrangement

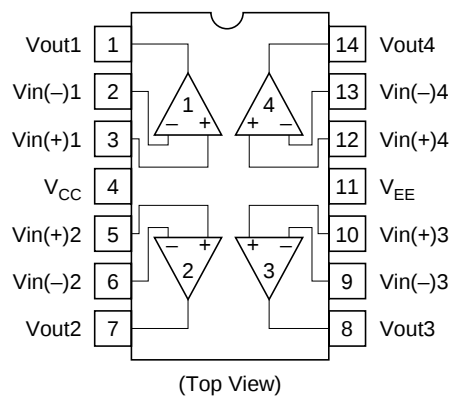

Circuit Schematic (1/4)

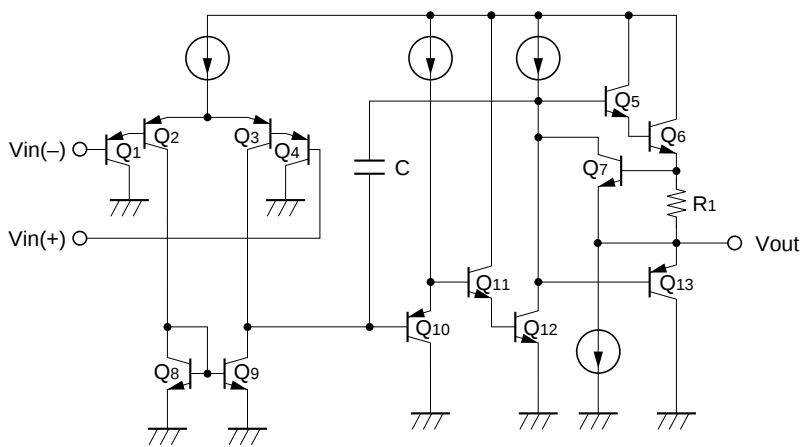

Absolute Maximum Ratings (Ta = 25°C)







Item	Symbol	Rating	Unit
Supply voltage	V _{CC}	32	V
Sink current	I _{sink}	50	mA
Power dissipation	P _T	625*	mW
Common mode input voltage	V _{CM}	−0.3 to V _{CC}	V
Differential input voltage	V _{in} (diff)	±V _{CC}	V
Operating temperature	T _{opr}	−20 to +75	°C
Storage temperature	T _{stg}	−55 to +125	°C



Note: These are allowable values up to Ta=50°C.
Derate by 8.3mW/°C above that temperature.
In case of SOP, see notes on SOP Package Usage in Reliability section.

Electrical Characteristics (V_{CC} = +15V, Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Input offset voltage	V _{IO}	—	2	7	mV	V _{CM} = 7.5V, R _S = 50Ω, R _f = 50kΩ
Input offset current	I _{IO}	—	5	50	nA	V _{CM} = 7.5V, I _{IO} = I _{I(-)} - I _{I(+)}
Input bias current	I _{IB}	—	30	500	nA	V _{CM} = 7.5V
Power source rejection ratio	PSRR	—	93	—	dB	f = 100Hz, R _S = 1kΩ, R _j = 100kΩ
Voltage gain	A _{VD}	75	90	—	dB	R _S = 1 kΩ, R _f = 100kΩ, R _L = ∞
Common mode rejection ratio	CMR	—	80	—	dB	R _S = 50Ω, R _f = 5kΩ
Common mode input voltage range	V _{CM}	-0.3	—	13.5	V	R _S = 1kΩ, R _f = 100kΩ, f = 100Hz
Maximum output voltage	V _{op-p}	—	13.6	—	V	f = 100Hz, R _S = 1kΩ, R _f = 100kΩ, R _L = 20kΩ
Output source current	I _{osource}	20	40	—	mA	V _{IN} ⁺ = 1V, V _{IN} ⁻ = 0V, V _{OH} = 10V
Output sink current	I _{osink}	10	20	—	mA	V _{IN} = 0V, V _{IN} = 1V, V _{OL} = 2.5V
Supply current	I _{CC}	—	0.8	2	mA	V _{IN} = GND, R _L = ∞
Slew rate	SR	—	0.19	—	V/μs	f = 1.5kHz, V _{CM} = 7.5V, R _L = ∞
Channel separation	CS	—	120	—	dB	f = 1kHz
Output sink current	I _{osink}	15	50	—	μA	V _{IN} ⁺ = 0V, V _{IN} ⁻ = 1V, V _{OL} = 200mV
	I _{osink}	3	9	—	mA	V _{IN} ⁺ = 0V, V _{IN} ⁻ = 1V, V _{OL} = 1V
Output voltage	V _{OH}	13.2	13.6	—	V	I _{OH} = -1mA
	V _{OH}	12.0	13.3	—	V	I _{OH} = -10mA
Output voltage	V _{OL}	—	0.8	1.0	V	I _{OL} = 1mA
	V _{OL}	—	1.1	1.8	V	I _{OL} = 10mA


Characteristic Curves

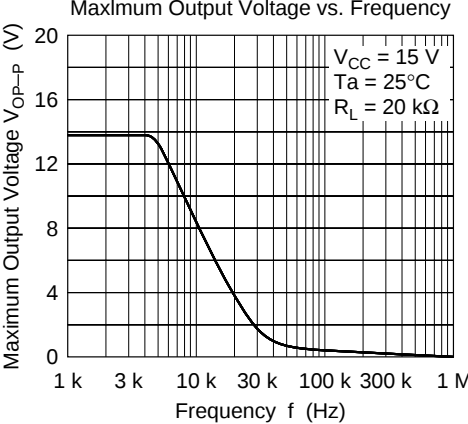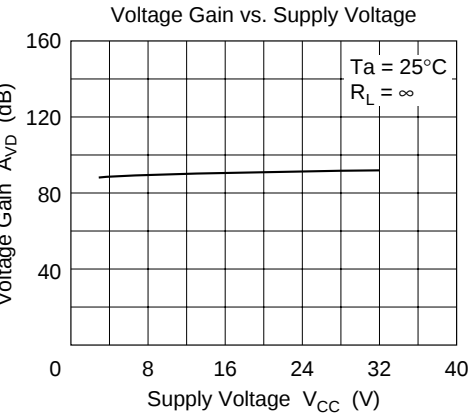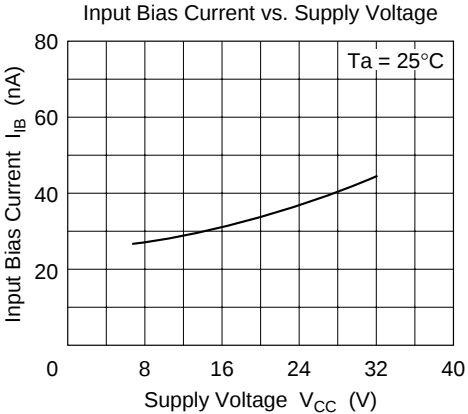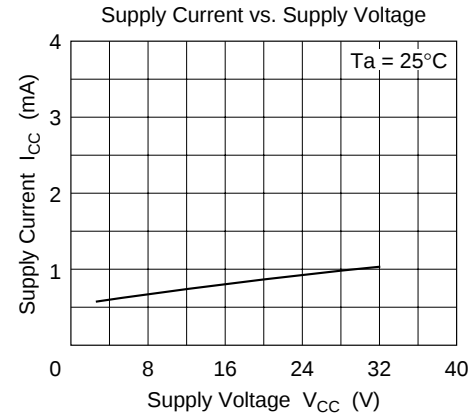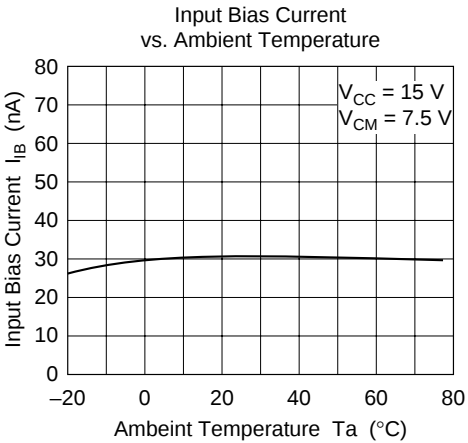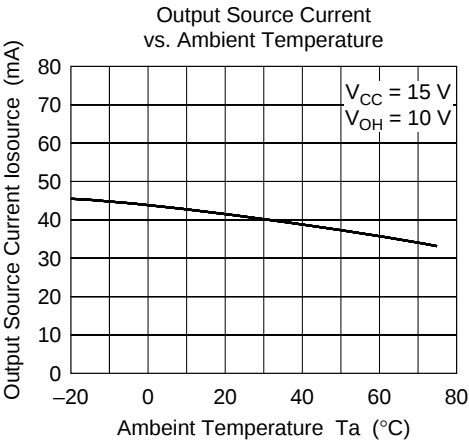

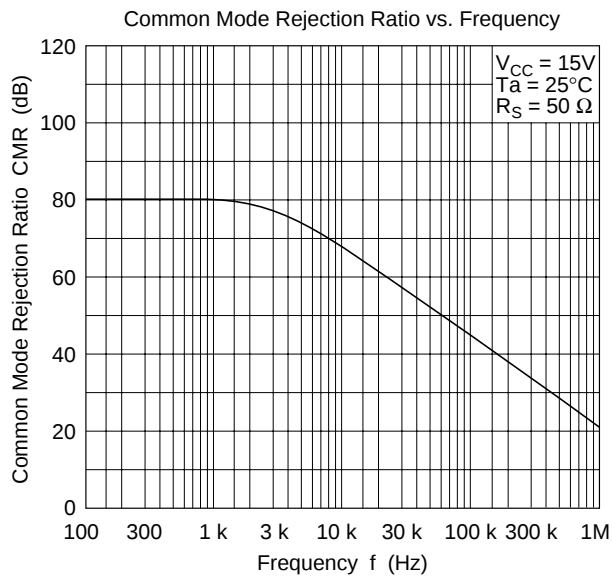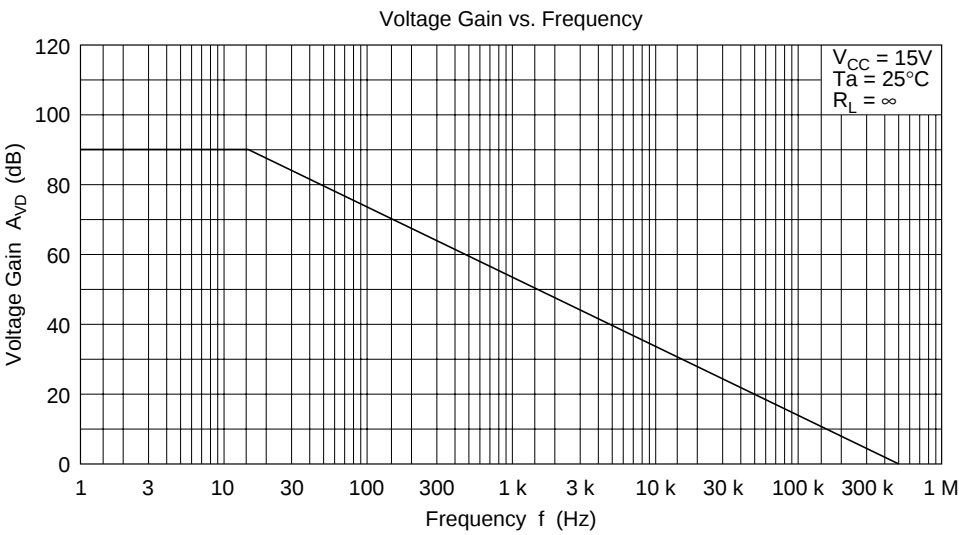


Package Dimensions

Unit: mm

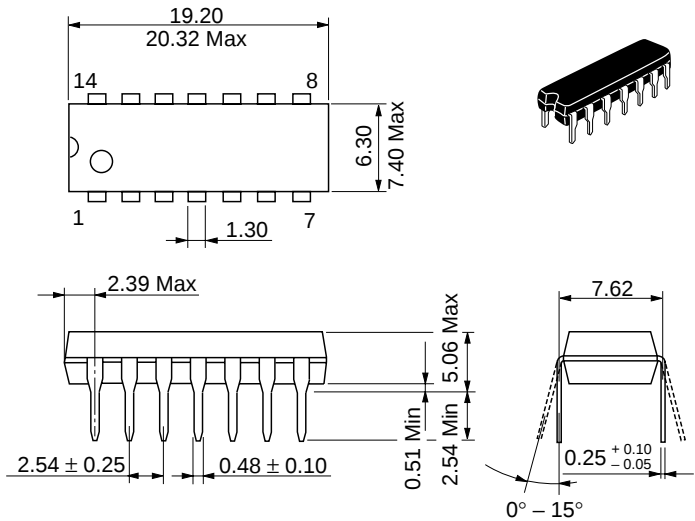

Hitachi Code	DP-14
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	0.97 g

Unit: mm

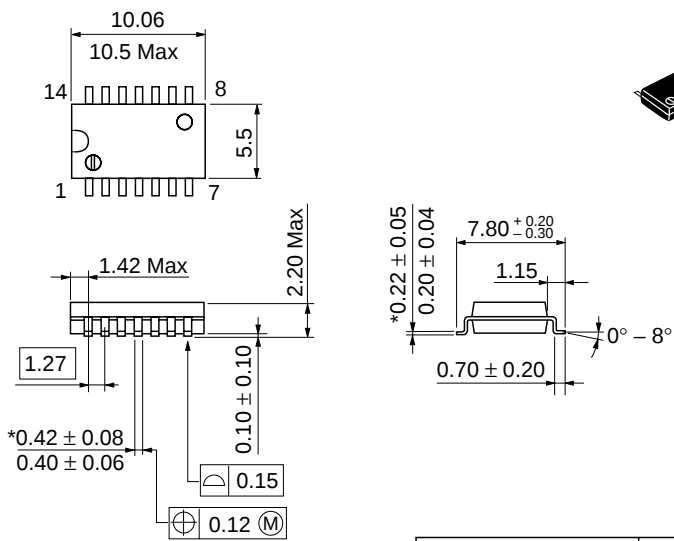

*Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-14DA
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.23 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
 5. This product is not designed to be radiation resistant.
 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohite-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica : <http://semiconductor.hitachi.com/>
 Europe : <http://www.hitachi-eu.com/hel/ecg>
 Asia (Singapore) : <http://www.has.hitachi.com.sg/grp3/sicd/index.htm>
 Asia (Taiwan) : http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
 Asia (HongKong) : <http://www.hitachi.com.hk/eng/bo/grp3/index.htm>
 Japan : <http://www.hitachi.co.jp/Sicd/indx.htm>

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher StraÙe 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322	Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533 Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building, No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180	Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX
--	---	--	--

Copyright ' Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.