

Date: 11.04.2005  
AN-Number: AN2004-04

Page 1  
Department: SM PHP

## Case non rupture current High power Semiconductors

DIN IEC 60 747 – 2 (Diodes) and DIN IEC 747 – 6 (Thyristors)

The case non rupture current is the current value by which the housing neither breaks nor opens in such a way that explosive plasma can come out. We find the lowest value of case non rupture current if the destruction can be found as a small spot at the edge of the semiconductor, outside the contacted area, and if high surge currents flow in reverse direction.

### 1) Preparation of test devices:

First the semiconductor pellet is damaged mechanically at its edge in reverse direction. Most of the high current test equipments work at a relatively low voltage, therefore a possible rest of reverse blocking capability has to be eliminated, e.g. by capacitor discharge.


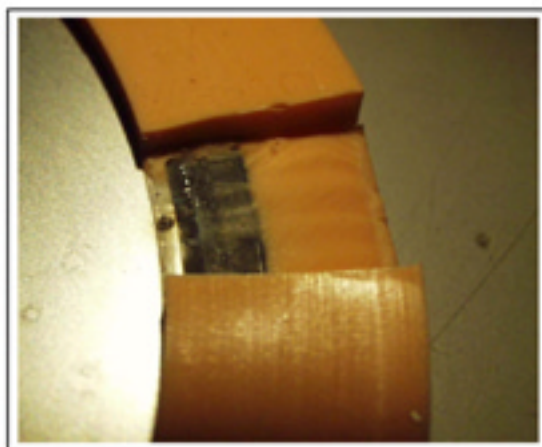


Fig. 1 Typical Destruction

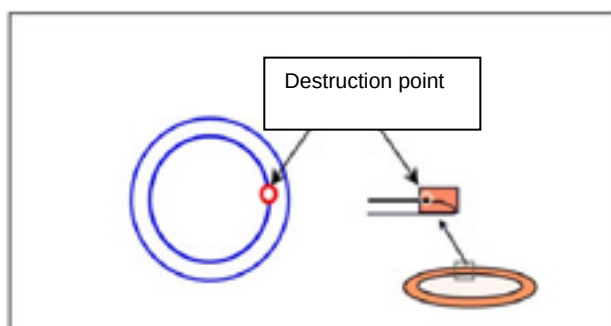

With thyristors, an aimed installation of the destruction point exactly where the gate lead comes out is realized.

## 2) Current demand:

Because of better comparability most data indications are based on half sine waves of 10 ms pulse duration. The  $I^2t$  values derived from these pulses can be transferred to 60 Hz cycles, too. In many applications, however, essentially differing demands arise, requiring an individual consideration and special tests.

### 2.1 High current converter

For applications with high, continuous load current, e.g. electrolysis, aluminium melts, etc., the construction usually consists of approximately 6 MW blocks, in which up to 14 semiconductors per arm are connected in parallel. Because of the relatively low voltage, series connections are not necessary.

These units normally cannot be switched off in case of defects of the individual semiconductors, because this would mean danger to the equipment or to the product being manufactured. The aluminium pots, for example, can freeze, this would mean they would become useless. Defect semiconductors therefore by fuses are separated from the circuit. Until these fuses have switched off, the housing may neither break, nor may explosive plasma be emitted.

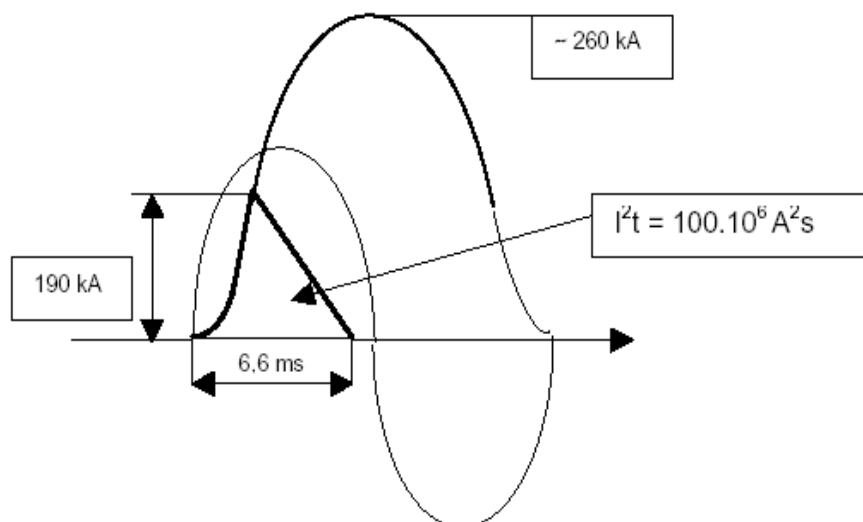


Fig. 2 Typical semiconductor load at fuse switching.

### 2.2 Drives

For current source inverter line bridges and power controllers in static direct inverters one can observe a trend towards fuse-less design. This means in forward direction the definition of surge currents (in accordance to Fig.3), followed by negative and/or positive (thyristors) blocking voltage. If the short circuit is detected in time, it is possible to operate with a gate barrier after one half wave in case of thyristors. Alternatively 3 half waves followed by negative blocking voltage till the main circuit breaker turns off. While trying to use cheaper (=slower) circuit breakers, the interest in 5 half current waves is increasing.

The requirements concerning the case non rupture current are the same than in forward direction.

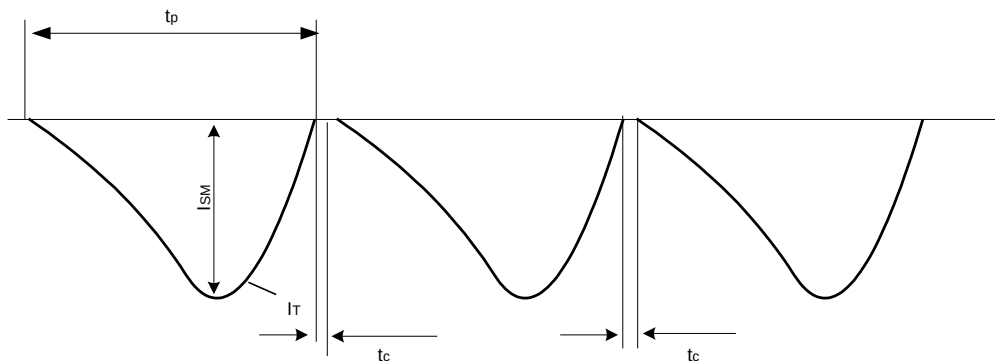


Fig. 3 Typical current load at multiple pulses

## 2.3) HVDC, SVCs

The requirements are similar to those of drive technologies. There are differences in pulse durations and after 3 half waves, the system is switched off. Because of the high number of the elements connected in series and a redundant  $n+2$  design, the case non rupture current in these applications is not of such a high importance as it is in high current converters and drives.

## 3) Protective measures

### 3.1) Ceramics - Protection against burst.

It is well known that in case of local heating, as it is caused by a plasma beam, ceramic parts are affected negatively by traction forces resulting from the high internal pressure. To protect the ceramic ring, Teflon parts are inserted, which take over the heat in the first moment and divert the plasma beam.

### 3.2) Flanges - protection against opening of the housing

eupec relies on means which prevent the housing from opening, while the competition tries to divert the plasma coming out by plastic rings attached at the outside. Fig. 4 shows the cross section of a modern eupec thyristor for propulsion technologies.

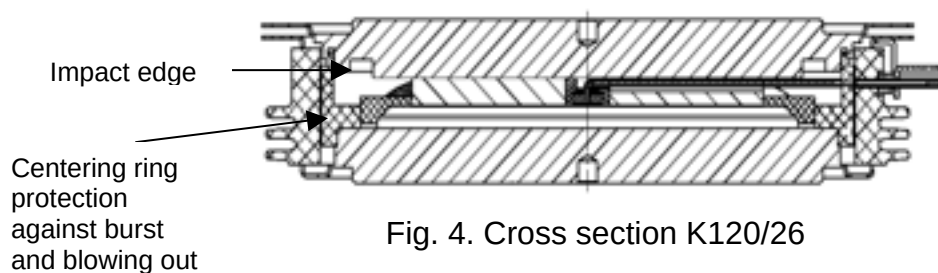


Fig. 4. Cross section K120/26

For high current converters, using increasingly thyristors with 100mm pellets, this protection may possibly not be sufficient. For this reason eupec developed a special housing, which at present is used for the types T4301N and T3401N.

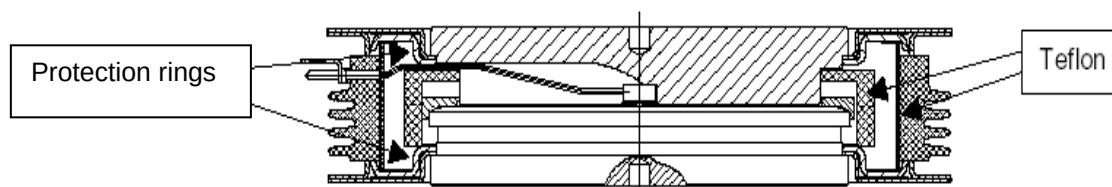


Fig. 5 Cross section K150/35

Tests at the ABB high voltage test laboratory confirmed the suitability of this housing for the demand shown in fig. 1.

## 4) Case non rupture currents

| Diodes                      | flange | height | contact | kind of diodes        | pellet | $I_{RSMC}$ [A]<br>$T_{vj} = 25^{\circ}\text{C}$ ,<br>$T_p = 10\text{ms}$ ,<br>Sine half wave | $I_{RSMC}$ [A]<br>$T_{vj} = 25^{\circ}\text{C}$ ,<br>$T_p = 10\text{ms}$ ,<br>3 sine half waves | $I_{RSMC}$ [A]<br>$T_{vj} = 25^{\circ}\text{C}$ ,<br>$T_p = 10\text{ms}$ ,<br>5 sine half waves |
|-----------------------------|--------|--------|---------|-----------------------|--------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Typ                         | mm     | mm     | mm      |                       | mm     | A                                                                                            | A                                                                                               | A                                                                                               |
| D471N / D711N               | 54     | 26     | 34      | rectifire             | 38     | <b>14.000</b>                                                                                |                                                                                                 |                                                                                                 |
| D1481N                      | 76     | 26     | 48      | rectifire             | 55     | <b>40.000</b>                                                                                |                                                                                                 |                                                                                                 |
| D2601N / D3041N             | 120    | 26     | 86      | rectifire             | 76     | <b>105.000</b>                                                                               |                                                                                                 | <b>41.000</b>                                                                                   |
| D2601NH                     | 120    | 26     | 86      | Pulsed Power          | 76     | <b>105.000</b>                                                                               |                                                                                                 | <b>41.000</b>                                                                                   |
| D3001N / D3501N / D4201N    | 120    | 35     | 86      | rectifire             | 76     | <b>105.000</b>                                                                               |                                                                                                 | <b>41.000</b>                                                                                   |
| D6001N                      | 150    | 26     | 100     | rectifire             | 101    |                                                                                              |                                                                                                 |                                                                                                 |
| D911SH / D931SH / D1031SH   | 100    | 26     | 62,8    | free - wheeling diode | 65     | <b>42.000</b>                                                                                |                                                                                                 |                                                                                                 |
| D1121SH / D1131SH / D1331SH | 120    | 26     | 86      | free - wheeling diode | 76     | <b>105.000</b>                                                                               |                                                                                                 | <b>41.000</b>                                                                                   |
| D1951SH                     | 150    | 26     | 100     | free - wheeling diode | 101    |                                                                                              |                                                                                                 |                                                                                                 |

| Thyristors                          | flange | height | contact | pellet | $I_{RSMC}$<br>$T_{vj} = 25^{\circ}C$ ,<br>$t_p = 10ms$ ,<br>Sine half wave | $I_{RSMC} [A]$<br>$T_{vj} = 25^{\circ}C$ ,<br>$T_p = 10ms$ ,<br>3 sine half waves | $I_{RSMC}$<br>$T_{vj} = 25^{\circ}C$ ,<br>$t_p = 10ms$ ,<br>5 sine half waves | $I_{2t}$<br>$T_{vj} = 25^{\circ}C$ ,<br>fuses up to 6500A /<br>1000V |
|-------------------------------------|--------|--------|---------|--------|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Type                                | mm     | mm     | mm      | mm     | A                                                                          | A                                                                                 | A                                                                             | A2s                                                                  |
| T201N                               | 54     | 26     | 34      | 38     | <b>14.000</b>                                                              |                                                                                   |                                                                               |                                                                      |
| T501N / T731N / T901N               | 76     | 26     | 48      | 55     | <b>40.000</b>                                                              |                                                                                   |                                                                               |                                                                      |
| T551N                               | 76     | 35     | 48      | 55     | <b>40.000</b>                                                              |                                                                                   |                                                                               |                                                                      |
| T1081N / T1551N<br>T1971N / T20011N | 120    | 26     | 86      | 77     | <b>85.000</b>                                                              | <b>55.000</b>                                                                     | <b>38.000</b>                                                                 |                                                                      |
| T1201N / T1401N<br>T1451N / T1601N  | 120    | 35     | 86      | 77     | <b>85.000</b>                                                              | <b>55.000</b>                                                                     | <b>38.000</b>                                                                 |                                                                      |
| T1851N / T2351N                     | 120    | 26     | 86      | 88     | <b>75.000</b>                                                              |                                                                                   | <b>33.500</b>                                                                 |                                                                      |
| T1651N / T2161N                     | 120    | 35     | 86      | 88     | <b>75.000</b>                                                              |                                                                                   | <b>33.500</b>                                                                 |                                                                      |
| T2251N / T3441N<br>T3801N / T4771N  | 150    | 26     | 100     | 101    | <b>80.000</b>                                                              |                                                                                   | <b>35.800</b>                                                                 |                                                                      |
| T3401N / T4301N                     | 150    | 35     | 100     | 101    |                                                                            |                                                                                   |                                                                               | <b>100.000.000</b>                                                   |
| T1901N / T2851N<br>T2401N / T3101N  | 150    | 35     | 100     | 101    | <b>70.000</b>                                                              |                                                                                   | <b>36.000</b>                                                                 |                                                                      |
| T1503N                              | 150    | 40     | 100     | 101    |                                                                            |                                                                                   |                                                                               |                                                                      |
| T2871N                              | 172    | 35     | 115     | 119    | <b>65.000</b>                                                              |                                                                                   | <b>29.000</b>                                                                 |                                                                      |
| T2563N / T4003N                     | 172    | 40     | 115     | 119    | <b>65.000</b>                                                              |                                                                                   |                                                                               |                                                                      |



## Terms & Conditions of usage

The product data contained in this application note are exclusively intended for technically trained staff. You and your technical departments will have to evaluate the suitability of the product with respect to the intended application.

The product data are describing the specifications of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications.

Should you require product information in excess of the data given in this application note or which concerns the specific application of our product, please contact the sales office, which is responsible for you. Additional data are contained in the product data sheets.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in health or life endangering or life support applications, please notify. Please note, that for any such applications we urgently recommend

- to perform joint Risk and Quality Assessments;
- the conclusion of Quality Agreements;
- to establish joint measures of an ongoing product survey,  
and that we may make delivery depended on the realization of any such measures.

If and to the extent necessary, please forward equivalent notices to your customers.

Changes of this application note are reserved.