



MIC6251/6252

IttyBitty™ Instrumentation Amplifiers

Advance Information

General Description

The MIC6251 and MIC6252 are IttyBitty™ instrumentation amplifiers for use as follows:

MIC6251	+2, +1, -1 gain amplifier
MIC6252	+0.5, +1 gain amplifier; average value amplifier

The MIC6251 and MIC6252 instrumentation amplifiers operate from 4V to 32V. Both can use a single or differential (split) supply. These amplifiers feature internal, well-matched, gain setting resistors and an input common-mode range that includes the negative supply (ground).

The MIC6251/2 is available in the tiny SOT-23-5 surface mount package.

Features

- 4V to 32V operation
- Small footprint package
- Internally compensated
- 2MHz bandwidth
- 6V/ μ s typical slew rate
- Short circuit protected


Applications

- Analog blocks
- Summing amplifier
- Gain block


Ordering Information

Part Number	Marking	Temperature	Range Package
MIC6251BM5	A51	-40°C to +85°C	SOT-23-5
MIC6252BM5	A52	-40°C to +85°C	SOT-23-5

Functional Configuration

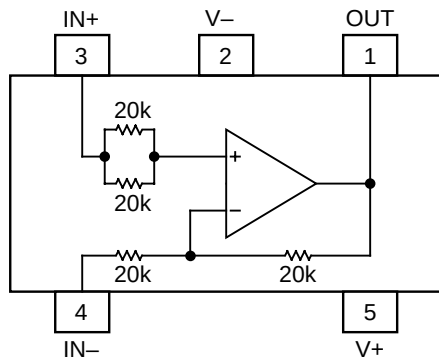


MIC6251

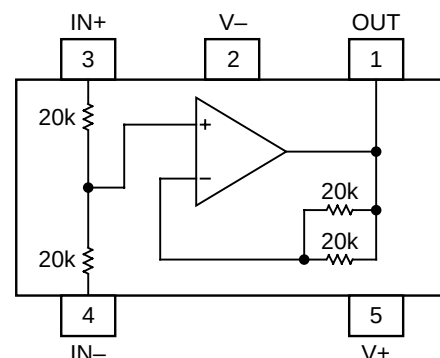

MIC6252

Pin Configuration

Part Number	Identification
MIC6251BM5	A51
MIC6252BM5	A52

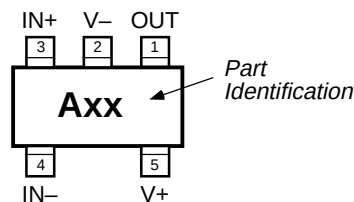

SOT-23-5 (M5)

Pin Description

Pin Number	Pin Name	Pin Function
1	OUT	Amplifier Output
2	V ₋	Negative Supply: Negative supply for split supply application or ground for single supply application.
3	IN+	Noninverting Input: See “Electrical Characteristics: Note 1. ”
4	IN-	Inverting Input: See “Electrical Characteristics: Note 1. ”
5	V+	Positive Supply

Absolute Maximum Ratings

Supply Voltage ($V_{V+} - V_{V-}$) 36V or $\pm 18V$
 Differential Input Voltage ($V_{IN+} - V_{IN-}$) $\pm 36V$
 Input Voltage (V_{IN+}, V_{IN-}) $V_{V-} - 0.3V$ to V_{V+}
 Output Short Circuit Current Duration ∞

Operating Ratings

Supply Voltage 4V to 32V
 Ambient Temperature Range $-40^{\circ}C$ to $+85^{\circ}C$
 SOT-23-5 Thermal Resistance (θ_{JA}) $220^{\circ}C/W$

Electrical Characteristics (Differential Supply)

$V_{V+} = +15V$, $V_{V-} = -15V$; $V_{CM} = 0V$, **Note 1**; $T_A = 25^{\circ}C$, **bold** values indicate $-40^{\circ}C \leq T_A \leq +85^{\circ}C$, $T_A = T_J$; unless noted.

Symbol	Parameter	Condition	Min	Typ	Max	Units
G_E	Gain Error	MIC6251: $A_V = 2$, $V_O = \pm 10V$ MIC6252: $A_V = 0.5$, $V_O = \pm 10V$		0.3 0.3	0.5 0.5	% %
G_{NL}	Gain Non-linearity	MIC6251: $A_V = 2$, $V_O = \pm 10V$ MIC6252: $A_V = 0.5$, $V_O = \pm 10V$		0.01 0.01		% %
V_{OS}	Offset Voltage	MIC6251: Referred to output MIC6252: Referred to output		4 2	14 7	mV mV
TCV_{OS}	Average Offset Drift			7		$\mu V/^{\circ}C$
I_B	Input Bias Current			50	250	nA
V_{CM}	Input Voltage Range, Differential	Note 3		± 25		V
	Input Volt. Range, Common Mode		± 13.5	± 13.8		V
CMRR	Common Mode Rejection Ratio	$\Delta V_{CM} = 27V$, $-13.5V$ to $+13.5V$	65	100		dB
PSRR	Power Supply Rejection Ratio	$\Delta V_S = 25V$, $\pm 15V$ to $\pm 2.5V$	65	110		dB
V_{OUT}	Maximum Output Voltage Swing	$R_L = 2k$	± 12.5	± 14		V
B_W	Bandwidth			2		MHz
S_R	Slew Rate			6		V/ μs
I_S	Supply Current			1.3	2.0	mA









General Note : Devices are ESD protected; however, handling precautions are recommended.

Note 1: IN+ and IN- pins on the MIC6252 are interchangeable.


Note 2: Gain setting resistors are ratio-matched but have a $\pm 20\%$ absolute tolerance

Note 3: Limit input current to 1mA.


Typical Characteristics

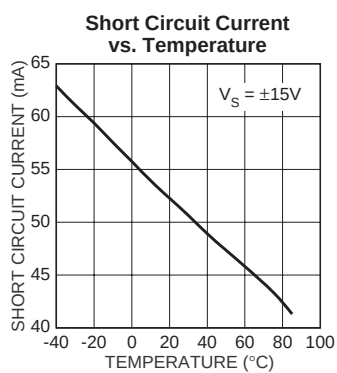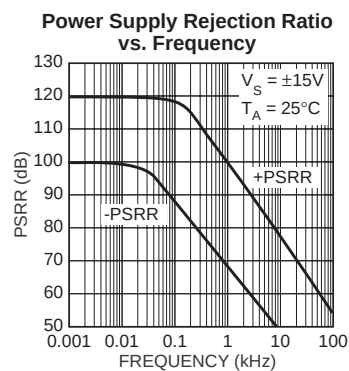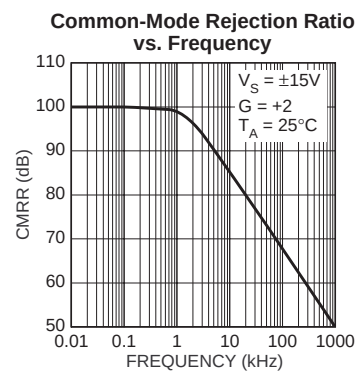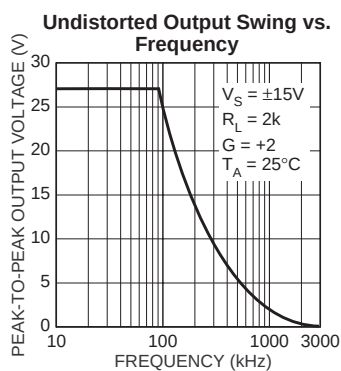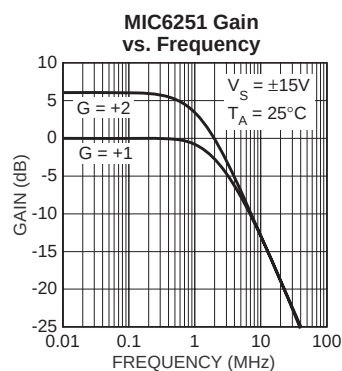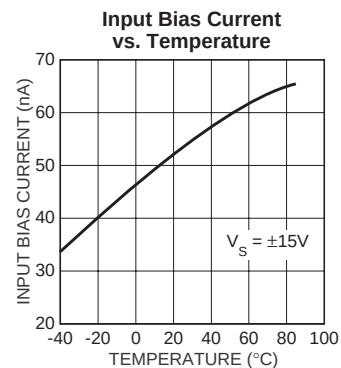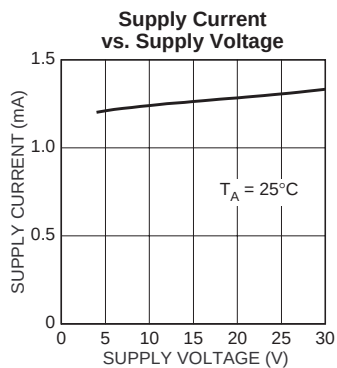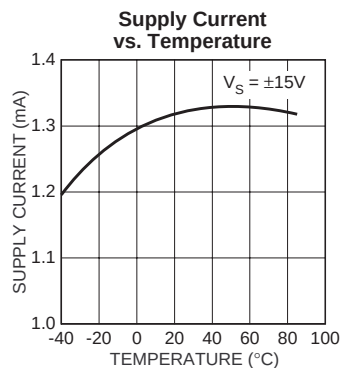


MIC6251 Large-Signal Transient Response

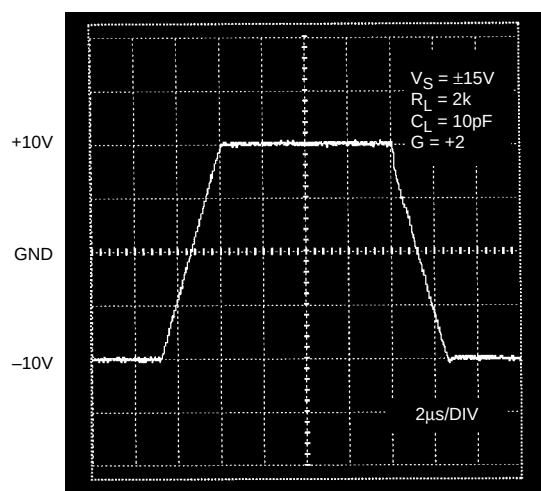


MIC6251 Large-Signal Transient Response

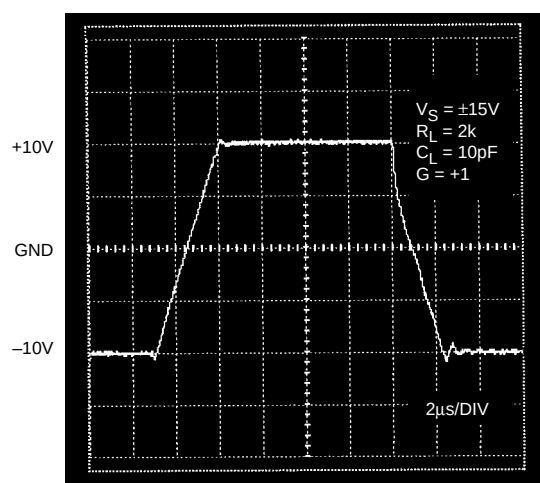


MIC6251 Large-Signal Transient Response

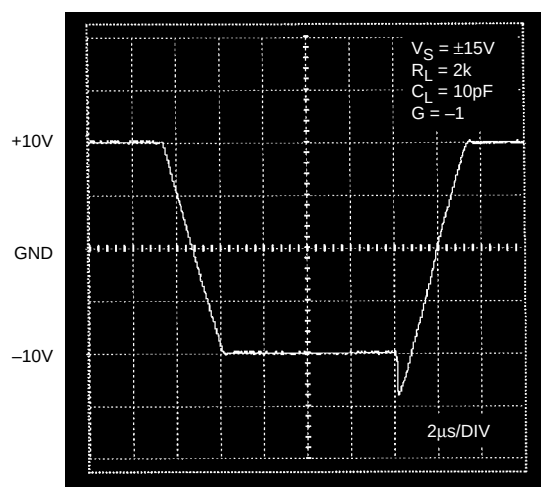


MIC6252 Large-Signal Transient Response

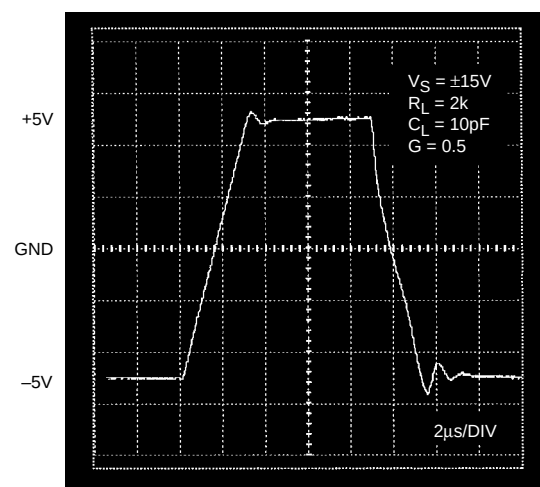

MIC6251 Small-Signal Transient Response

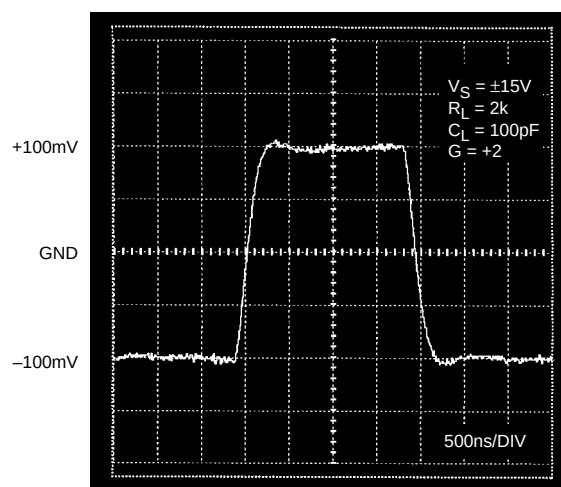

MIC6251/2 0.1Hz to 10Hz Noise
Gain = +1

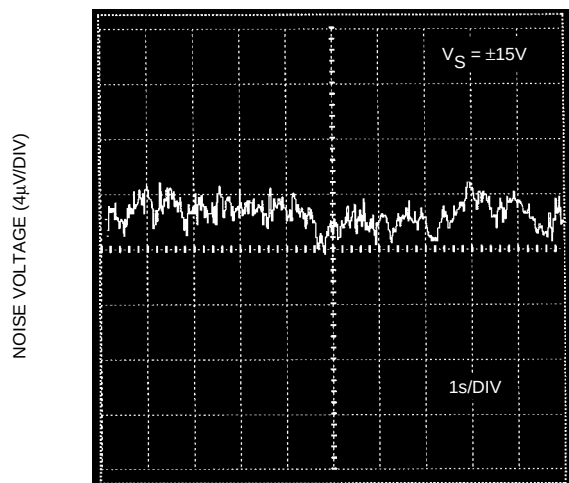

MIC6251/2 Wideband Noise
Gain +1

