



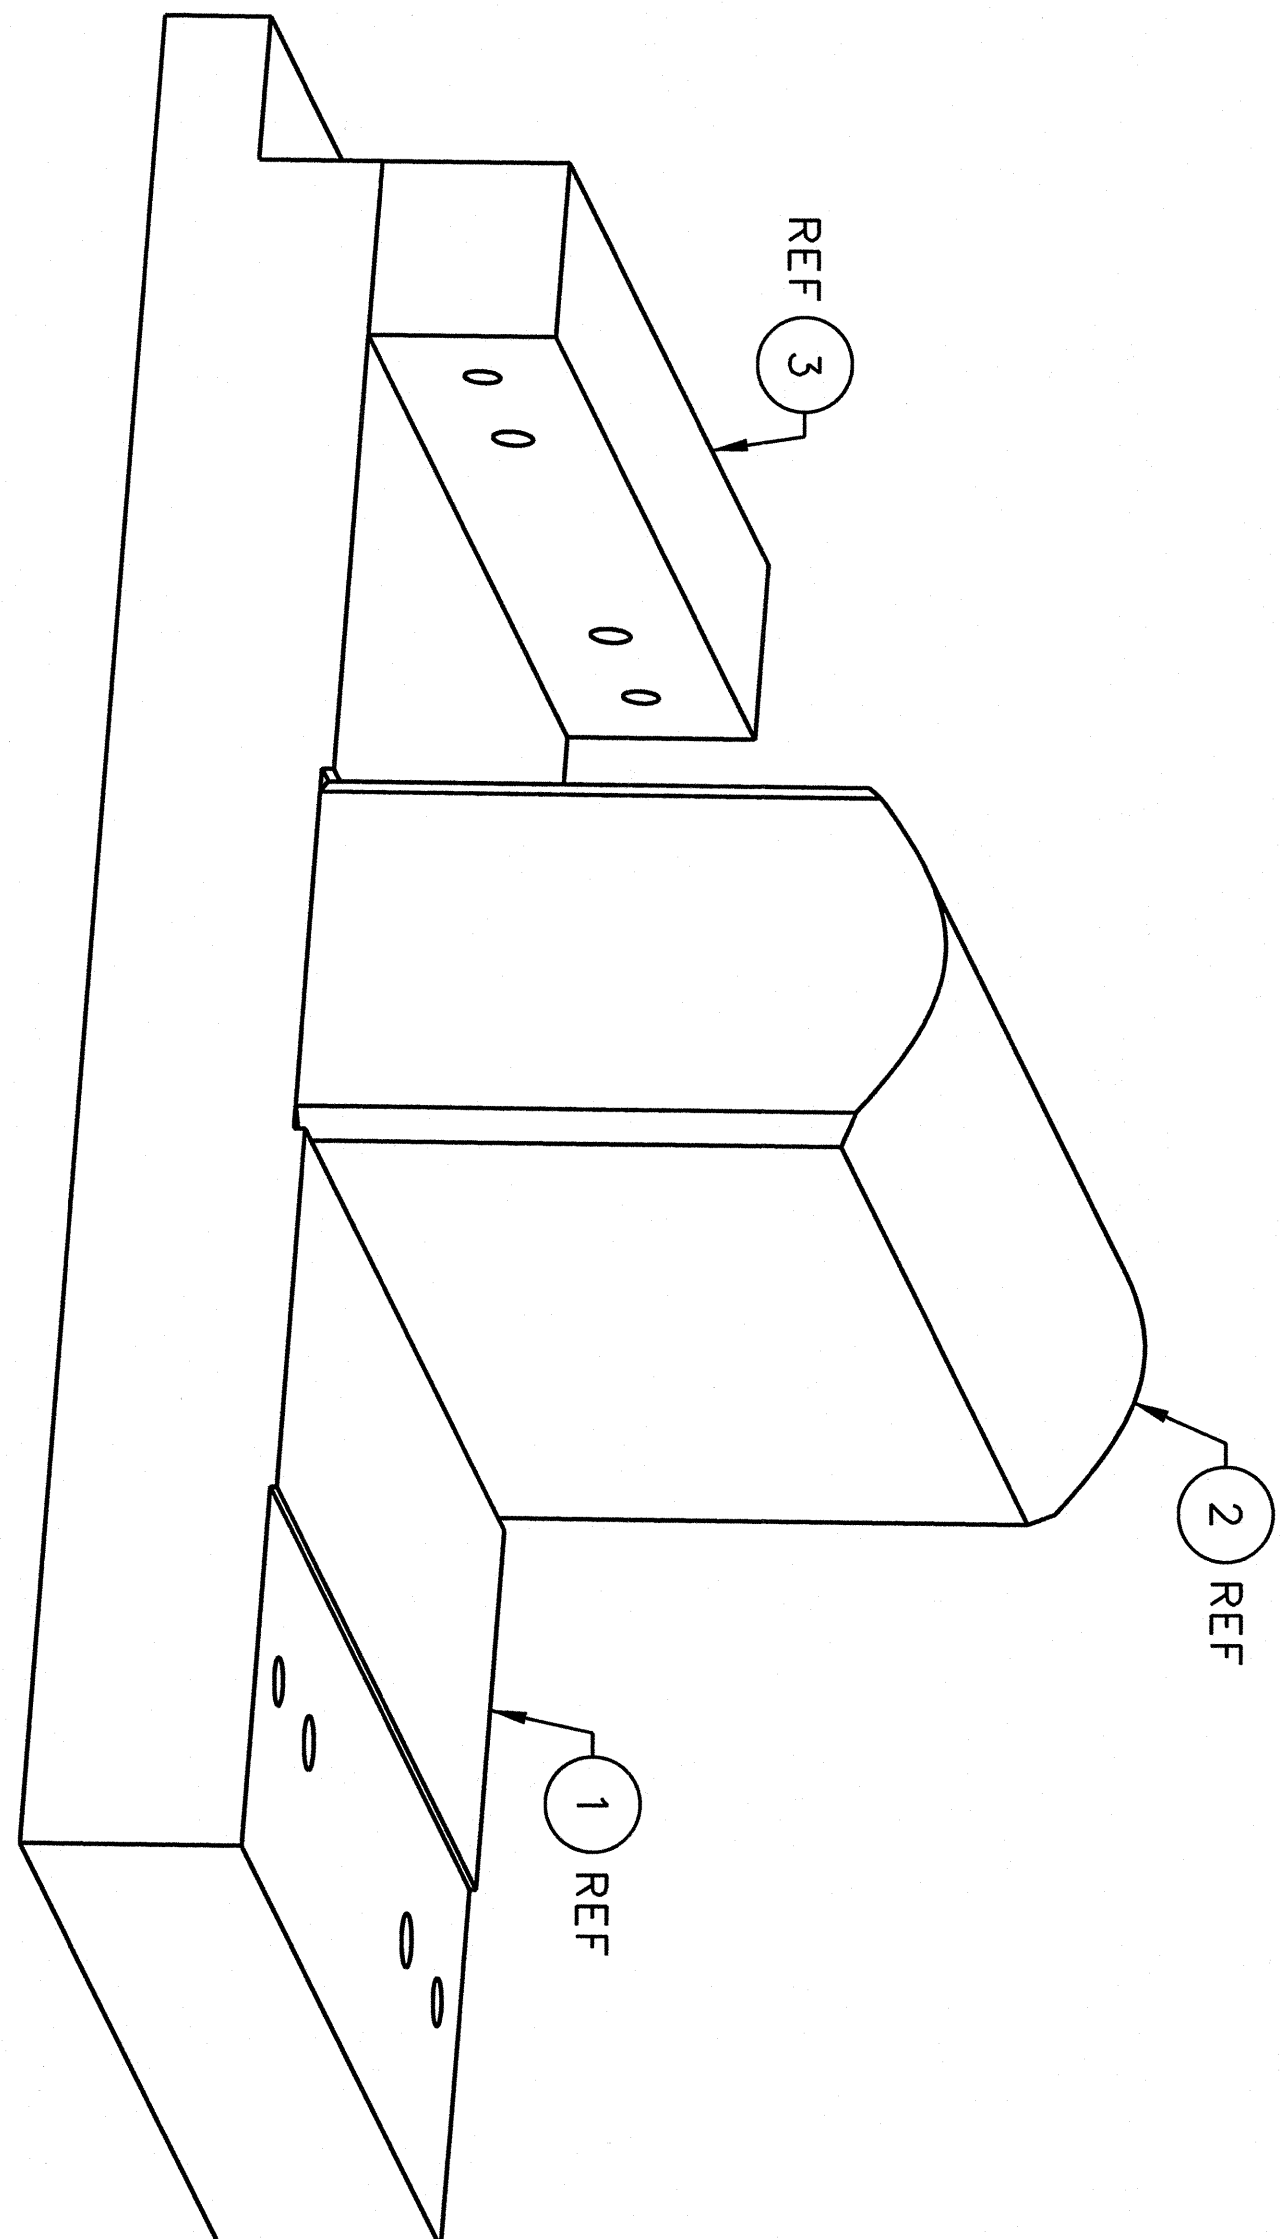


ISO VIEW 2-2F
(AFTER MACHINING)

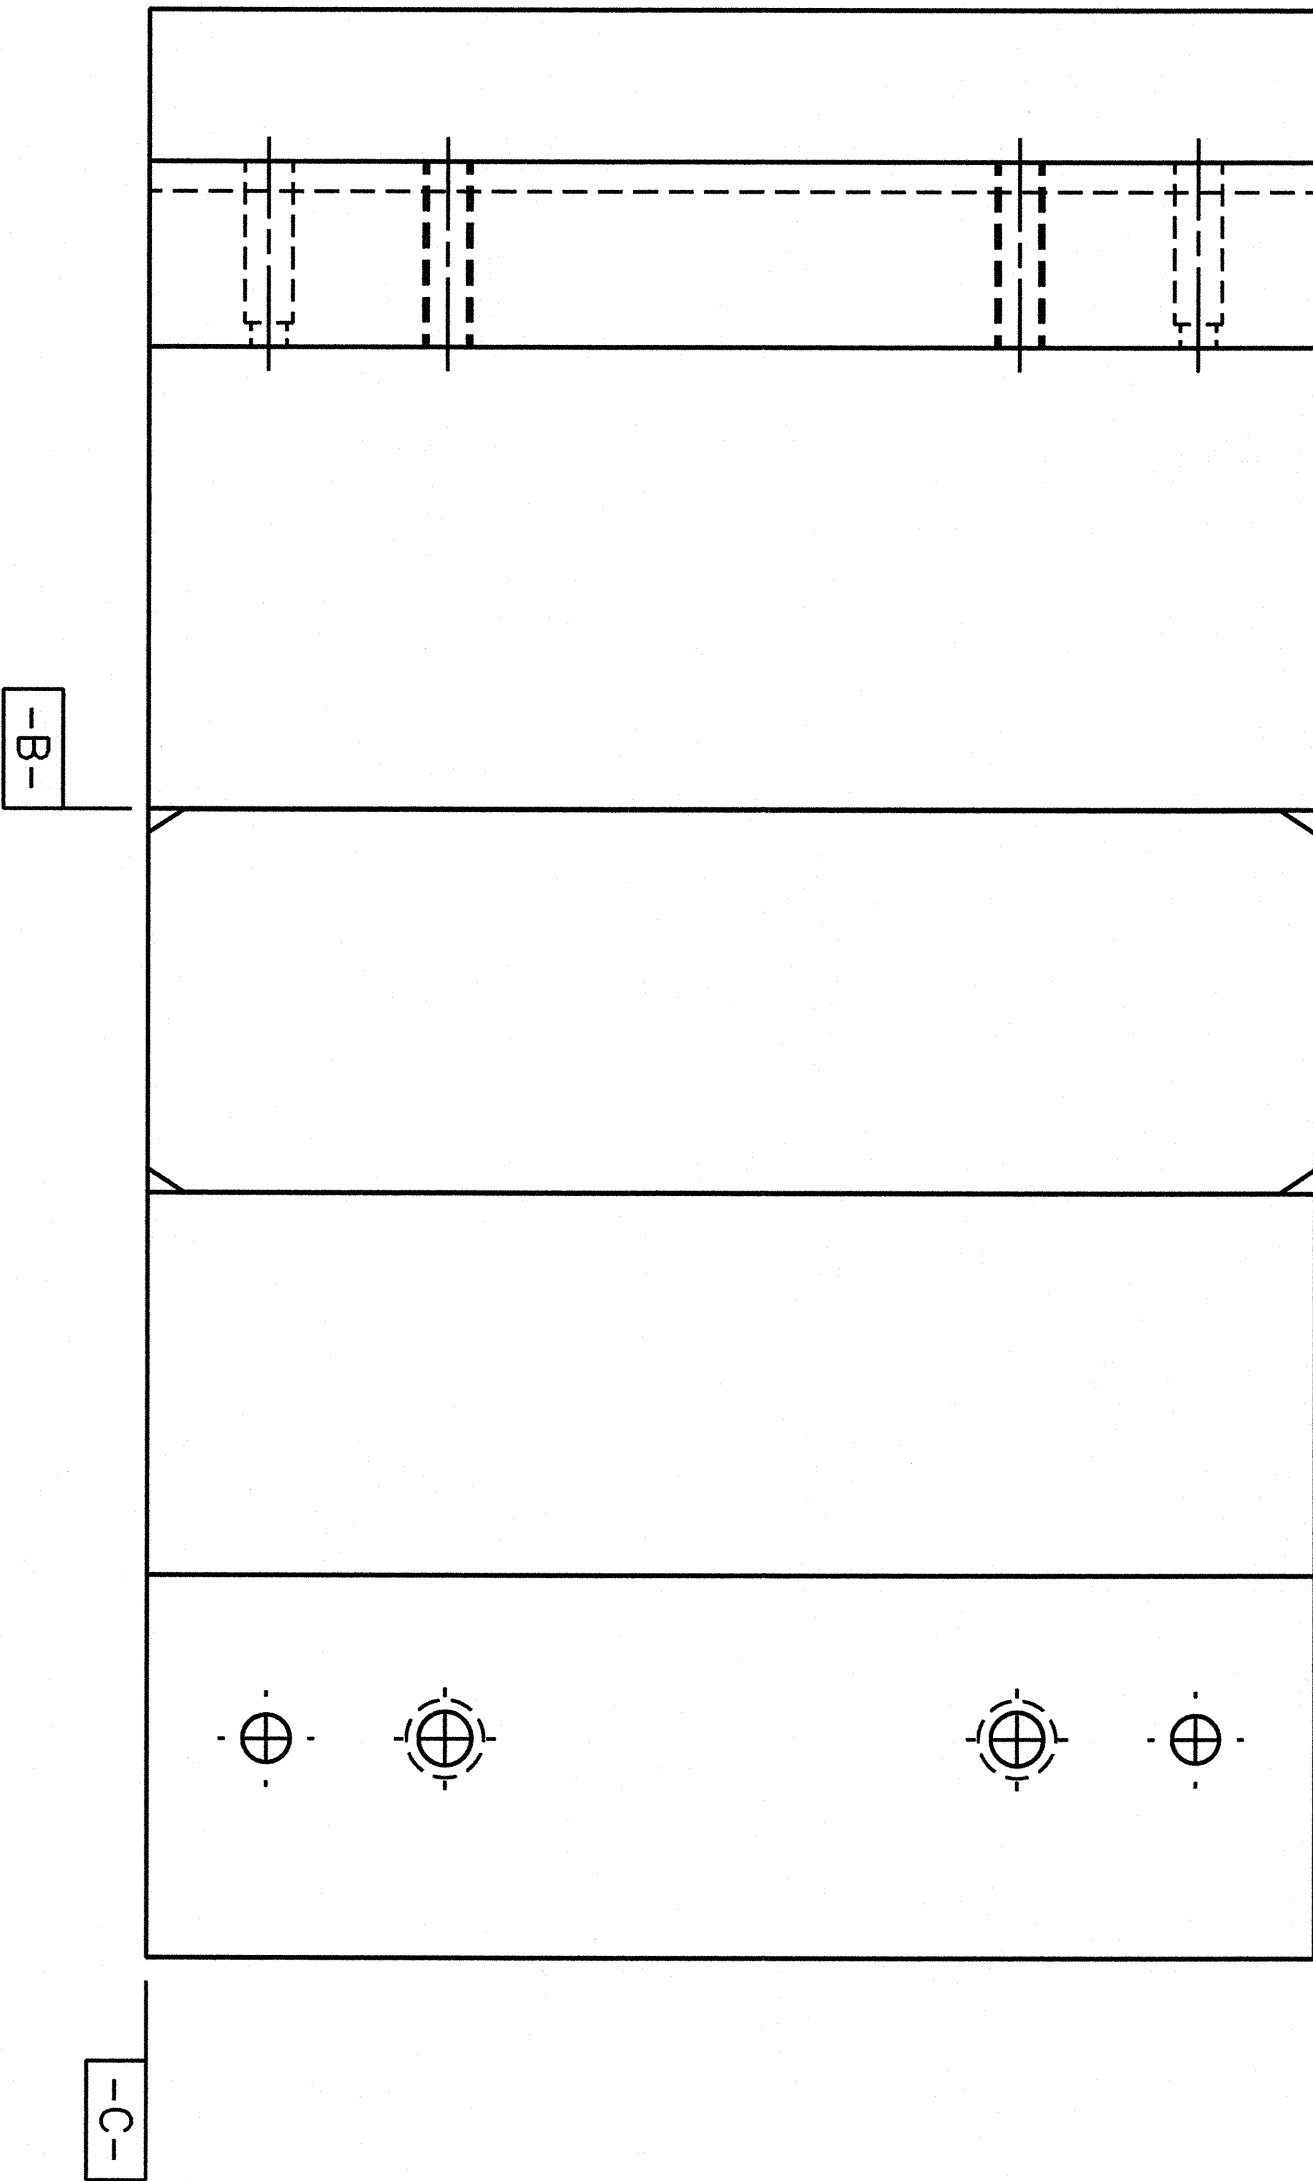


TOP VIEW - TYPICAL SECTOR 2-4F


PROFILE POINTS		
POINT NO:	X CENTER	Y
01	0.000	0.000
02	6.781	6.964
03	6.934	7.093
04	7.094	7.222
05	7.261	7.351
06	7.441	7.480
07	7.637	7.609
08	7.860	7.737
09	8.140	7.866
10	8.331	7.931
11	8.781	7.995
12	9.231	7.931
13	9.423	7.866
14	9.702	7.737
15	9.926	7.609
16	10.122	7.480
17	10.301	7.351
18	10.469	7.222
19	10.628	7.093
20	10.781	6.964

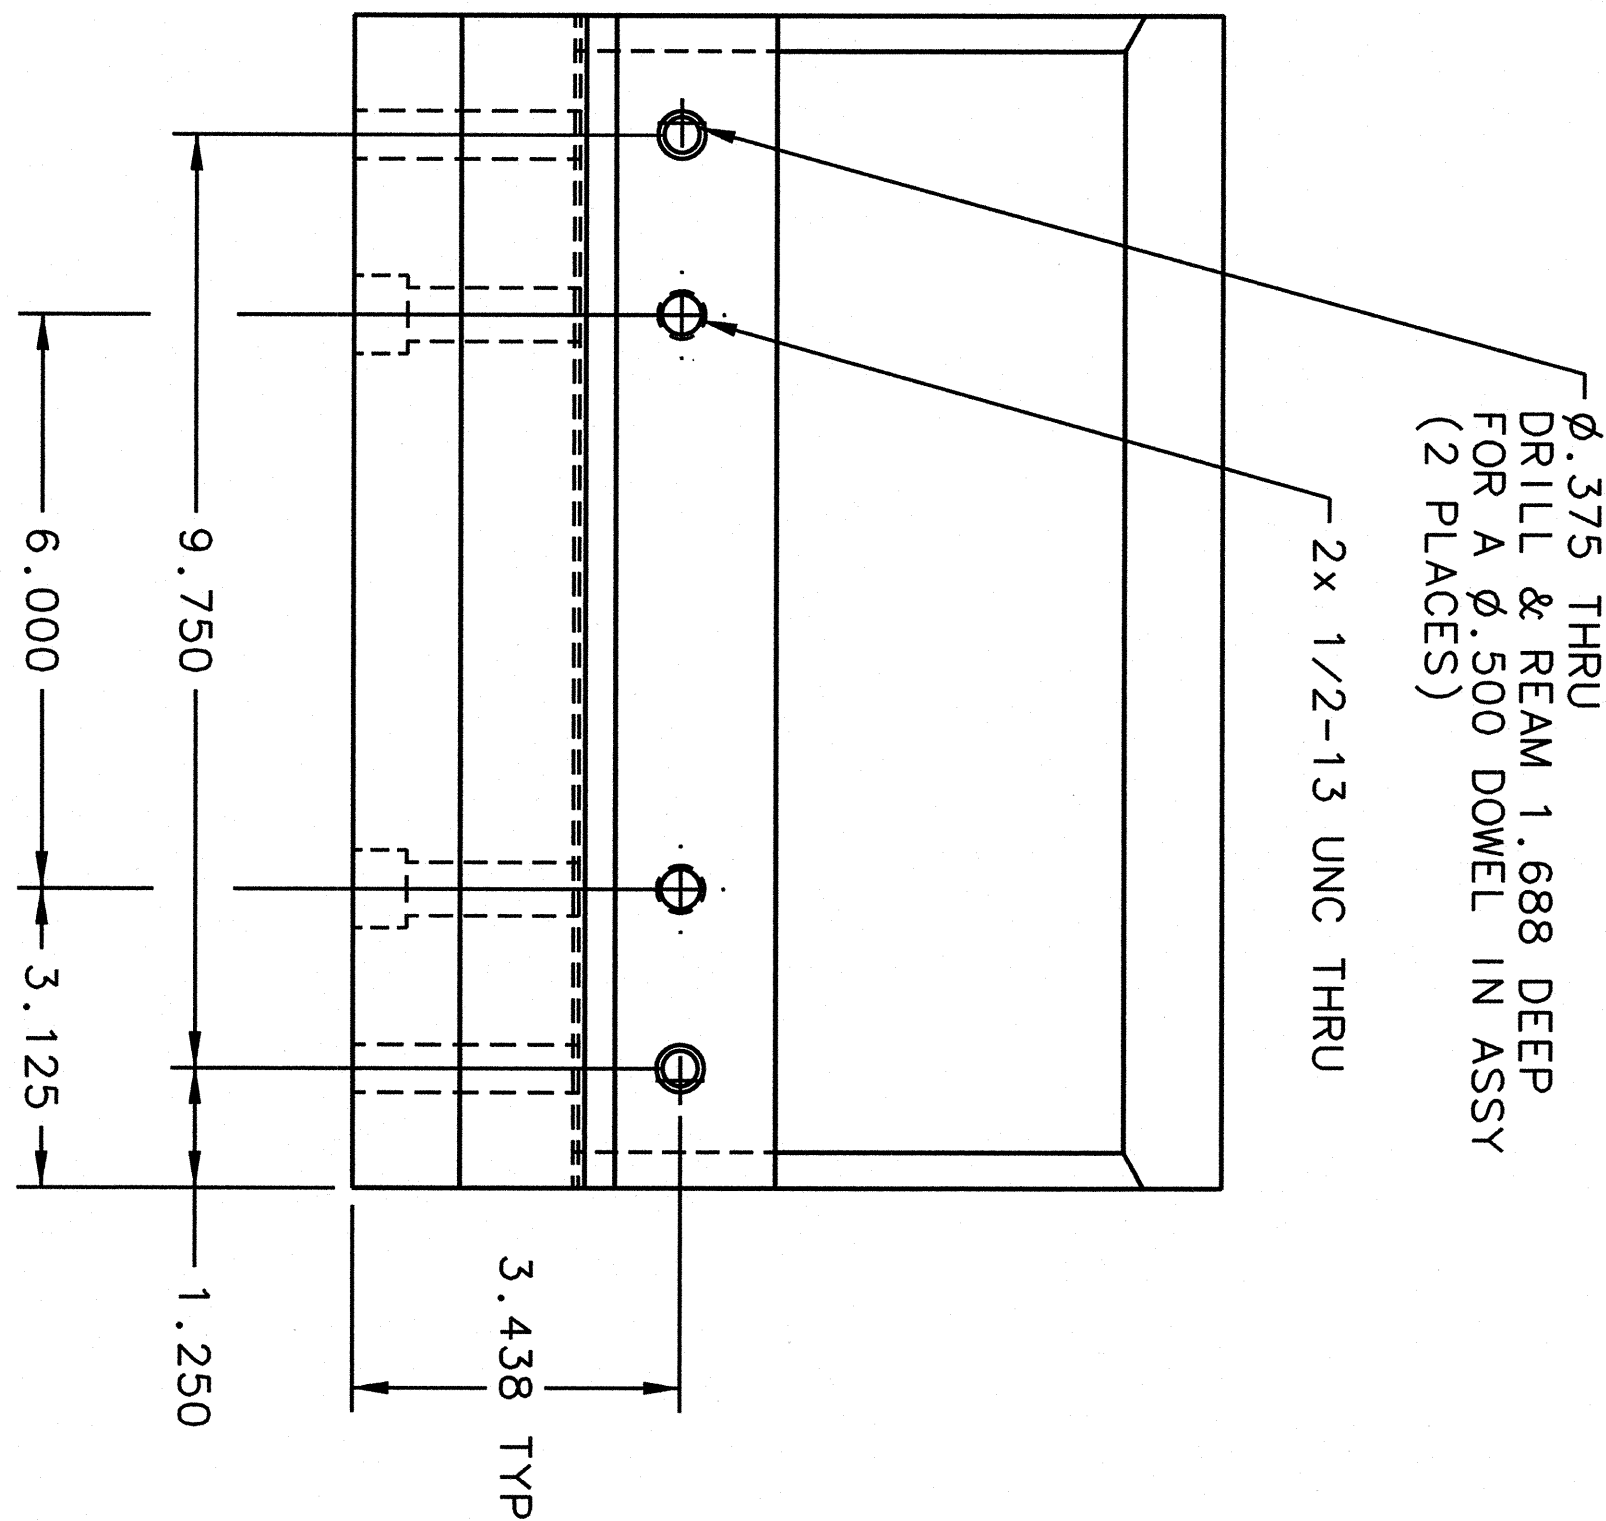


L SIDE VIEW - TYPICAL SECTOR 2-7D

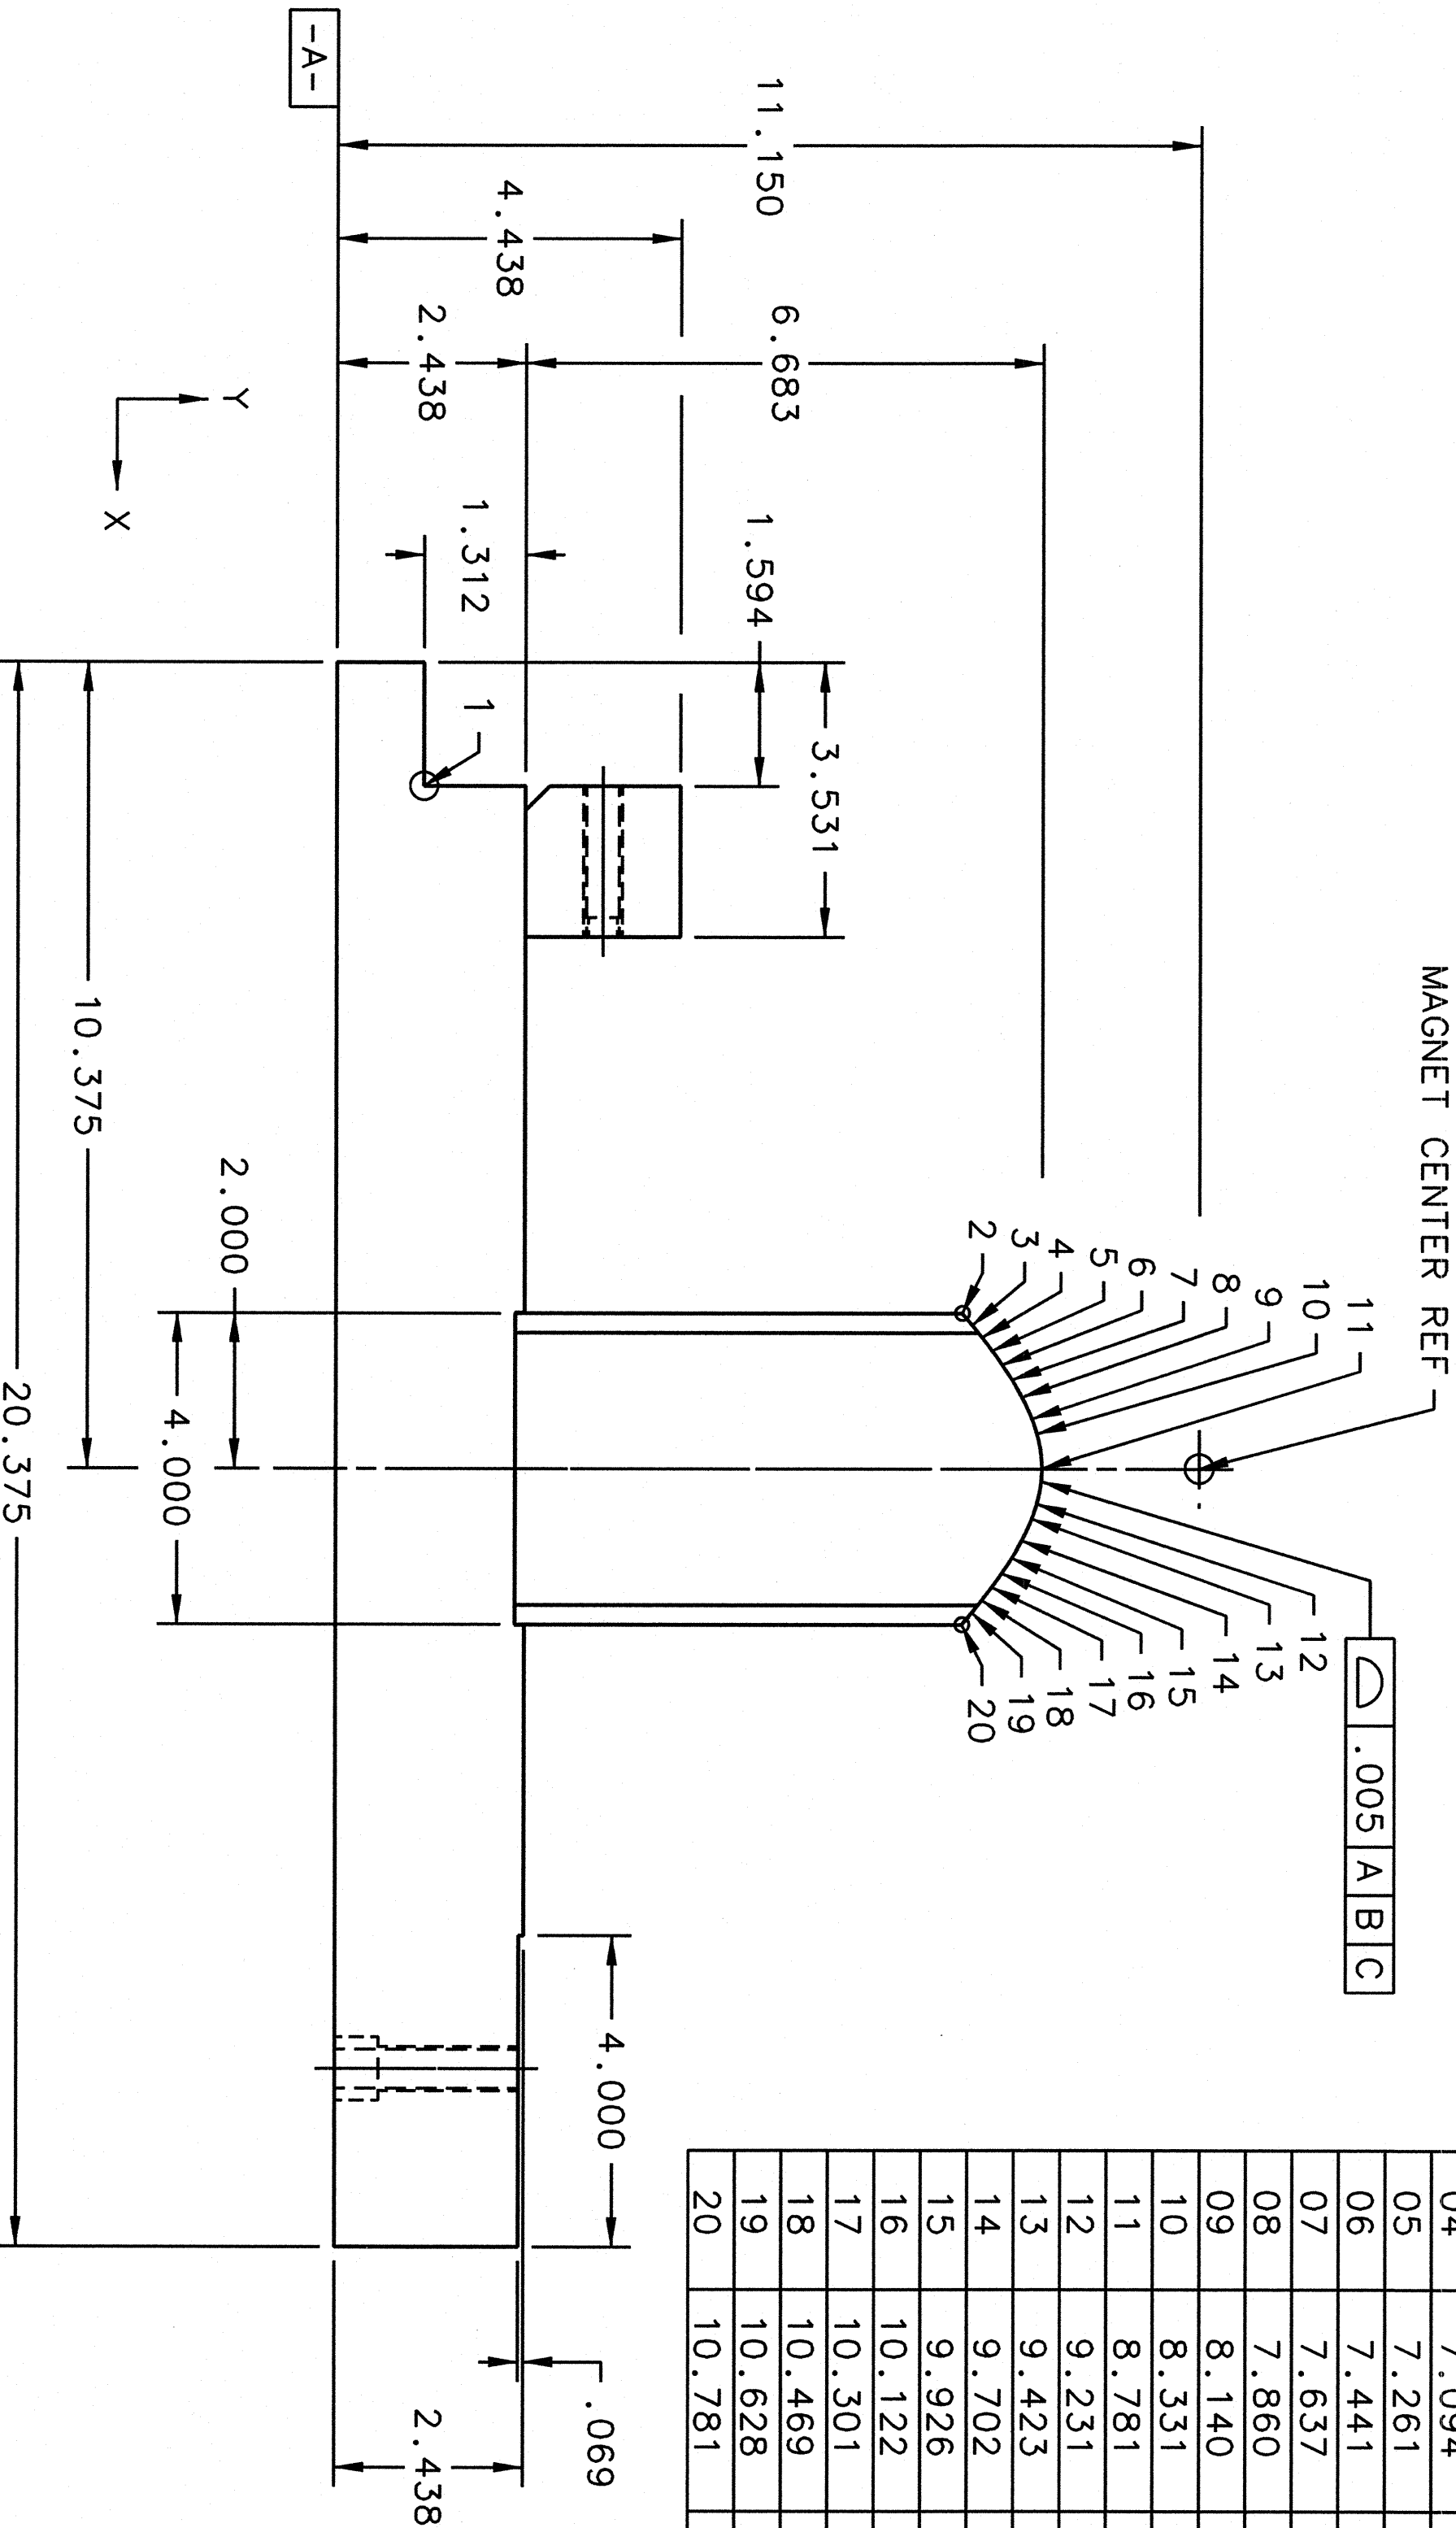


FRONT VIEW - TYPICAL SECTOR 2-4D

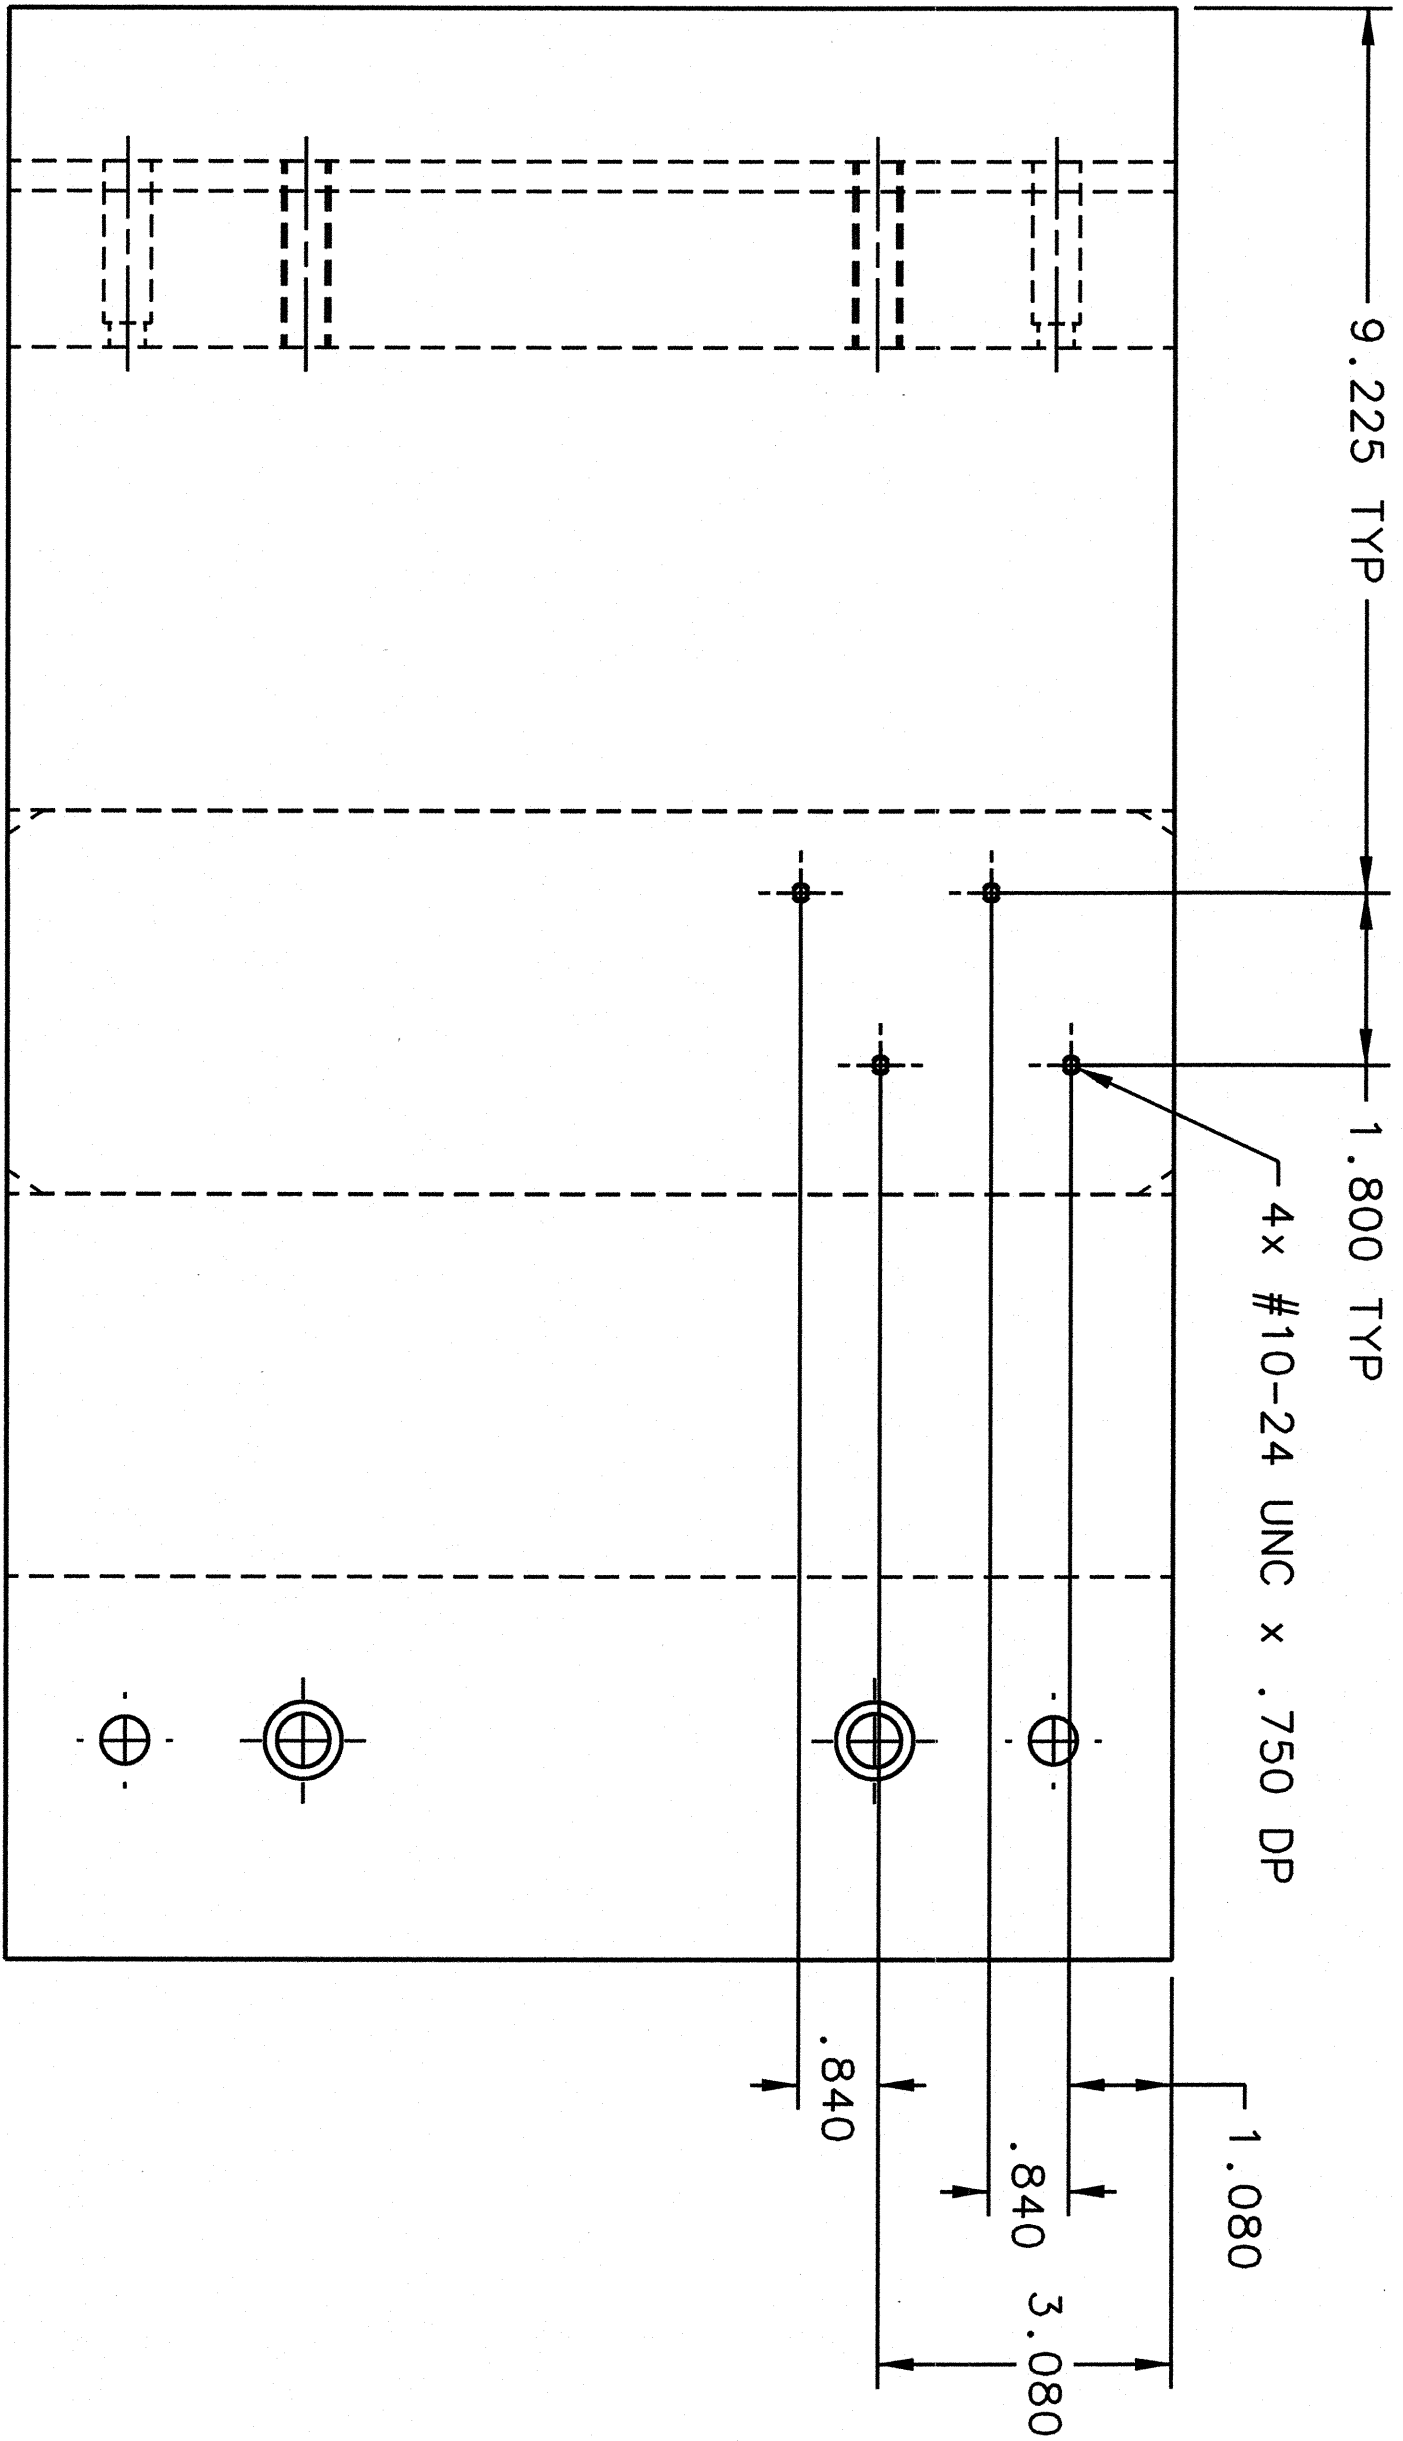


BOTTOM VIEW - TOP BL SECTOR 2-7A
(THE ADDL FOUR HOLES SHOWN MOUNT THE TWO
MANIFOLDS ONTO THIS SECTOR ONLY - 1 REOD)

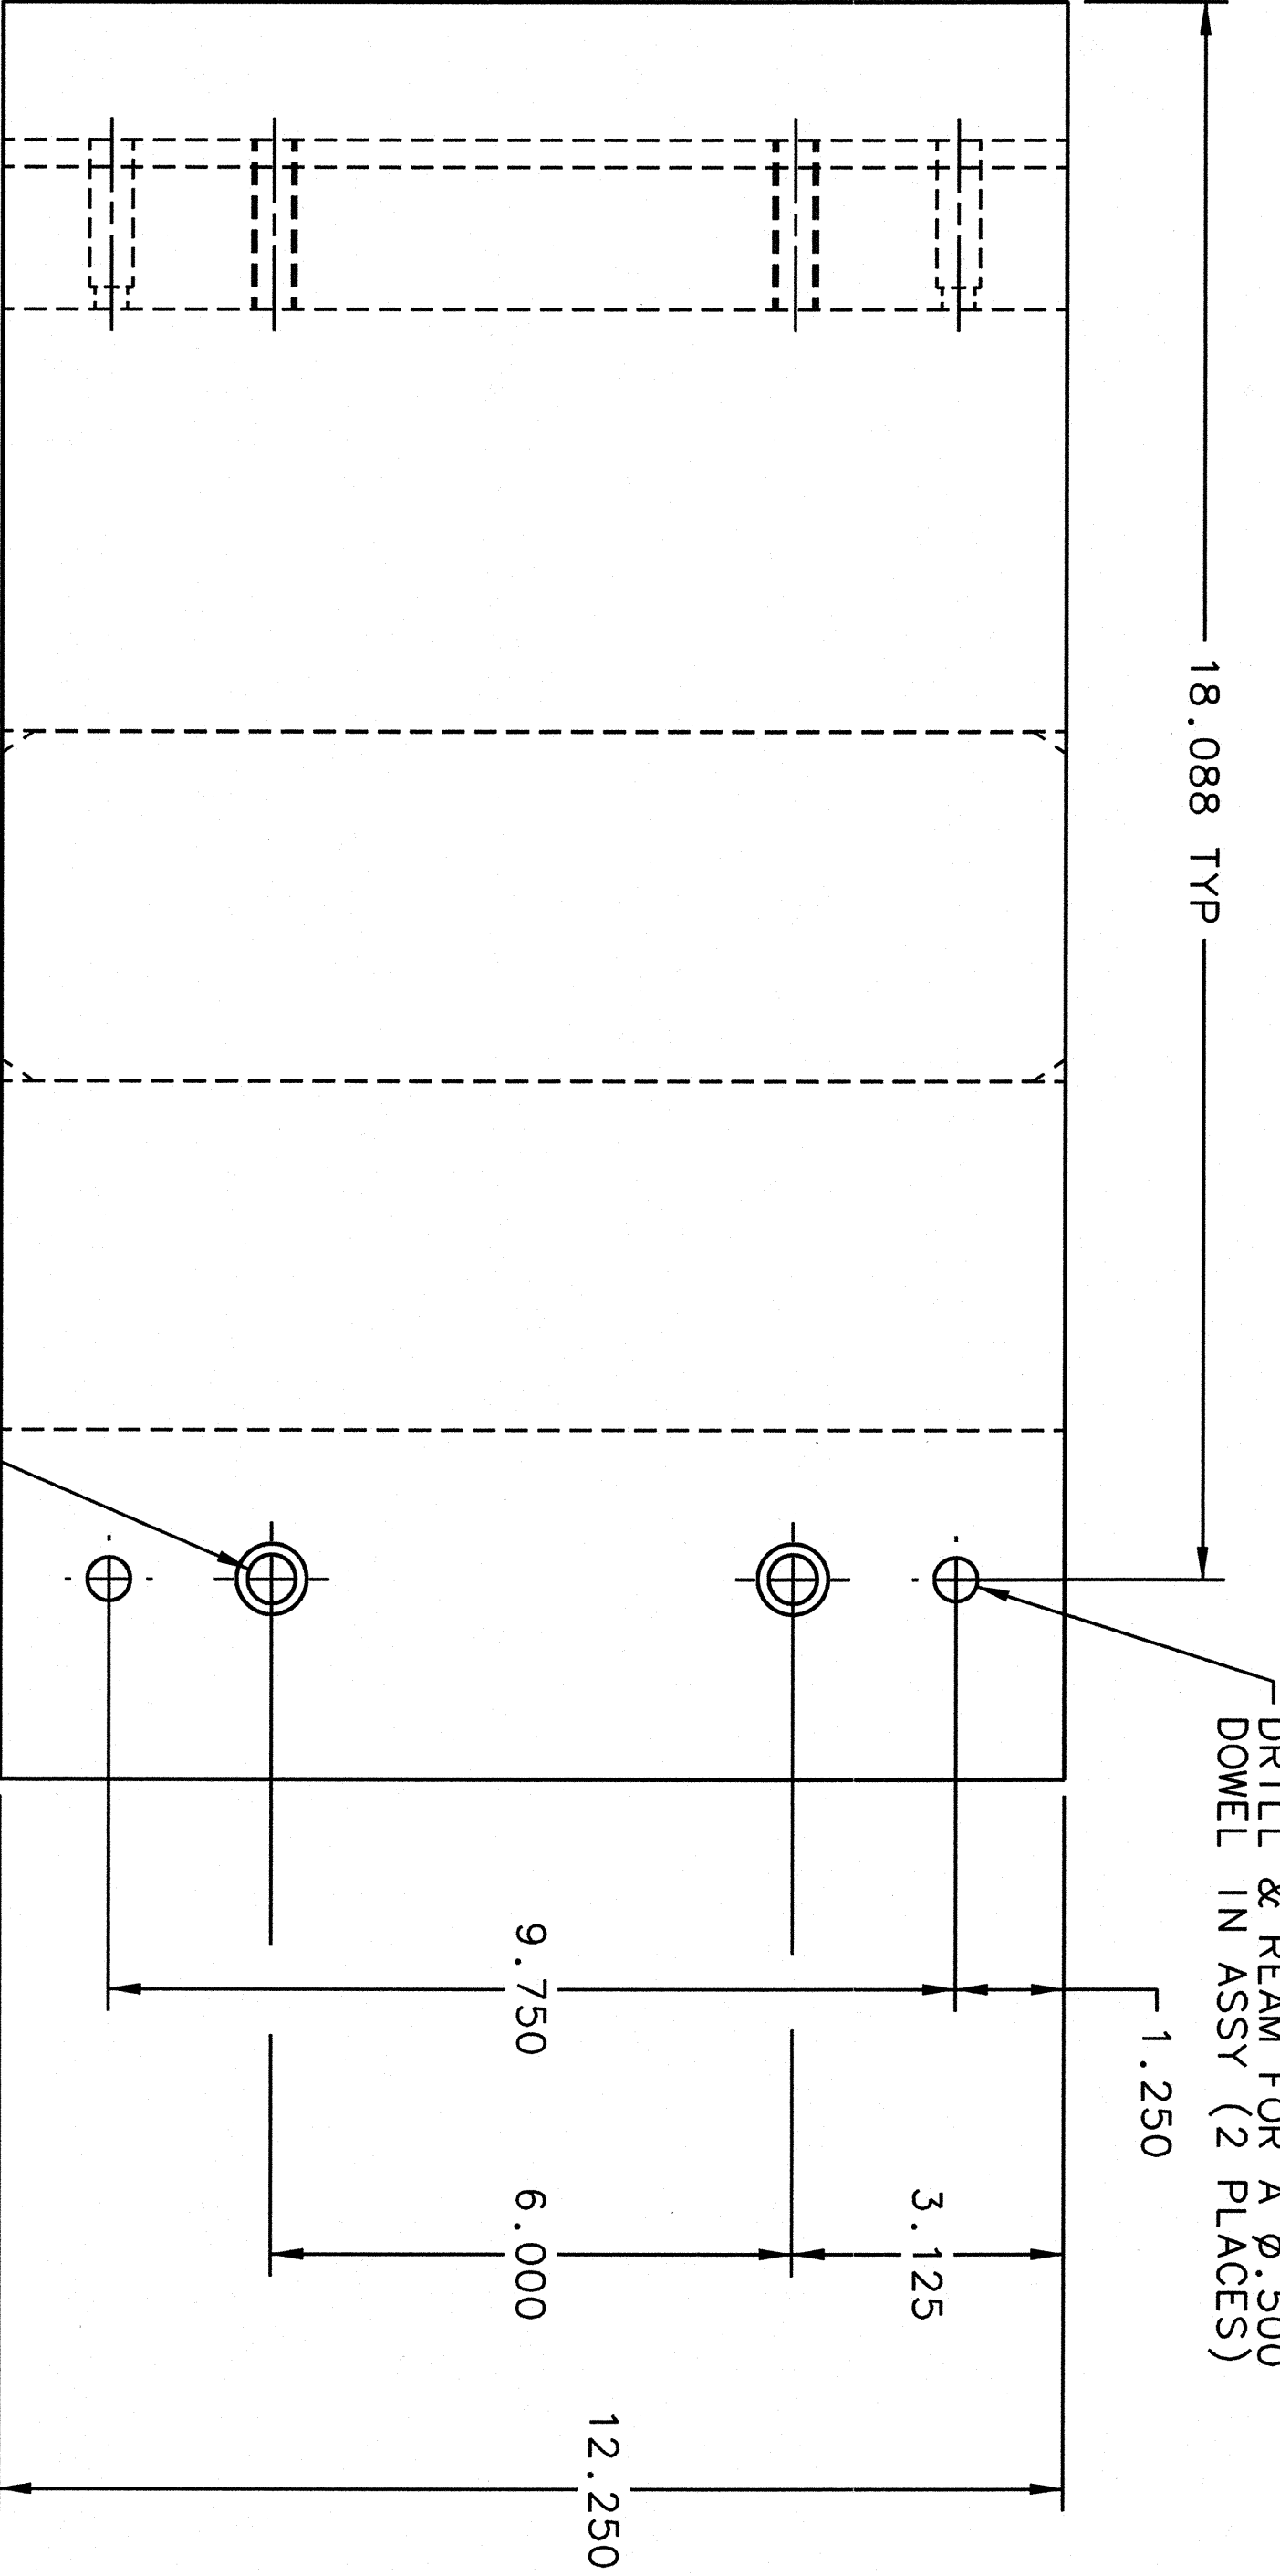

BOTTOM VIEW - TOP BR SECTOR 2-4A
(TYPICAL FOR ALL FOUR SECTORS - 1 REOD)

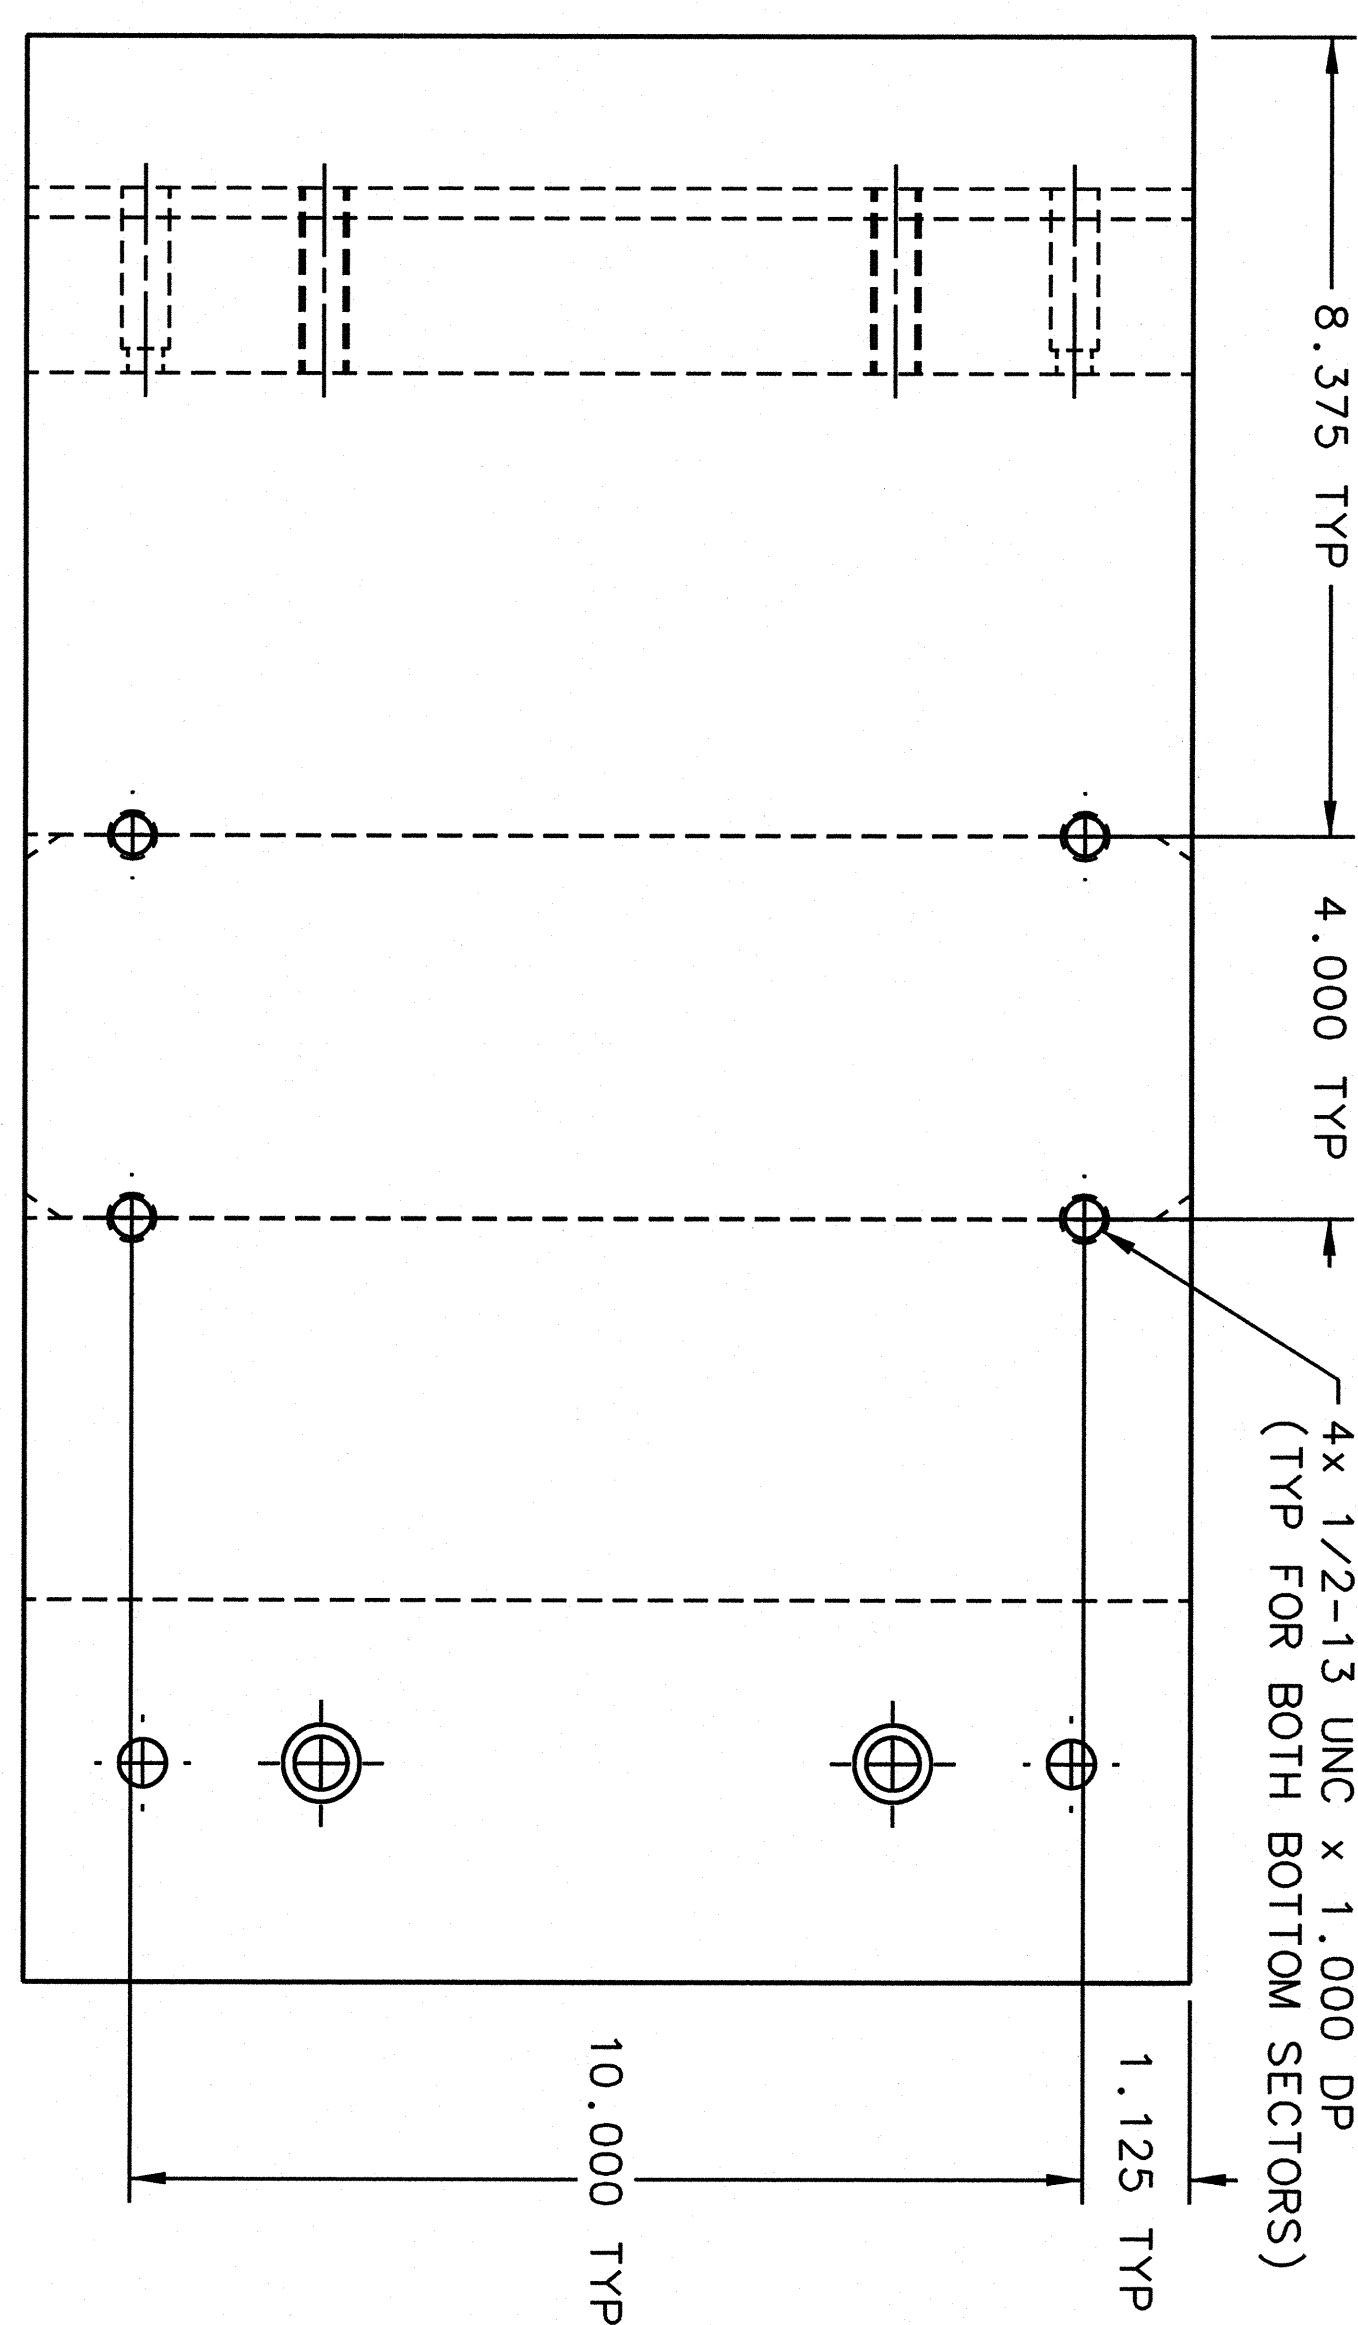

BOTTOM VIEW - BOTTOM BL SECTOR 2-1D
(THE ADDL FOUR HOLES SHOWN ARE USED FOR SUPPORTING
THE MAGNET FROM BELOW - 1 REOD)

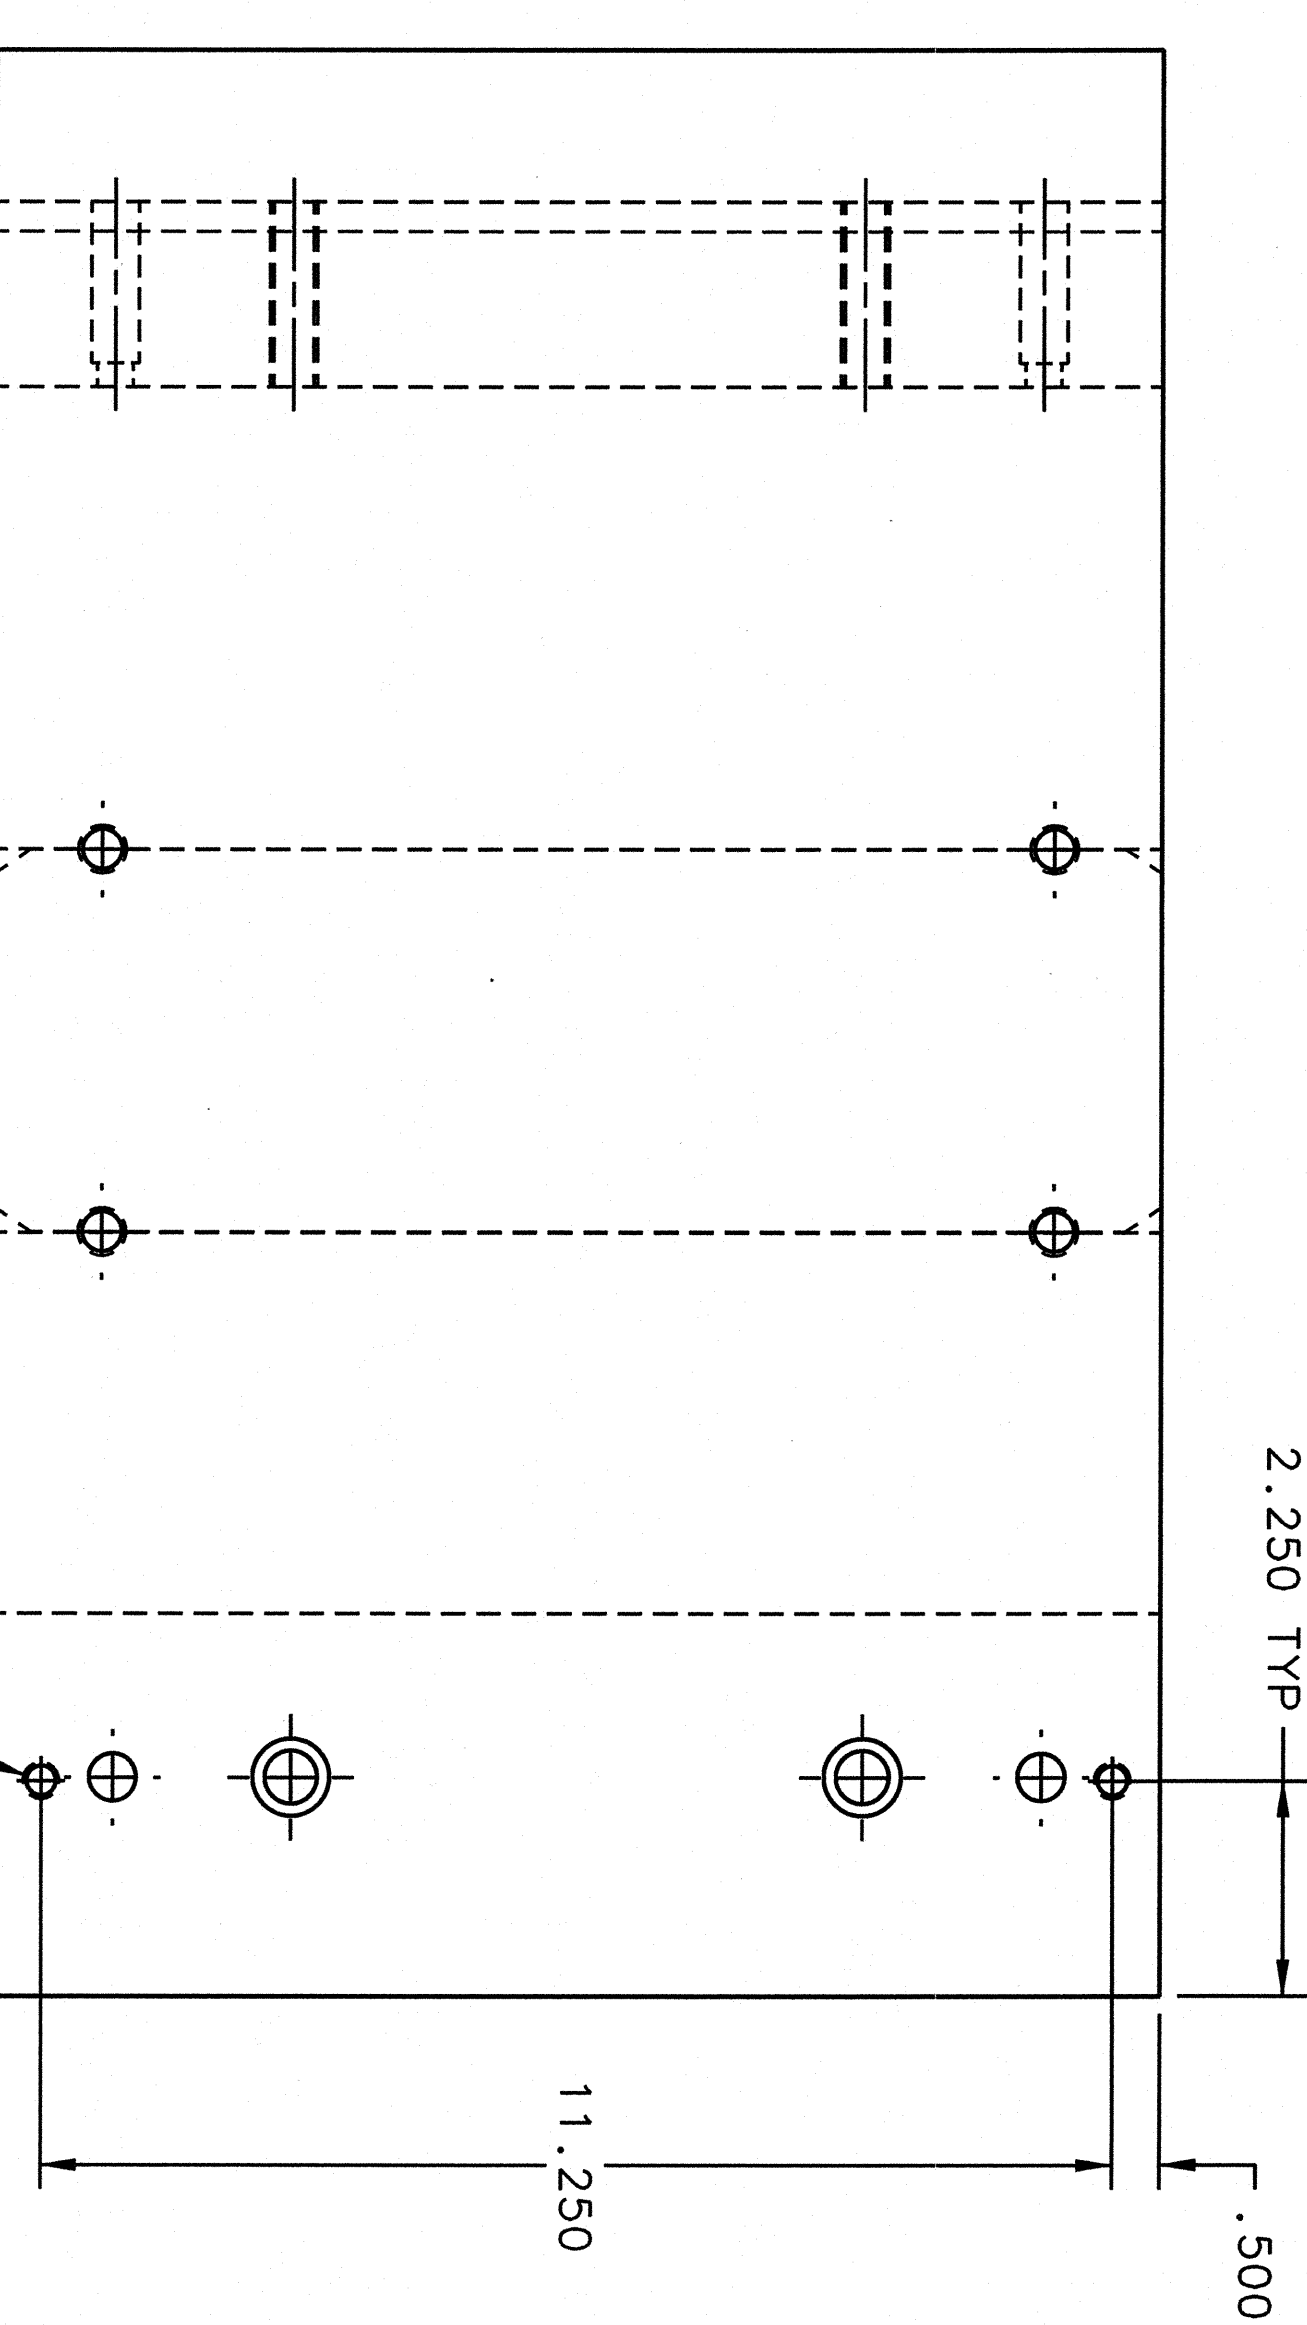

BOTTOM VIEW - BOTTOM BR SECTOR 2-1A
(THE BOTTOM BL & BR SECTORS ARE TYPICAL. THIS BR SECTOR HAS TWO ADDL
HOLES SHOWN FOR MOUNTING THE POWER MAIN CONNECTION ASSY - 1 REOD)