

H12445-100 MOD Anode Uniformity

Light Source: W-Lamp+ 5-58[Filter]

Divider Ratio : 2.3-1.2-1-1...1-1-0.5

Serial No.:DA0252

Ebb : -740 V at Gain 2E+4

O -HV

88	100	92	80
86	81	62	58
83	75	59	55
85	90	85	74

Top View



Serial No.:DA0254

Ebb : -735 V at Gain 2E+4

O -HV

99	100	84	64
89	74	58	48
86	71	56	49
90	88	78	63

Top View

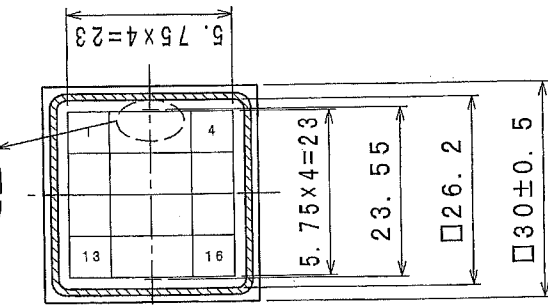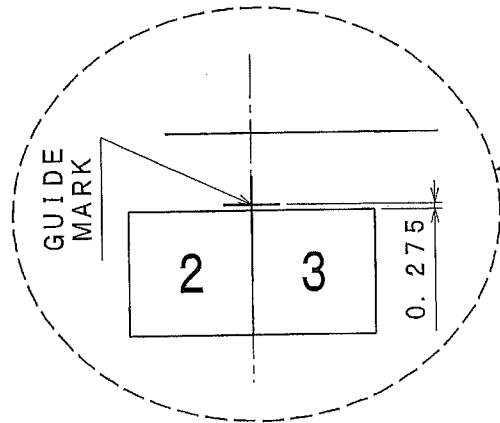

ANODE OUTPUT TERMINAL PINS
($\phi 0.64$, 2.54 PITCH, 4x4)
; TD-104-T-A-1, SAMTEC x2PCS

DMY12 OUTPUT
TERMINAL PINS ($\phi 0.64$)
; ASP-23882-A-1, SAMTEC



PMT:
R11265-100-M16

-HV TERMINAL PINS ($\phi 0.64$)
; ASP-23882-A-1, SAMTEC

INSULATING TAPE

DIVIDER ASSEMBLY

POM CASE

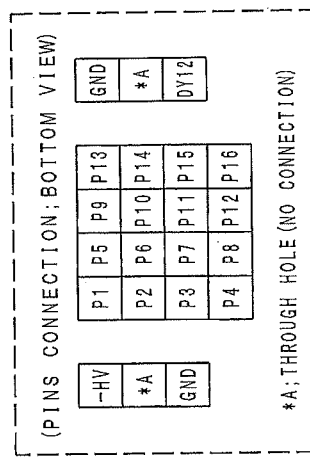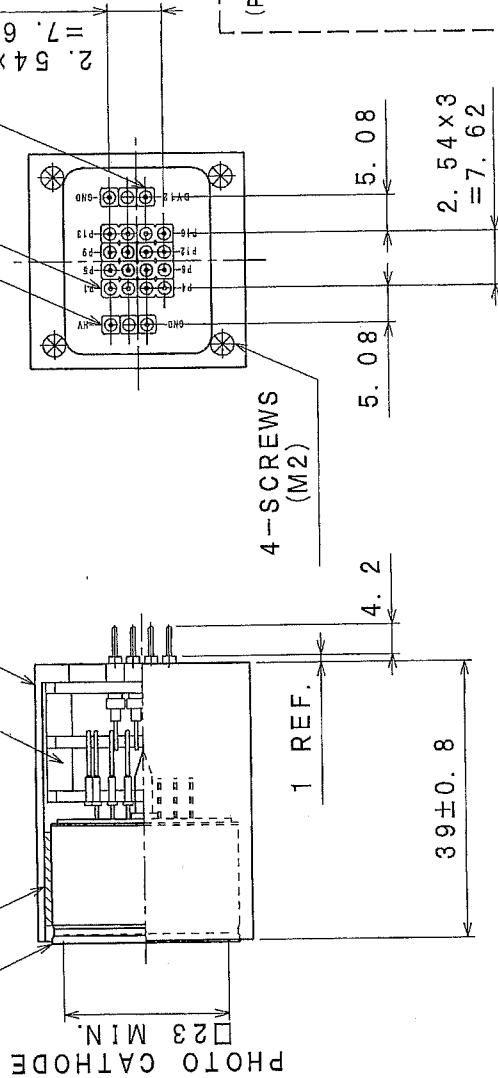

NOTE; Suitable sockets for all terminal pins will be attached.

UNIT: mm

TITLE 品名

DATE

SCALE 尺度

2014.06.02

1/1

DIMENSIONAL OUTLINE

H12445-100 MOD

DRAW. NO. 図面番号

HAMAMATSU PHOTONICS K. K.

21B-493

