

---

# FY22 Research Ramp-up Plan

SoLID Collaboration

September 8<sup>th</sup>, 2021


# SoLID FY22 Research Rampup Plan

---

- Beamtest in FY22 – high luminosity (high rate and high radiation) beam test of detector setup and DAQ system, as suggested by the Feb 2021 Director's Review of SoLID
  - Cherenkov detectors had high rate tests in 2020
  - ECal had calibration tests at FTBF, while simulations showed no show-stopper, need high rate beam test
  - GEM with new VMM readout is currently being bench tested with (x-ray mimic) high rate. Needs high radiation test with beam in an actual hall environment (SBS lessons learned)
  - ➔ Focus will be high rate on ECal and GEM VMM3 readout
- Beam test of detector and DAQ at high luminosity will help to identify issues, validate pre-conceptual design, thus reduce cost and scheduling risks.

# Beam test




- Realistic detector setup using existing prototypes

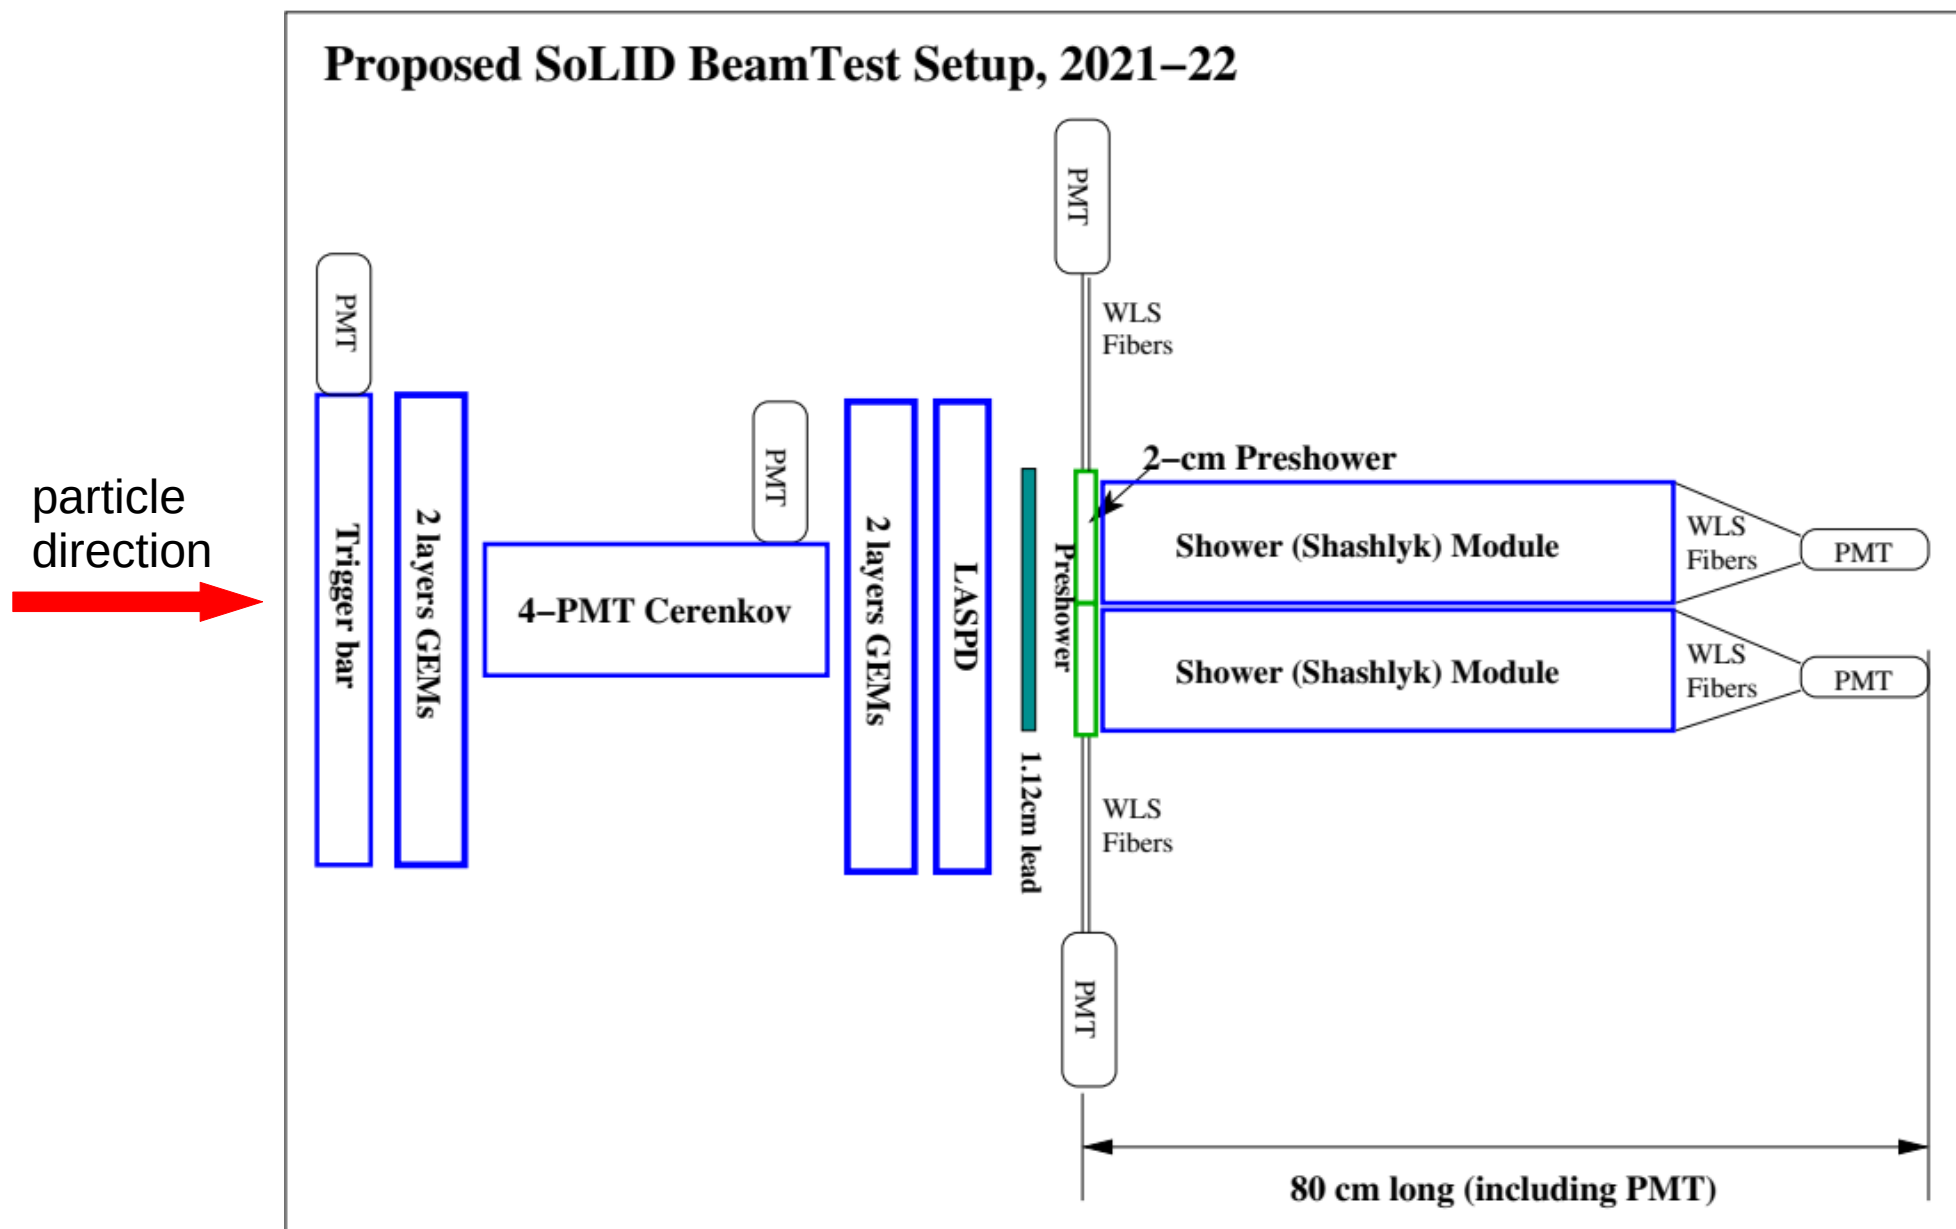

# Beam test

- Realistic detector setup using existing prototypes


## 4-PMT Cherenkov

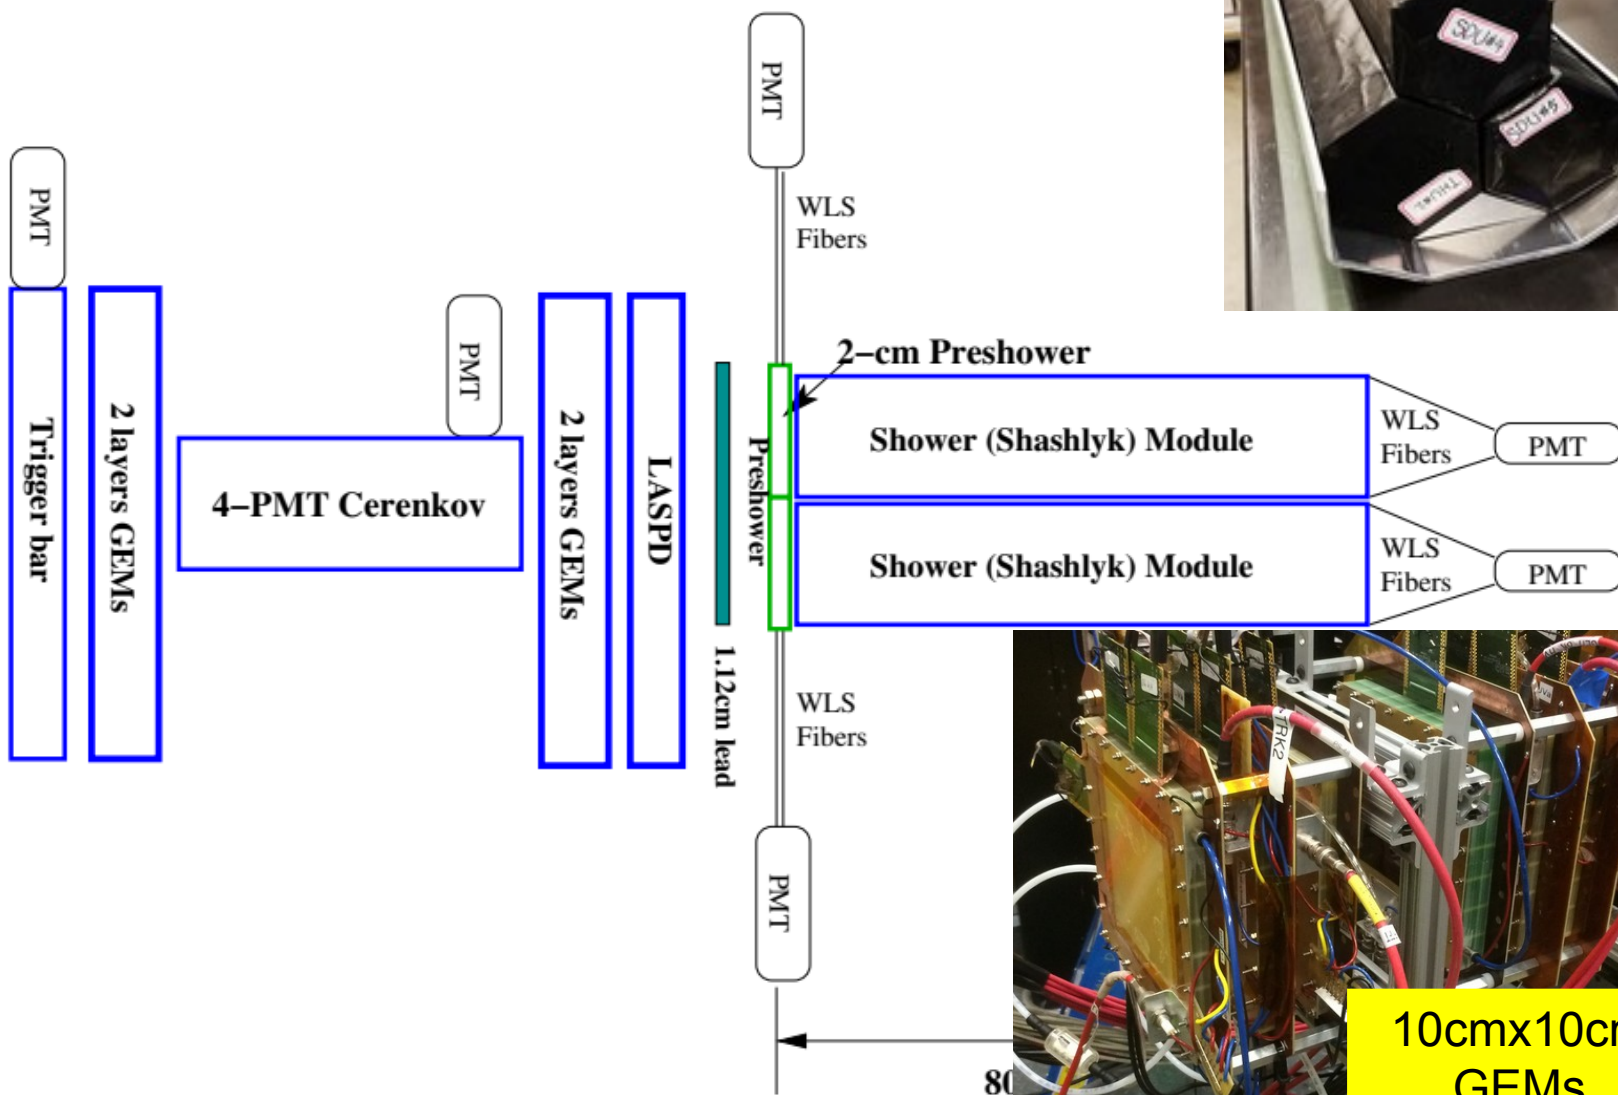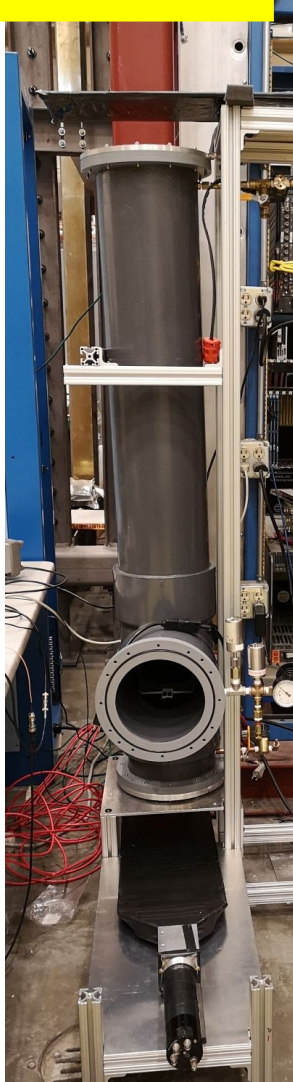

3x shashlyk  
modules




10cmx10cm  
GEMs

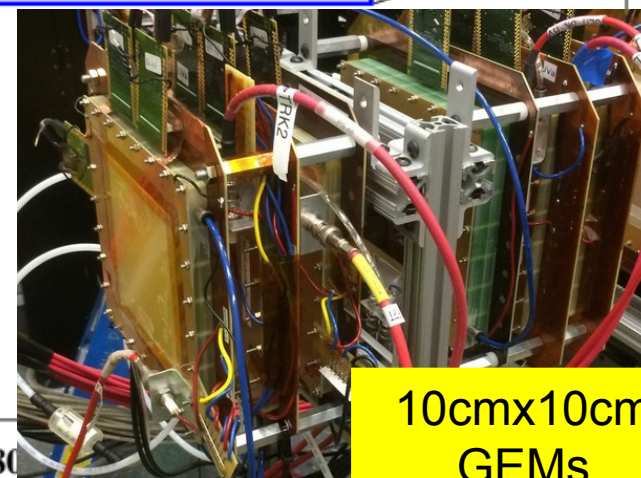

# Beam test – Location

- SBS program in Hall A close to SoLID running
- Hall C unlikely except  $>40^\circ$  deg, could sit on (S)HMS platform?

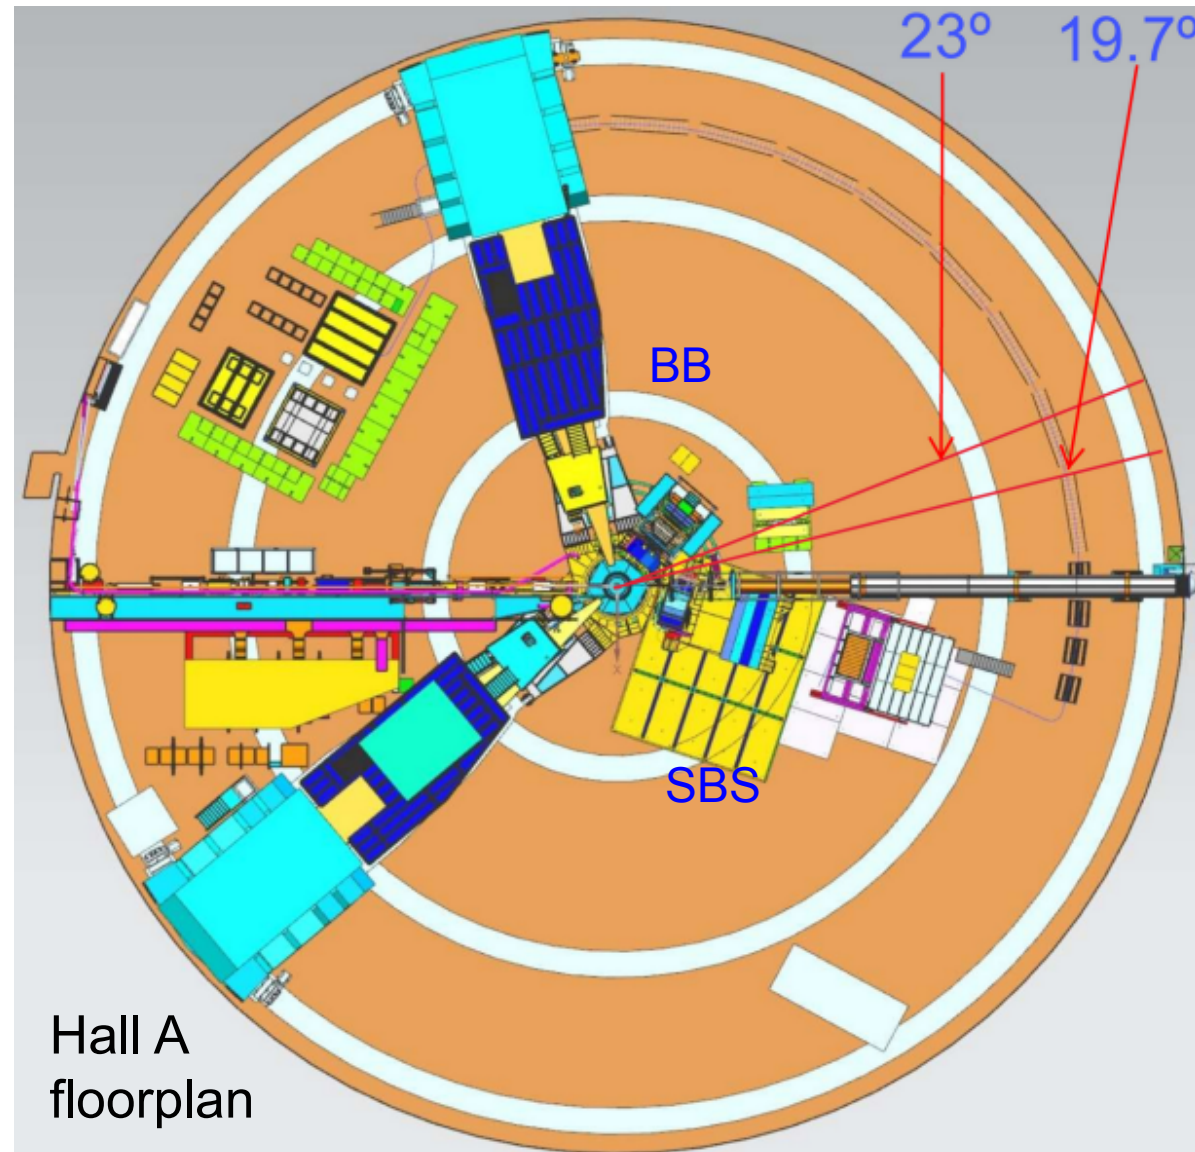

Hall A  
floorplan

# Beam test – Resources

---

- Resources needed:
  - Total 4.0 FTE, possibly:
    - Physics Division provide support at 0.5 FTE, Users redirect 1 FTE effort
    - need JLab overall support at the level of 1 FTE
    - User: need 1.5 FTE
  - Procurement: \$200 k

# Other Topics (FY22 and/or beyond) – Overview

---

- Other topics from SoLID collaboration institutions PIs:
  - Cherenkov testing and prototyping (cost saving and risk mitigation) ([Michael Paolone/New Mexico State U.](#), [Haiyan Gao, Zhiwen Zhao/Duke U.](#))
  - End-to-end simulation (recommended since Feb 2015 Director's review) ([TBD](#))
  - DAQ Streaming readout (suggested during 2021 Science Review) ([TBD](#))
- Artificial Intelligence/Machine Learning – possible multi-institution proposal responding to new AI-focused FOA in 2022.

---

# Backup Slides



# Cherenkov testing and prototyping

- Cherenkov Mirror Study
  - Pursue mirror fabrication methods to advance pre-conceptual design
    - attach reflective plastic-lexan film to polished carbon-fiber blanks, need: mirror blank testing, lexan-film adhesion and radiation hardness testing
    - alternative 3D-printing CFRP blanks
  - MAPMT and WLS coating radiation testing
  - Microchannel plate (MCP)-PMT testing
- ➔ Lead institution/PI: [New Mexico State U./Michael Paolone](#)
- Prototyping of HGC mirror mounting and testing of gas tightness for readout
  - Study how to mount large HGC mirrors of 137x33 cm for optical alignment
  - Test gas tightness for electronic readout at 1.7atm
- ➔ Lead institution/PI: [Duke U./Haiyan Gao, Zhiwen Zhao](#)

# End-to-end software

- A unified end-to-end software framework (integrating AI/ML) covering SoLID's entire life cycle is crucial to the success of the project
- Recommended since 2015 Director's Review to develop "with high priority and increased resources"
- Provide important guidance to detector design
- Focus on researching and adopting existing HEP/NP software packages
- Existing efforts cover some components below, but additional efforts are needed to choose and convert into end-to-end software
  - event generation (physics and background)
  - detector simulation (GEANT4-based)
  - signal digitization
  - data analysis and extraction of physics results

➔ Lead institution/PI: TBD

# Streaming DAQ

---

- Suggested during March 2021 Science Review
  - Tracking in high background and high rate is a large hurdle for SoLID
    - build and test a streaming version of the VMM prototype
  - simulation of event size and data processing will be performed to evaluate the amount of computing and storage resources needed
- ➔ Lead institution/PI: TBD

# Artificial Intelligence/ Machine Learning for SoLID

- AI/ML has power of recognizing patterns within vast amounts of data generally surpasses traditional methods in terms of speed and accuracy
- It is ideal for SoLID's high rate and high background at luminosity  $10^{37} - 10^{39} \text{ cm}^{-2}\text{s}^{-1}$ 
  - AI for GEM tracking, PID of combined ECal and Cherenkov, and background reduction
  - Improve efficiency and speed
  - Optimization from multiple input variables more than traditional methods can handle
- SoLID-specific AI/ML study and optimization will provide feedback to detector design
- Be an integrated part of the end-to-end software

We will utilize existing simulation tool and FTBF test data, along with new data expected from the upcoming high-rate beam test → possible multi-institution proposal responding to AI-focused FOA in 2022

## 2015 Director's Review Report:

### 1. Physics Relevance and Risks

1a. Findings: End-to-end physics simulations for the core measurements are lacking.

- Recommendations: End-to-end simulations with realistic subsystem responses and material budgets, and complete track finding and reconstruction should be developed.

1b. Findings: The SoLID simulation framework is in the beginning stages of development.

Recommendations: The development of a simulation framework with realistic reconstruction and analysis should be pursued with high priority and increased resources.

## 2021 Director's Review Report:

3. The new experimental and theoretical research efforts and technical capabilities needed to accomplish the proposed scientific program.

### Comments:

- From the presentations it was not possible to understand how far the R&D on the different detectors has been progressed to ensure the chosen technologies are able to perform to the physics requirements, especially to the occupancy expected due to the high luminosity of  $10^{37} - 10^{39} \text{ cm}^{-2}\text{s}^{-1}$