




Powersupply Big Bite

200v - 920A



Voorregeling met regeltrafo

Naregeling met transistoren










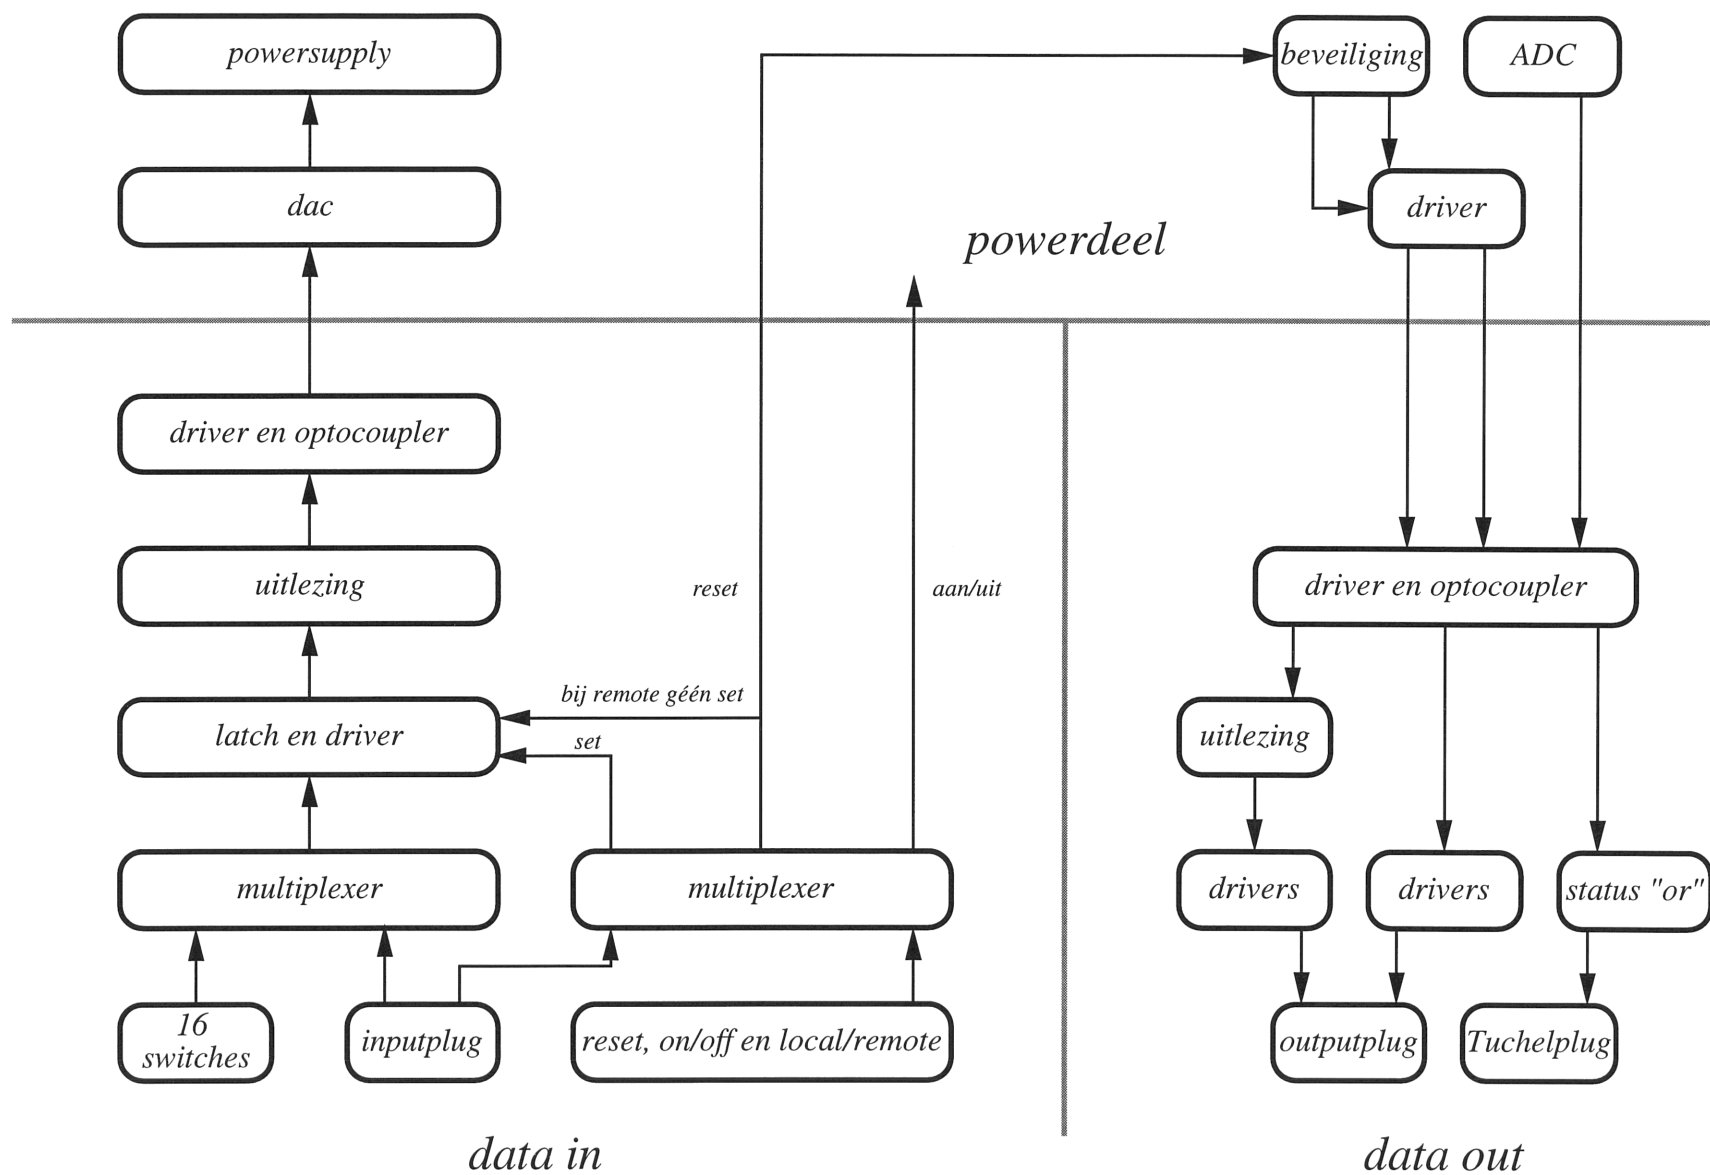


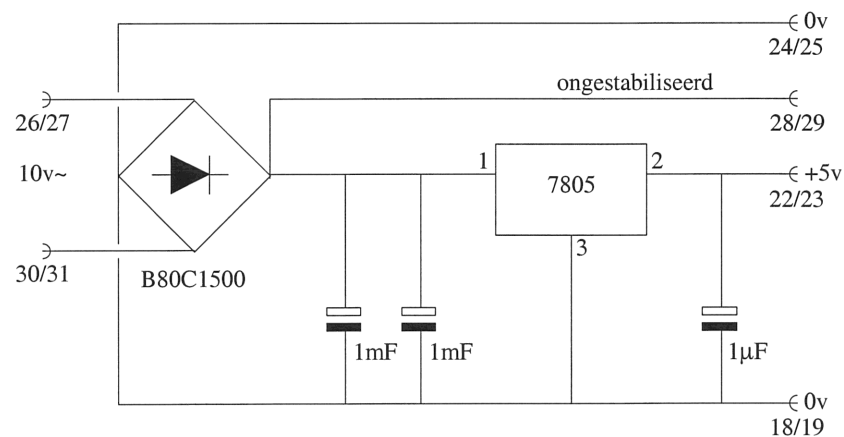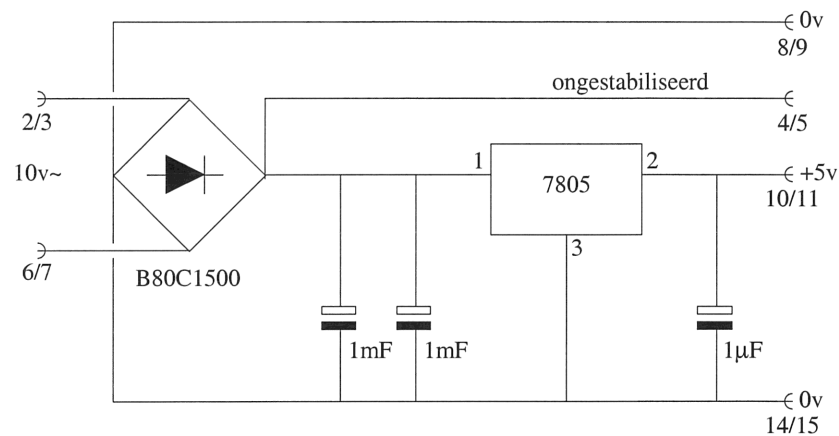



Print 1 en 9, voeding 2 x 5VDC

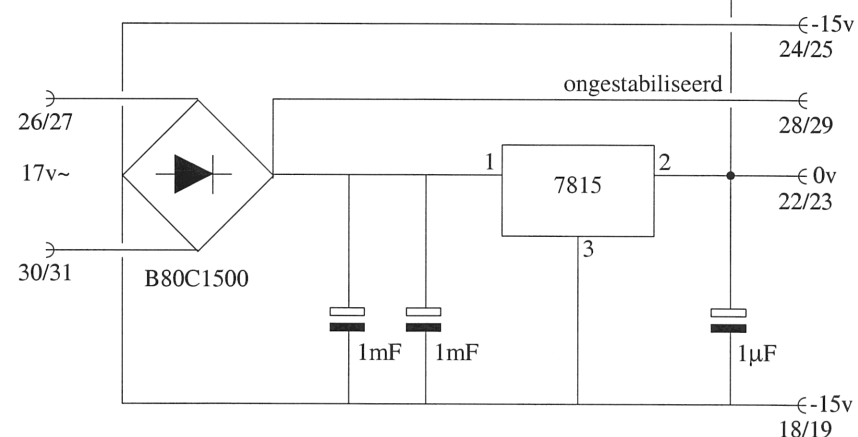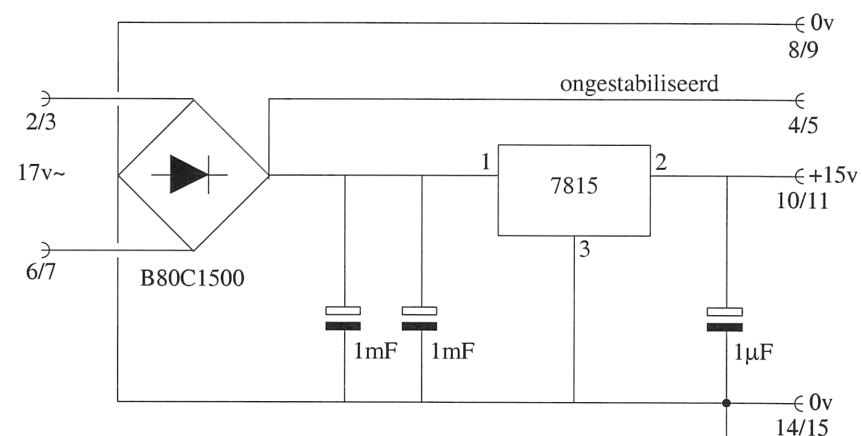


Print 10, voeding + en - 15VDC

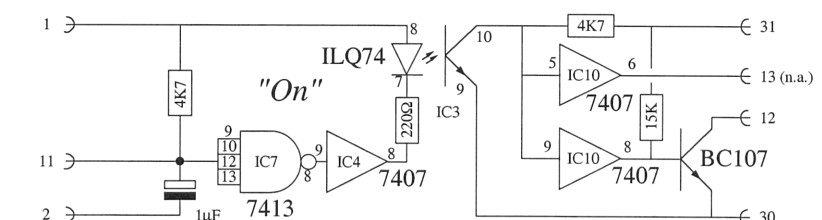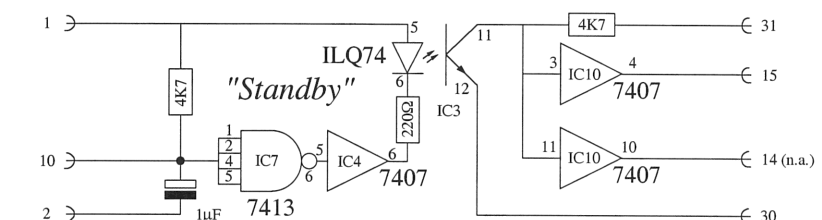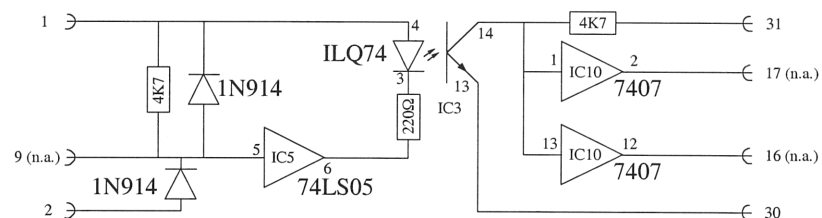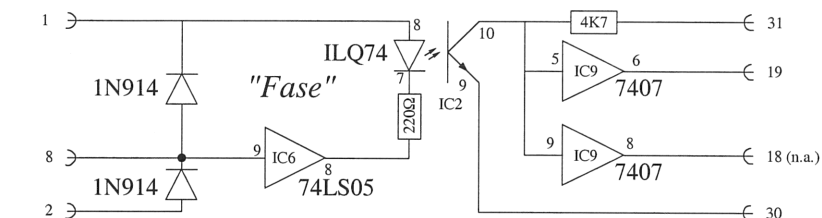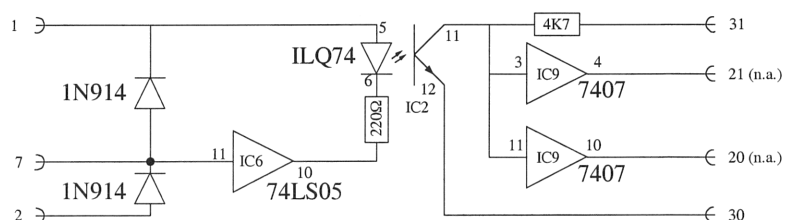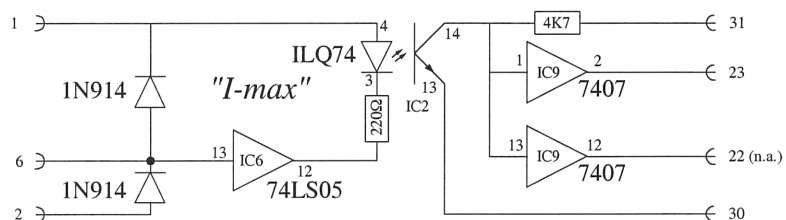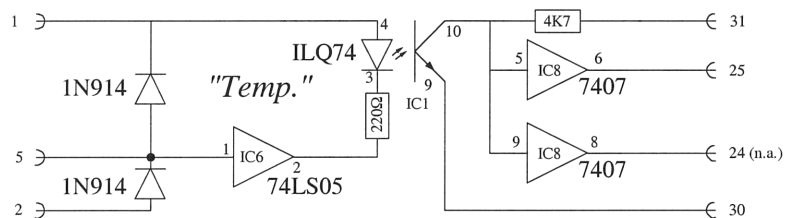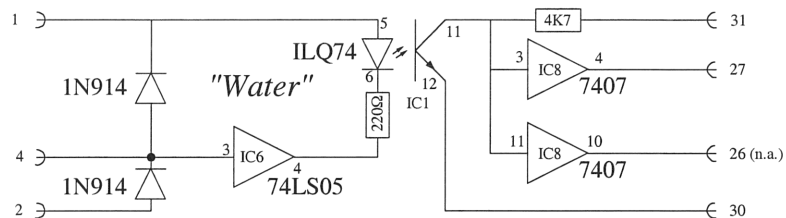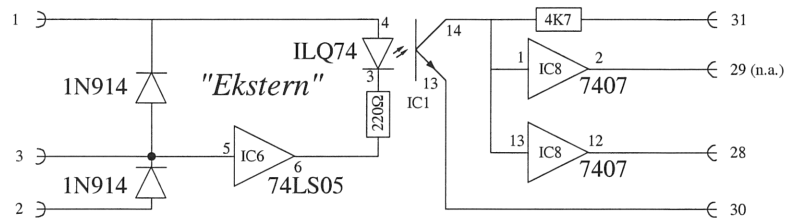

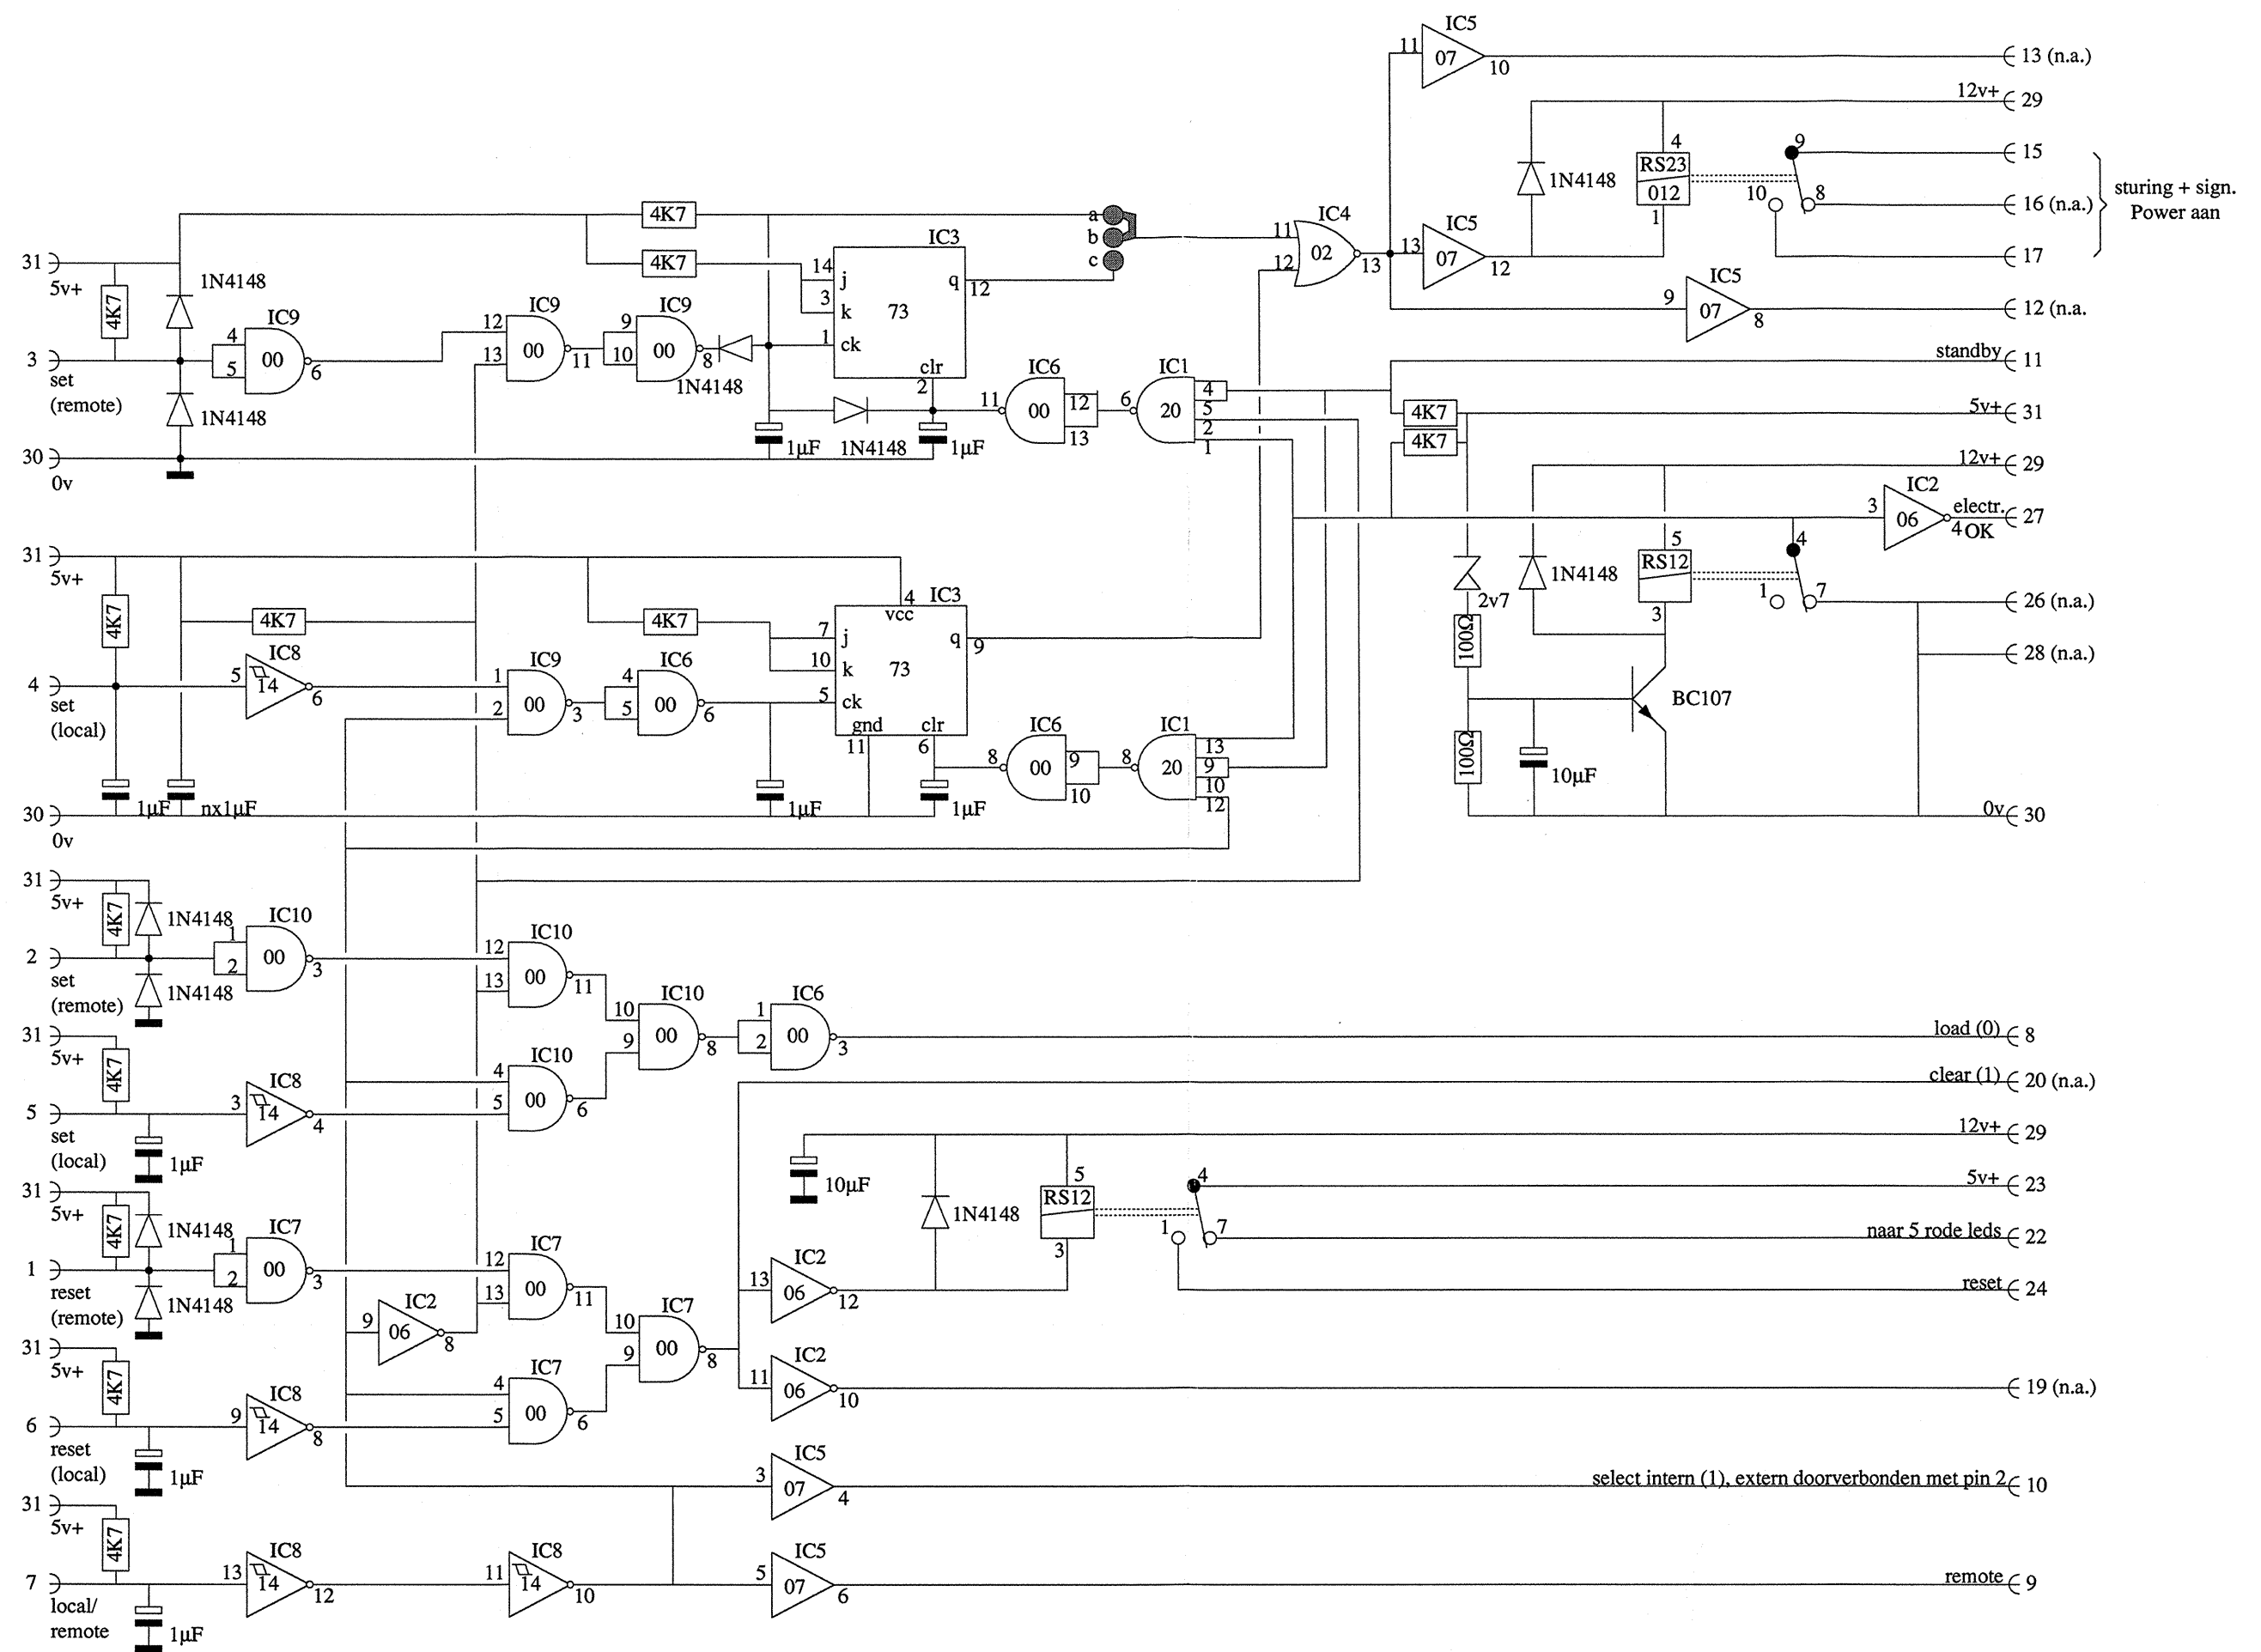

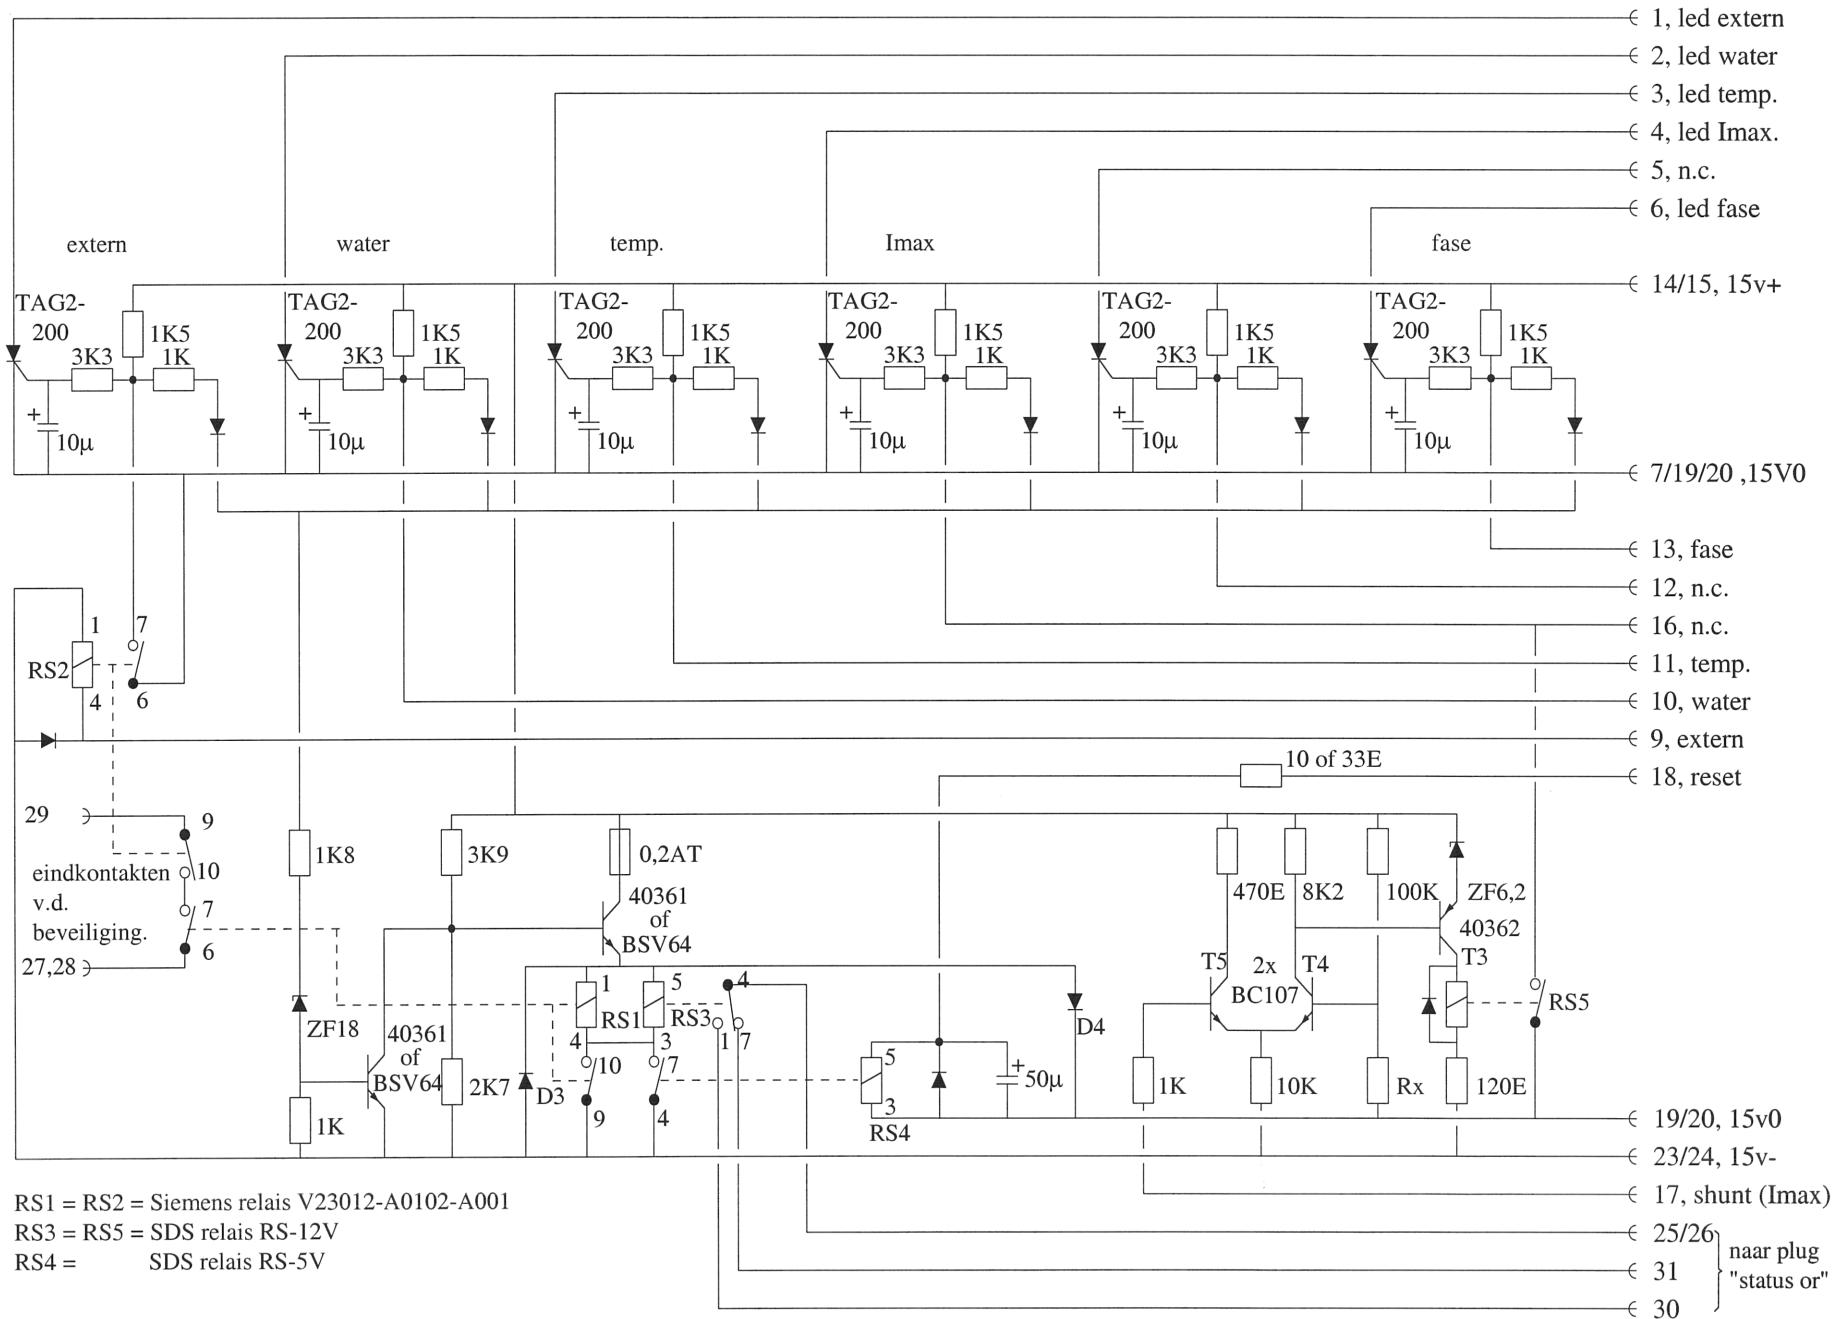



Pinnumbers Cannon Plugs


Input, 2DB 52P

PINNUMBERS



BIT NR	0v	SIGNAL	FUNCTION
0	1	2	DAC BIT 0
1	3	4	DAC BIT 1
2	5	6	DAC BIT 2
3	7	8	DAC BIT 3
4	9	10	DAC BIT 4
5	11	12	DAC BIT 5
6	13	14	DAC BIT 6
7	15	16	DAC BIT 7
8	17	18	DAC BIT 8
9	19	20	DAC BIT 9
10	21	22	DAC BIT 10
11	23	24	DAC BIT 11
12	25	26	DAC BIT 12
13	27	28	DAC BIT 13
14	29	30	DAC BIT 14
15	31	32	DAC BIT 15
16	33	34	
17	35	36	
18	37	38	
19	39	40	
20	41	42	
21	43	44	
22	45	46	ON/OFF OUTPUT POWER
23	47	48	RESET


Output, 2DB 52S


	0v	SIGNAL	
0	1	2	ADC BIT 0
1	3	4	ADC BIT 1
2	5	6	ADC BIT 2
3	7	8	ADC BIT 3
4	9	10	ADC BIT 4
5	11	12	ADC BIT 5
6	13	14	ADC BIT 6
7	15	16	ADC BIT 7
8	17	18	EXTERN OK
9	19	20	ELEKTR. OK
10	21	22	WATER OK
11	23	24	TEMP. OK
12	25	26	CURRENT OK
13	27	28	PHASE OK
14	29	30	ON
15	31	32	REMOTE

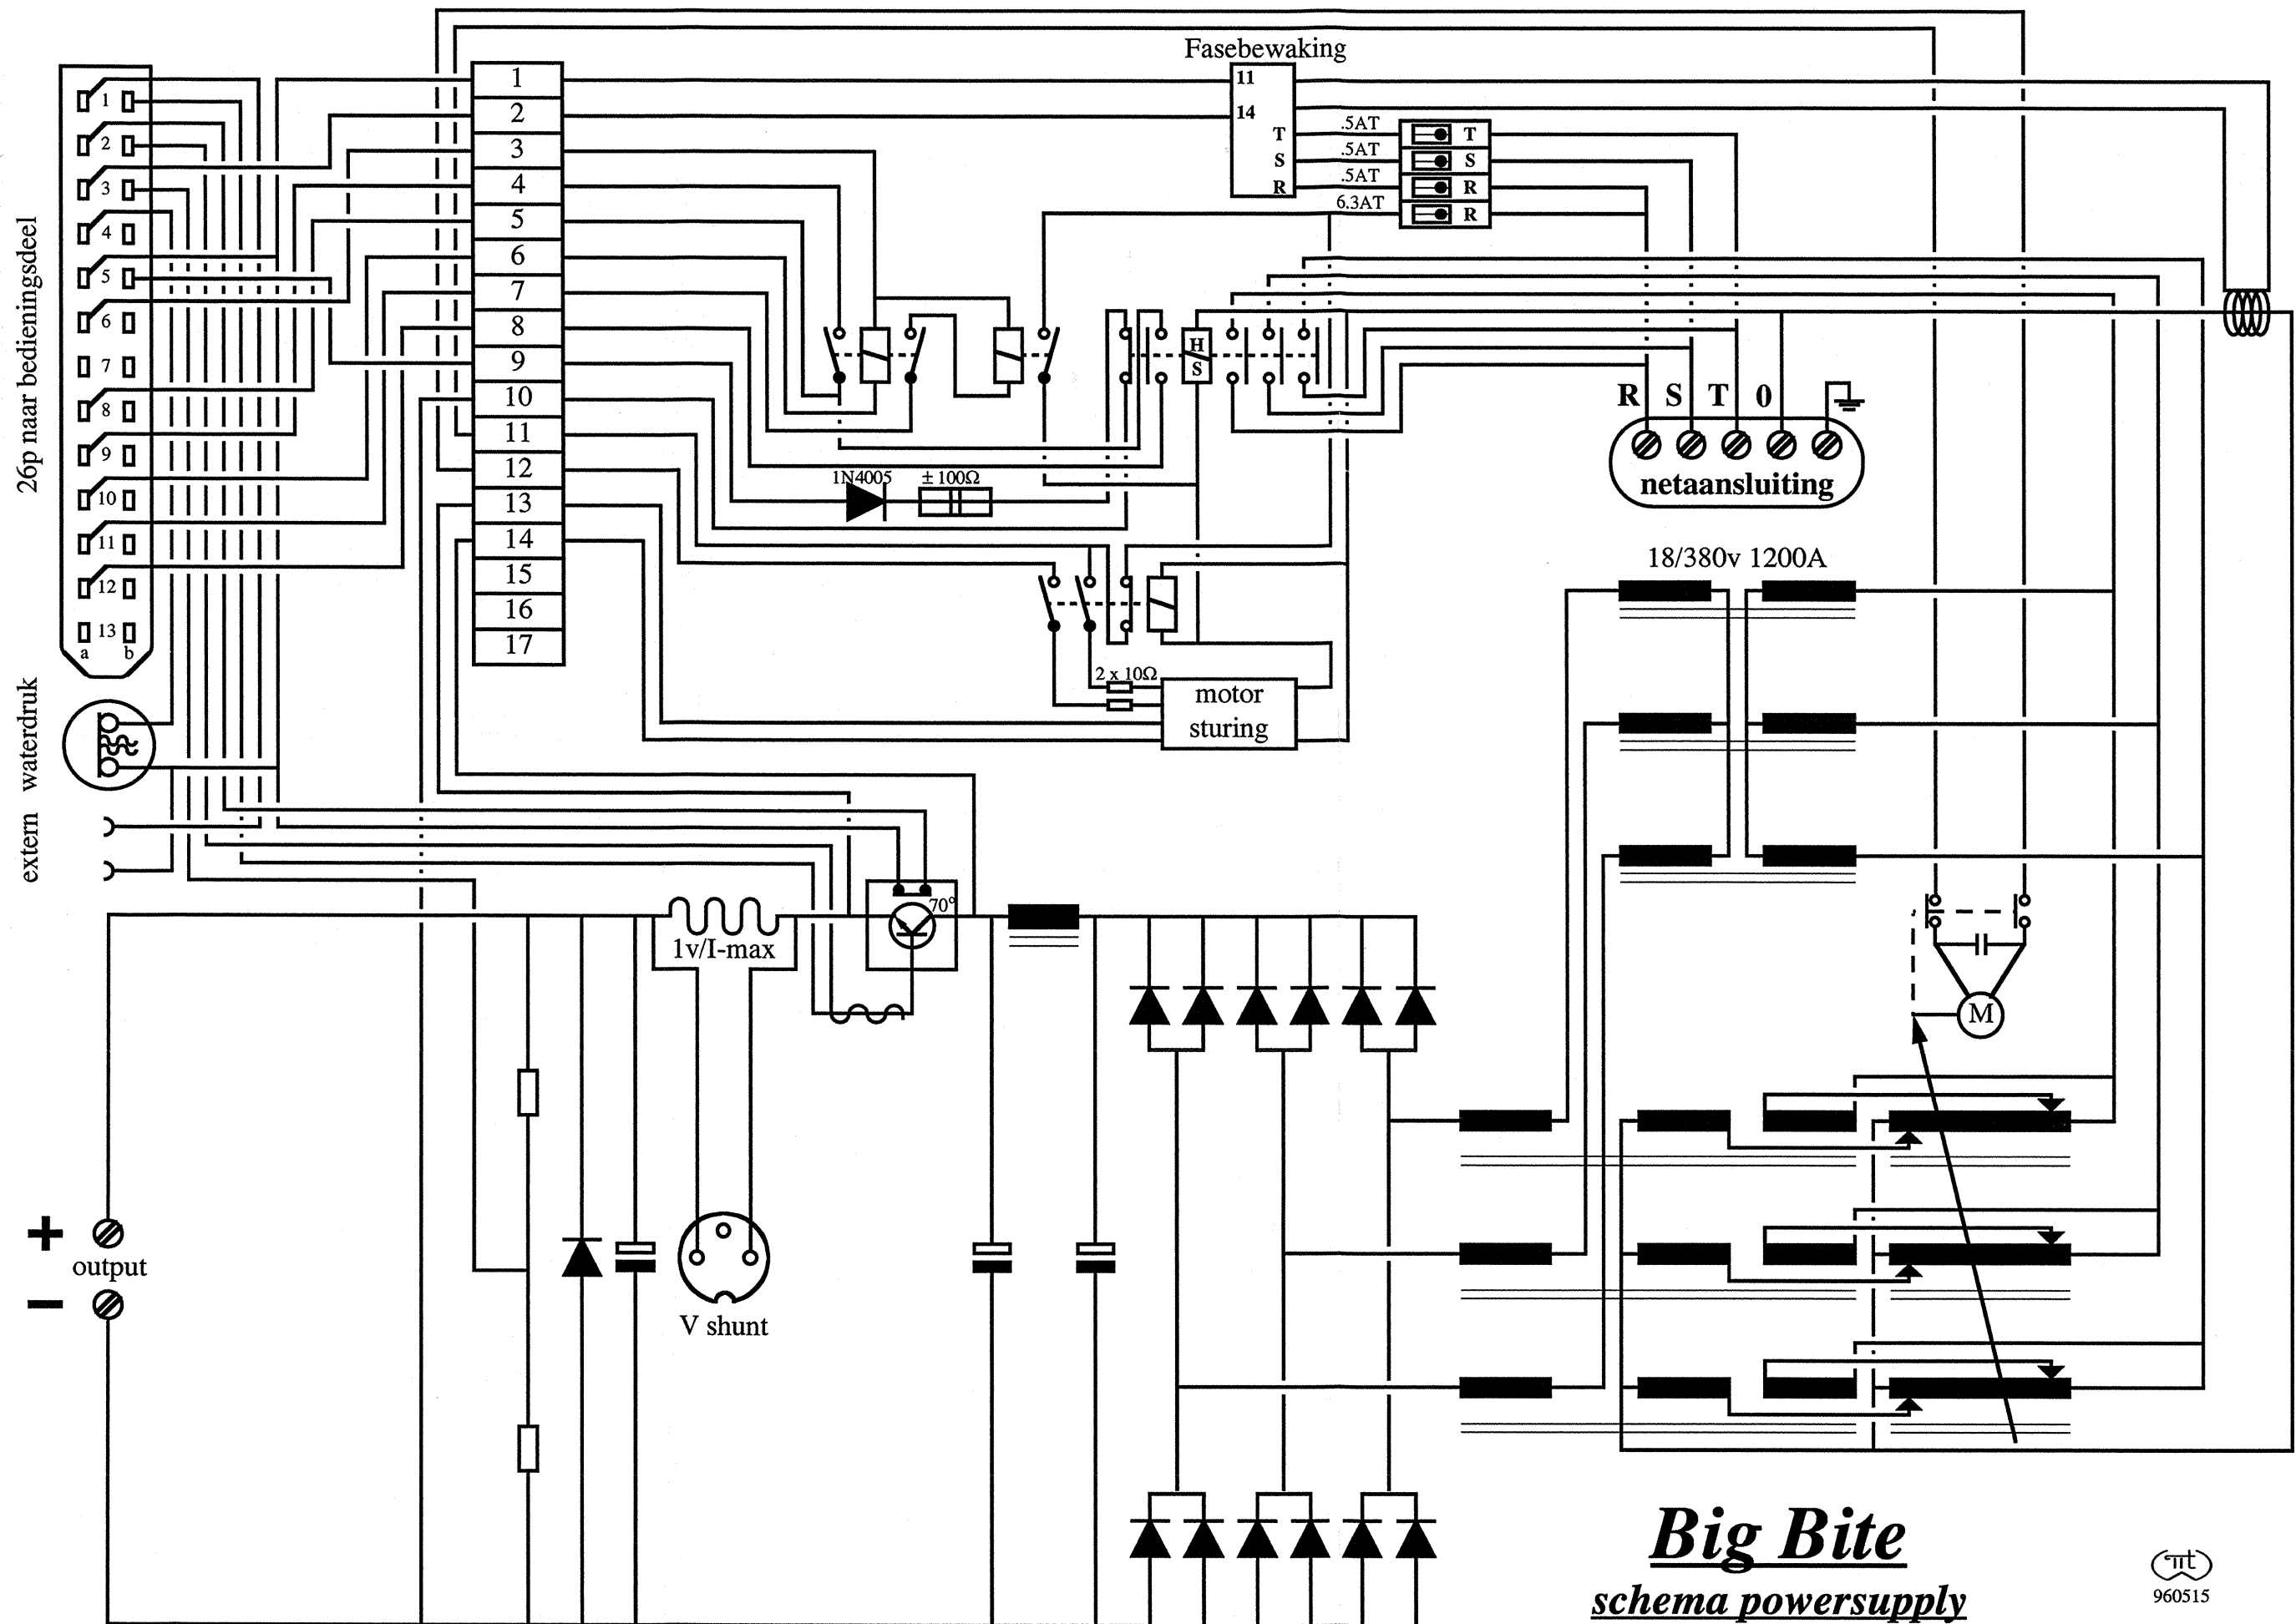

Big Bite
schema powersupply

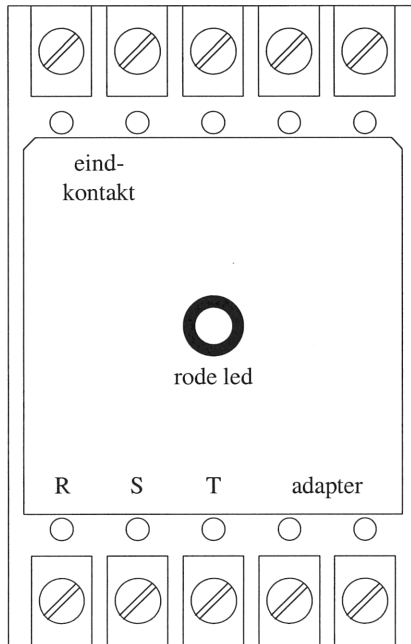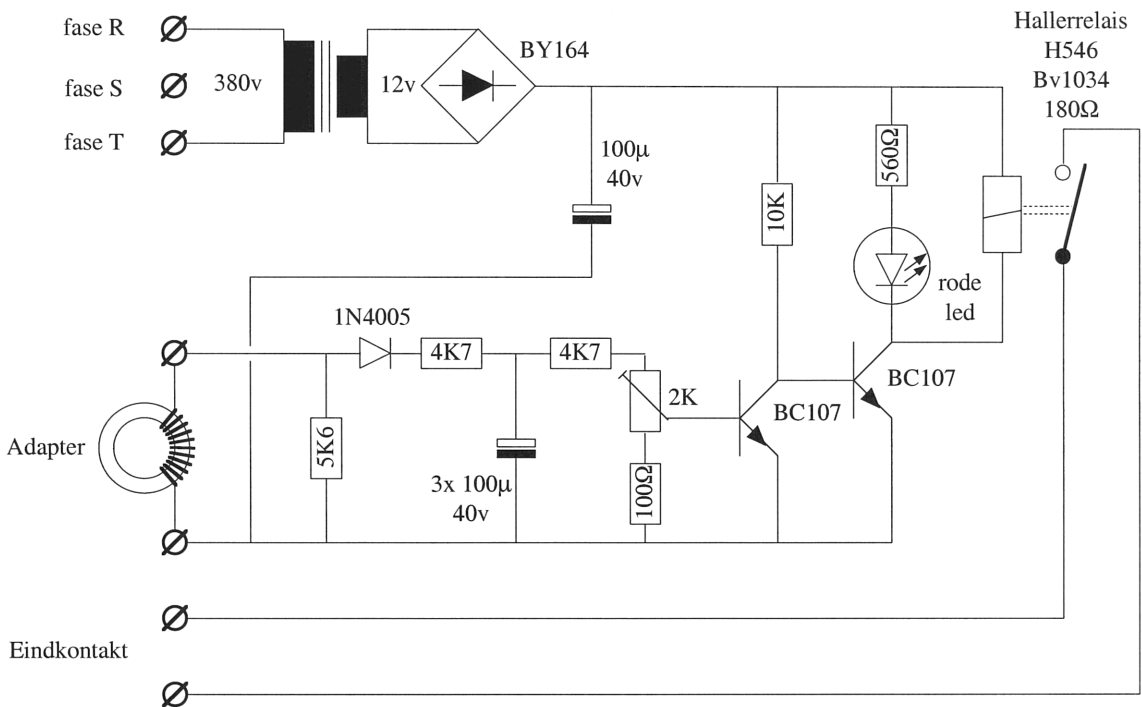

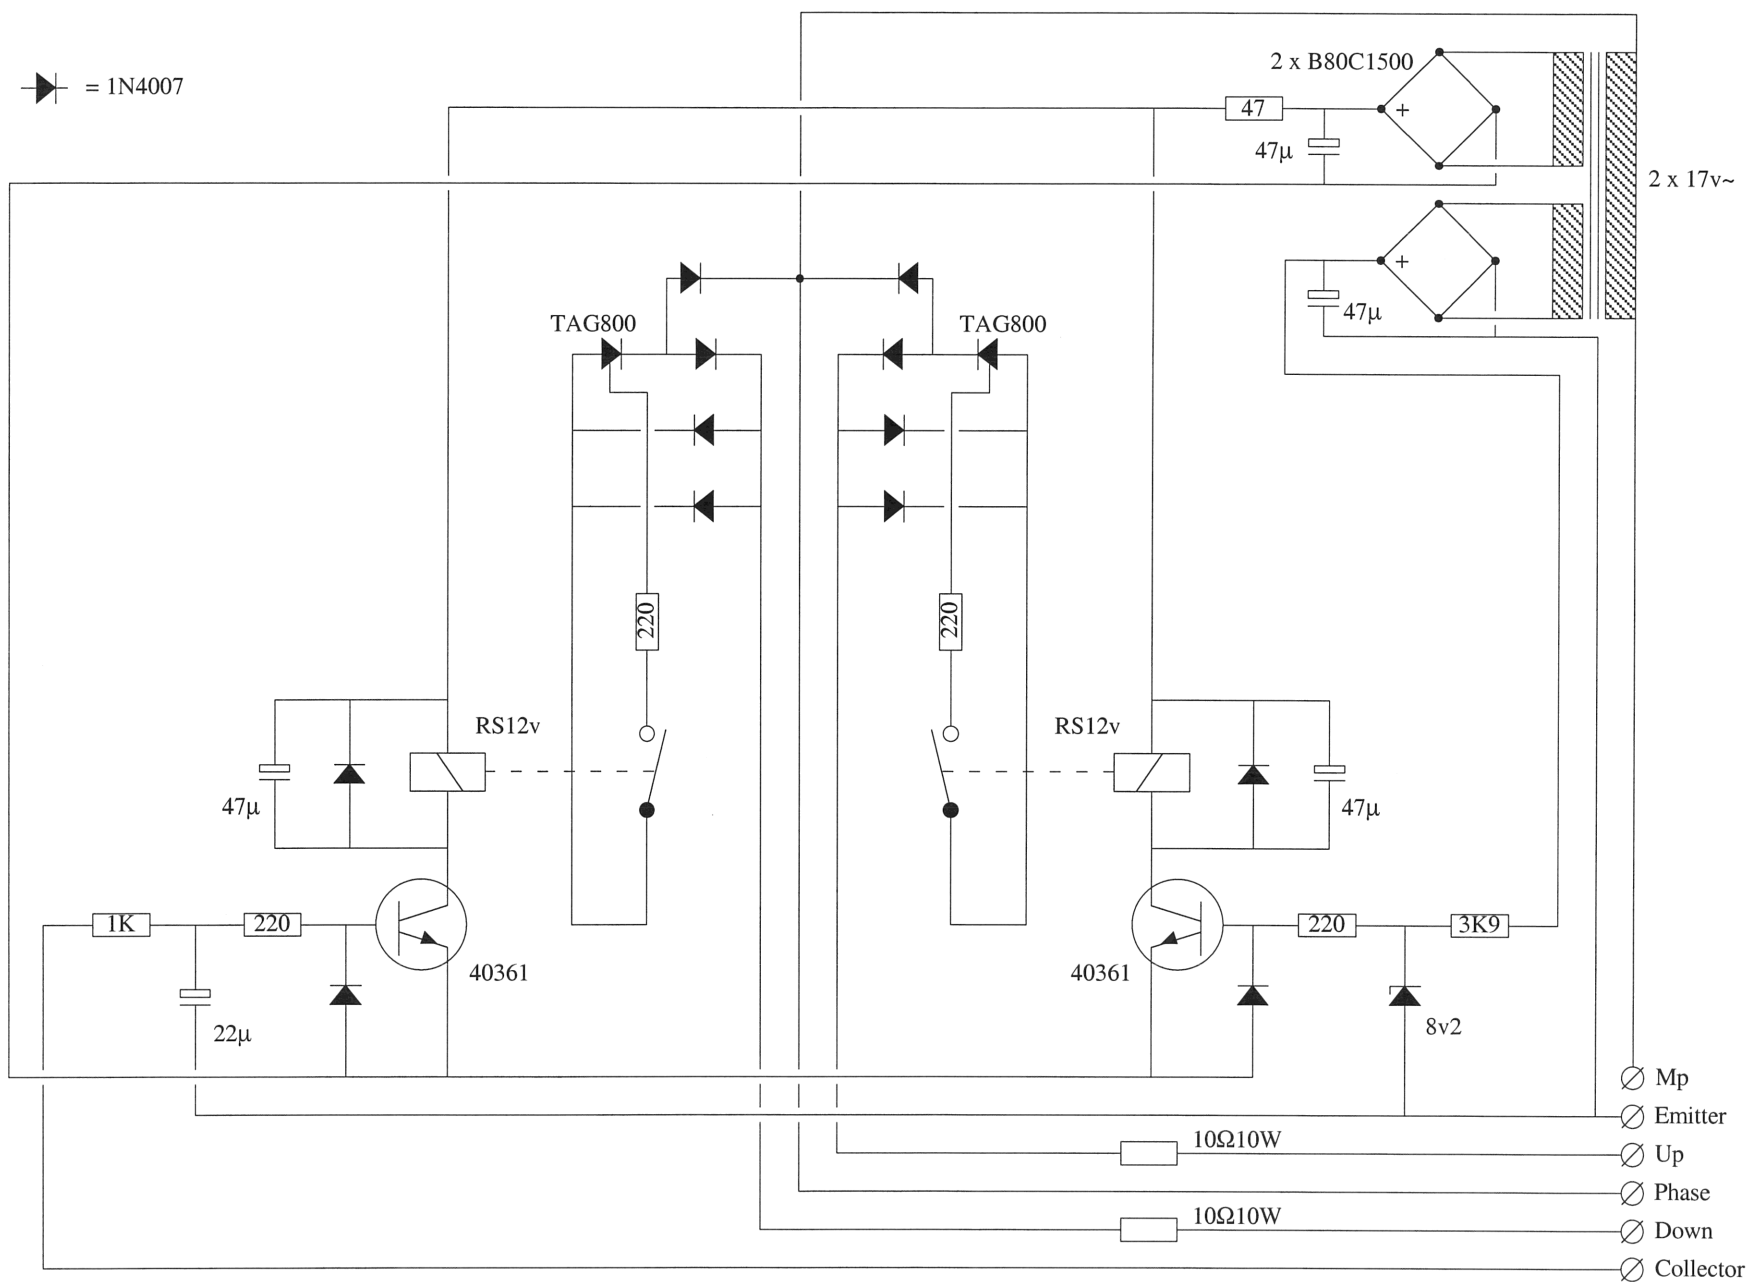

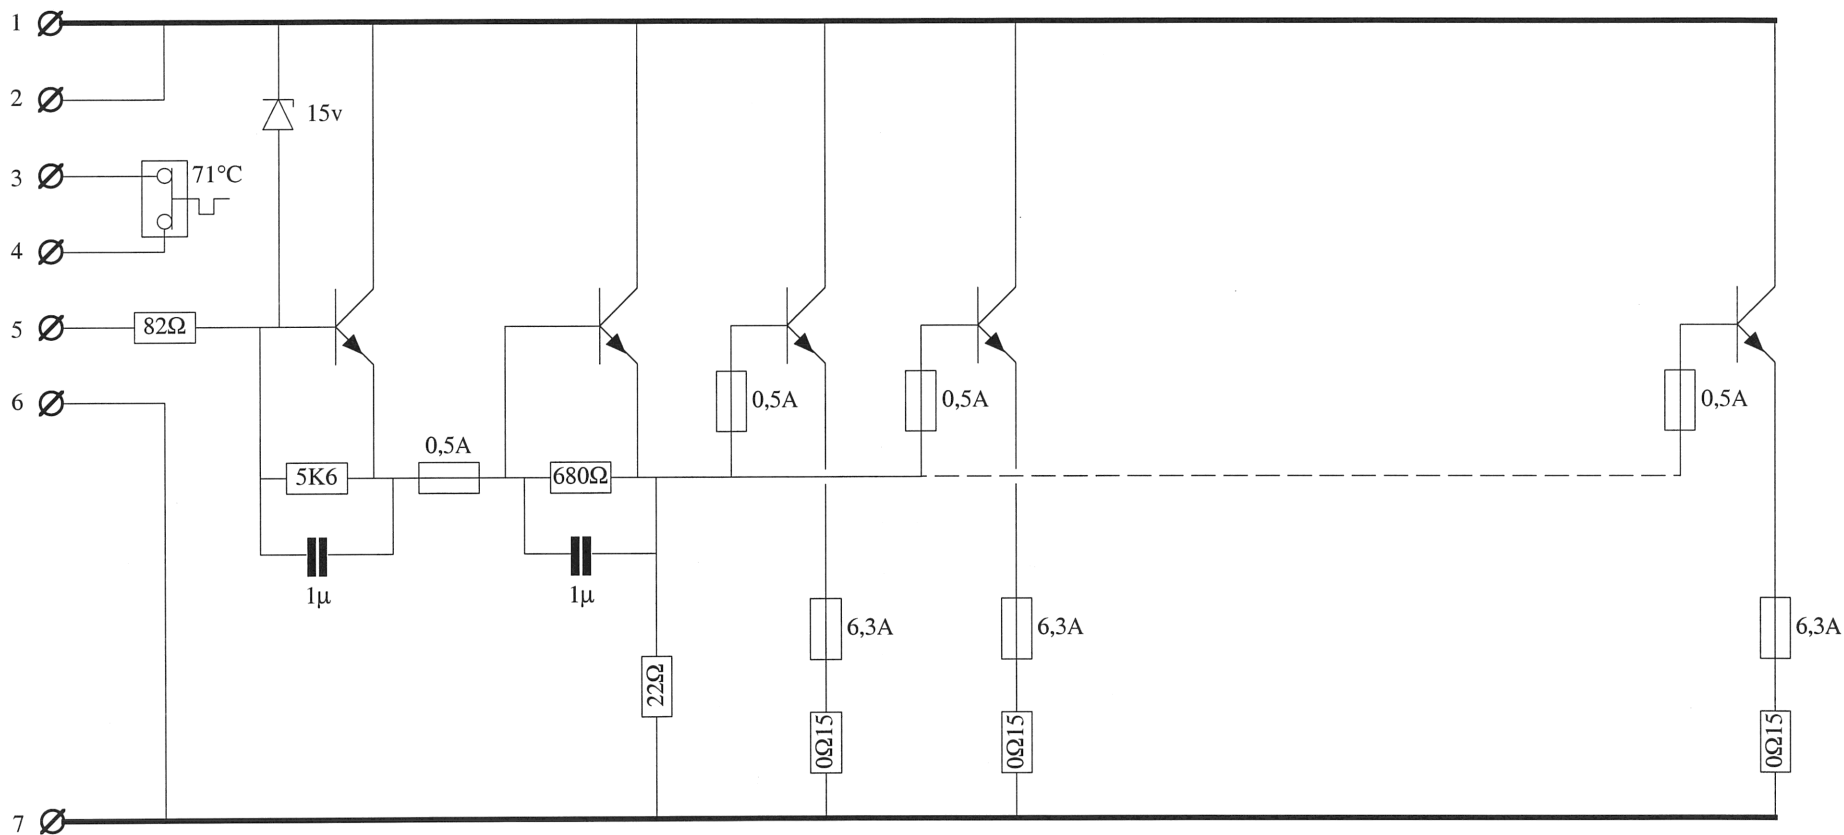

Big Bite

bordes met powersupply

(π)
950926/
991006

