


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

3/8-16 UNC-2A
VERIFY FIT THRU BEARING
DRAWING NO. 67145-B-0653

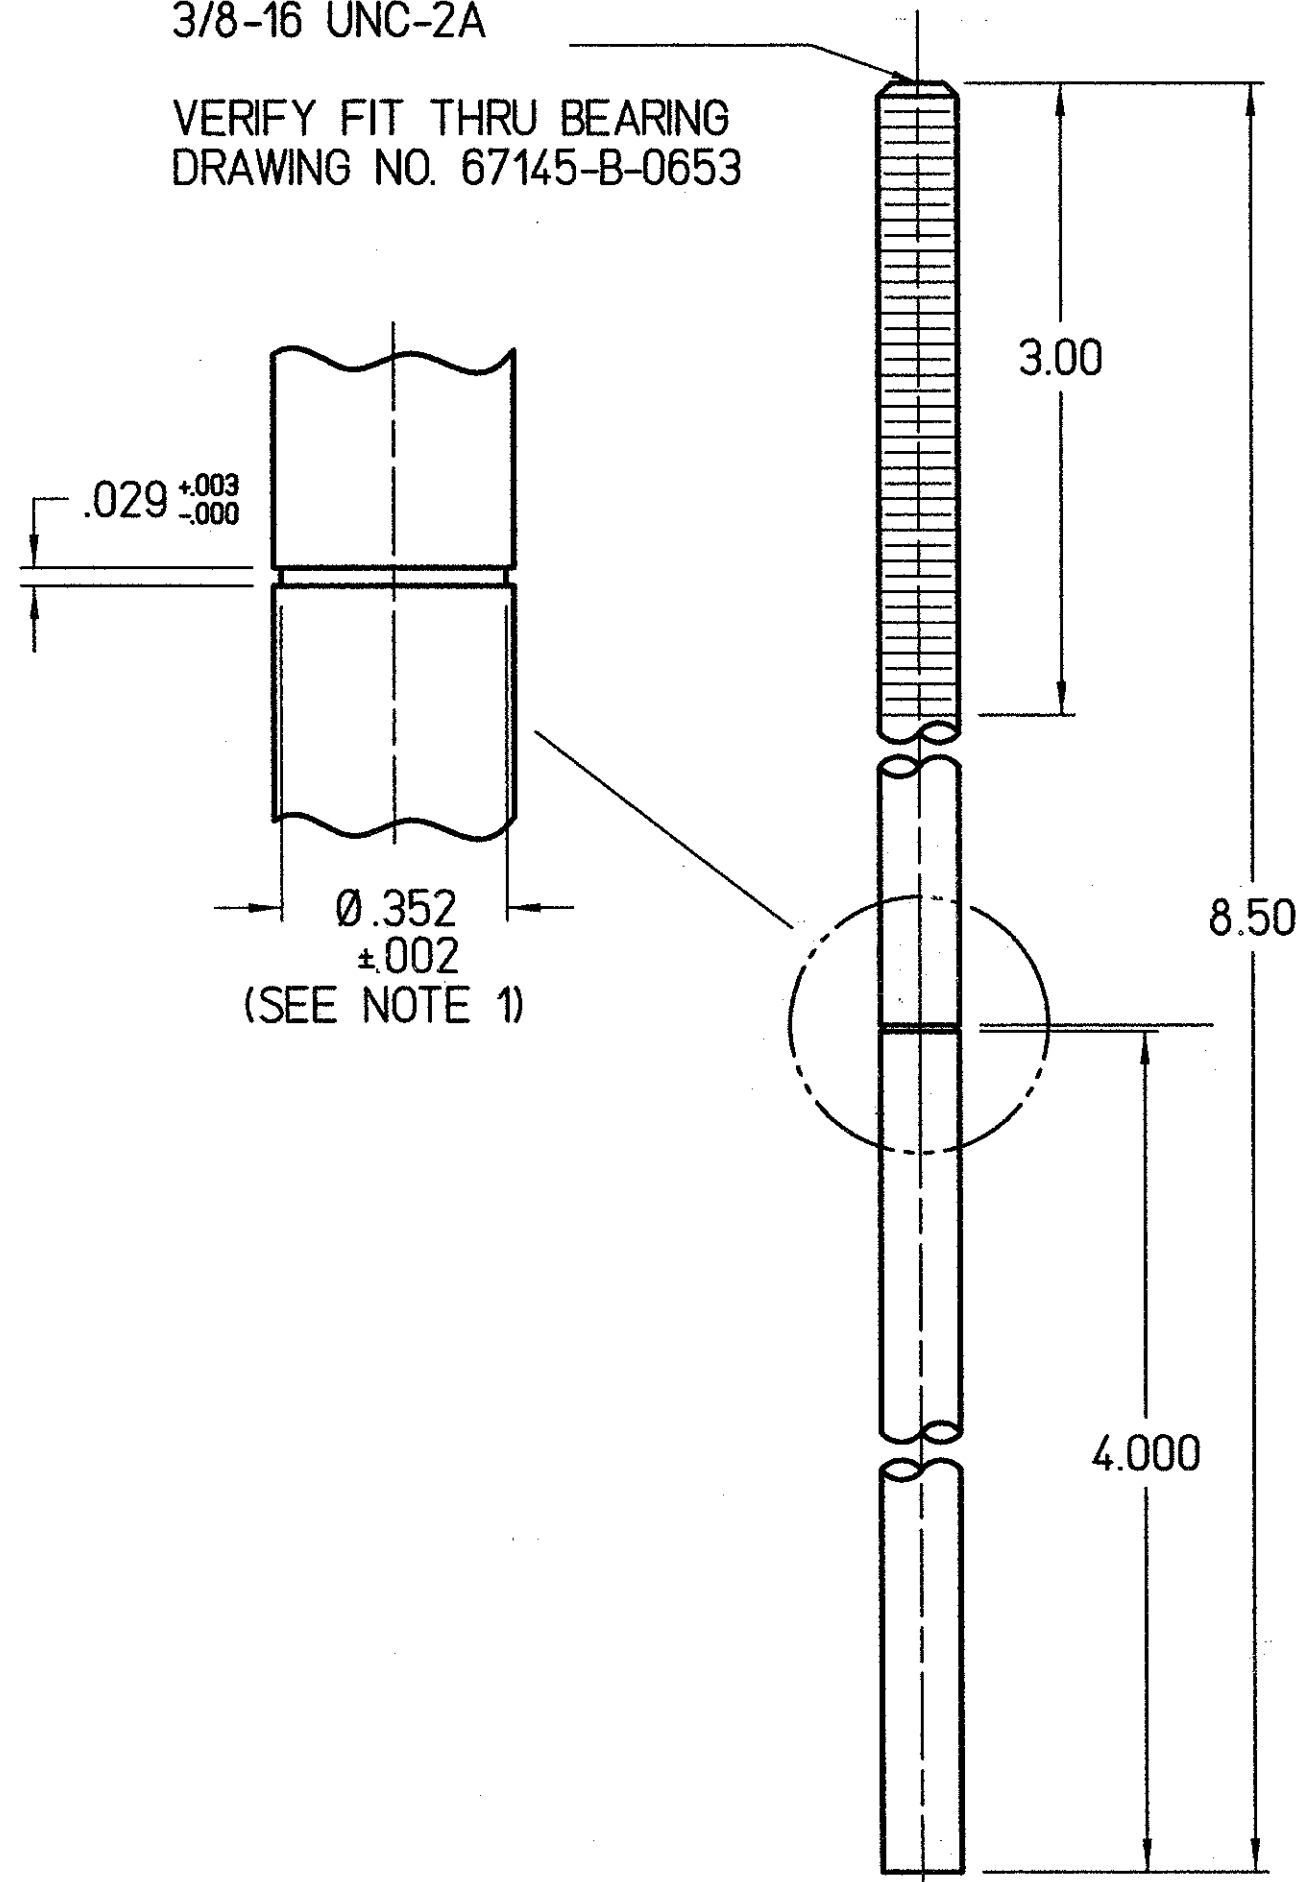

NOTES:
1.) .002 T.I.R. IS THE MAX.
ALLOWABLE DEVIATION
OF CONCENTRICITY BETWEEN
GROOVE AND SHAFT

DCG

DIM & TOL PER ANSI Y14.5 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMAL ANGLES ± N/A .XX ± .02 ± N/A .XXX ± .005	CADD I.D. NO.	Thomas Jefferson National Accelerator Facility NEWPORT NEWS, VIRGINIA UNITED STATES DEPARTMENT OF ENERGY	
MATERIAL 3/8 DIA. STNLS. STL. TYPE 304	APPROVALS	DATE	HALL C ELECTRIC VALVE ACTUATOR GUIDE ROD
	DRAWN FOWLER	04/28/09	
FINISH N/A UNLESS OTHERWISE NOTED DEBURR & BREAK ALL SHARP EDGES	CHECKED B. G. H.	5/13/09	SIZE DWG. NO. B 67145-B-0655
	APPROVED [Signature]	5/13/09	
DO NOT SCALE DRAWING	APPROVED G. P.	5/13/09	USED ON ASSY NO. 67145-C-0651
			SHEET 1 OF 1