

Input and Output Characteristics of Digital Integrated Circuits

SDYA010
November 1996



IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.

Contents

	<i>Page</i>
Abstract	1
1 Introduction	1
Acknowledgment	2
2 Input Characteristics	3
Figure 1. Input Characteristics of the SN7400	3
Figure 2. Input Characteristics of the SN7440	3
Figure 3. Input Characteristics of the SN74LS00	3
Figure 4. Input Characteristics of the SN74LS40	4
Figure 5. Input Characteristics of the SN74LS240	4
Figure 6. Input Characteristics of the SN74S00	4
Figure 7. Input Characteristics of the SN74S40	5
Figure 8. Input Characteristics of the SN74S240	5
Figure 9. Input Characteristics of the SN74ALS00	5
Figure 10. Input Characteristics of the SN74ALS40	6
Figure 11. Input Characteristics of the SN74ALS240	6
Figure 12. Input Characteristics of the SN74ALS1004	6
Figure 13. Input Characteristics of the SN74AS00	7
Figure 14. Input Characteristics of the SN74AS240	7
Figure 15. Input Characteristics of the SN74AS1004	7
Figure 16. Input Characteristics of the SN74F00	8
Figure 17. Input Characteristics of the SN74F40	8
Figure 18. Input Characteristics of the SN74F240	8
Figure 19. Input Characteristics of the SN74HC00	9
Figure 20. Input Characteristics of the SN74HC240	9
Figure 21. Input Characteristics of the SN74AC11240	9
Figure 22. Input Characteristics of the SN74BCT240	10
Figure 23. Input Characteristics of the SN74BCT25240	10
Figure 24. Input Characteristics of the SN74ABT240	10
Figure 25. Input Characteristics of the SN74LV00	11
Figure 26. Input Characteristics of the SN74LV244	11
Figure 27. Input Characteristics of the SN74LVC244	11
Figure 28. Input Characteristics of the SN74ALVC16244	12
Figure 29. Input Characteristics of the SN74LVT244	12

Contents (continued)

	<i>Title</i>	<i>Page</i>
3	Output Characteristics	13
	Figure 30. Output Characteristics of the SN7400	13
	Figure 31. Output Characteristics of the SN7440	13
	Figure 32. Output Characteristics of the SN74LS00	13
	Figure 33. Output Characteristics of the SN74LS40	14
	Figure 34. Output Characteristics of the SN74LS240	14
	Figure 35. Output Characteristics of the SN74S00	14
	Figure 36. Output Characteristics of the SN74S40	15
	Figure 37. Output Characteristics of the SN74S240	15
	Figure 38. Output Characteristics of the SN74ALS00	15
	Figure 39. Output Characteristics of the SN74ALS40	16
	Figure 40. Output Characteristics of the SN74ALS240	16
	Figure 41. Output Characteristics of the SN74ALS1004	16
	Figure 42. Output Characteristics of the SN74AS00	17
	Figure 43. Output Characteristics of the SN74AS240	17
	Figure 44. Output Characteristics of the SN74AS1004	17
	Figure 45. Output Characteristics of the SN74F00	18
	Figure 46. Output Characteristics of the SN74F40	18
	Figure 47. Output Characteristics of the SN74F240	18
	Figure 48. Output Characteristics of the SN74HC00	19
	Figure 49. Output Characteristics of the SN74HC240	19
	Figure 50. Output Characteristics of the SN74AC11240	19
	Figure 51. Output Characteristics of the SN74BCT240	20
	Figure 52. Output Characteristics of the SN74BCT25240	20
	Figure 53. Output Characteristics of the SN74ABT240	20
	Figure 54. Output Characteristics of the SN74LV00	21
	Figure 55. Output Characteristics of the SN74LV244	21
	Figure 56. Output Characteristics of the SN74LVC244	21
	Figure 57. Output Characteristics of the SN74ALVC16244	22
	Figure 58. Output Characteristics of the SN74LVT244	22

Contents (continued)

	<i>Title</i>	<i>Page</i>
4	Output Waveforms	23
	Figure 59. Setup for Obtaining Output Waveforms	23
	Figure 60. Waveforms of the SN7400	23
	Figure 61. Waveforms of the SN7440	23
	Figure 62. Waveforms of the SN74LS00	24
	Figure 63. Waveforms of the SN74LS40	24
	Figure 64. Waveforms of the SN74LS240	24
	Figure 65. Waveforms of the SN74S00	25
	Figure 66. Waveforms of the SN74S40	25
	Figure 67. Waveforms of the SN74S240	25
	Figure 68. Waveforms of the SN74ALS00	26
	Figure 69. Waveforms of the SN74ALS40	26
	Figure 70. Waveforms of the SN74ALS240	26
	Figure 71. Waveforms of the SN74ALS1004	27
	Figure 72. Waveforms of the SN74AS00	27
	Figure 73. Waveforms of the SN74AS240	27
	Figure 74. Waveforms of the SN74AS1004	28
	Figure 75. Waveforms of the SN74F00	28
	Figure 76. Waveforms of the SN74F40	28
	Figure 77. Waveforms of the SN74F240	29
	Figure 78. Waveforms of the SN74HC00	29
	Figure 79. Waveforms of the SN74HC240	29
	Figure 80. Waveforms of the SN74AC11240	30
	Figure 81. Waveforms of the SN74BCT240	30
	Figure 82. Waveforms of the SN74BCT25240	30
	Figure 83. Waveforms of the SN74ABT240	31
	Figure 84. Waveforms of the SN74LV00	31
	Figure 85. Waveforms of the SN74LV244	31
	Figure 86. Waveforms of the SN74LVC244	32
	Figure 87. Waveforms of the SN74ALVC16244	32
	Figure 88. Waveforms of the SN74LVT244	32

Abstract

This report contains a comprehensive collection of the input and output characteristic curves of typical integrated circuits from various logic families. These curves go beyond the information given in data sheets by providing additional details regarding the characteristics of the components. This knowledge is particularly useful when, for example, a decision must be made as to which circuit should be used in a bus system, or when the waveforms that can be expected in a transmission system need to be predicted by using a Bergeron chart. In addition, the waveforms at the outputs of these components are shown when loaded with a $50\text{-}\Omega$ coaxial line, which is open circuited at the end of the line. These oscillograms are of great assistance when generating models for simulation programs that analyze the dynamic behavior of the integrated circuits in a particular environment.

1 Introduction

The parameters given in the data sheets of integrated circuits can give only a limited indication of their actual behavior in a system. Data sheets generally give only information regarding the behavior over an input and output voltage range of 0 to 5 volts. The output currents specified over this range provide an incomplete picture of the actual performance that can be expected from the device. Often the behavior outside the usually accepted operating conditions is of interest. This is, for example, the situation when the characteristic curves need to be used to predict the signal waveforms resulting from line reflections.

For requirements of this kind, the most important input and output characteristic curves of logic circuits are shown in the figures that follow. In view of the wide range of integrated circuits that are available, it has been necessary to limit this information to typical characteristics only. As a result, the input and output characteristics of the following circuits have been shown as being representative of other components which have similar circuit behavior:

- '00: The characteristic curves of this NAND gate are representative of all logic circuits having normal drive capability, such as gates, flip-flops, counters, multiplexers, etc.
- '40: For a range of applications, gates are available in several logic families that have increased drive capability. Such components can supply about three times the output current, when compared with the normal drive-capability logic circuits mentioned above.
- '1004: A special group of driver circuits was introduced into the ALS and AS family for applications requiring a very large output current. These components play a significant role in clock distribution systems.
- '240: The output characteristics of these bus interface circuits are of particular importance when a decision must be made as to which circuit family should be used for a specific system requirement. The available output current has a decisive influence on the distortion of signals on bus lines.
- '25240: The incident-wave-switching (IWS) driver was developed to meet the requirements imposed by fast bus systems and applications with exceptionally low-resistance lines. Since these components play a significant role in applications of this kind, their input and output characteristics have been included.

Table 1 provides an overall view of the input and output characteristics curves shown on the following pages.

Table 1. Typical Output Types in the Various Logic Families

FAMILY	TYPE				
	'00	'40	'240	'1004	'25240
SN74	✓	✓			
SN74LS	✓	✓	✓		
SN74S	✓	✓	✓		
SN74ALS	✓	✓	✓	✓	
SN74AS	✓		✓	✓	
SN74F	✓	✓	✓		
SN74HC	✓		✓		
SN74AC			✓†		
SN74BCT			✓		✓
SN74ABT			✓		
SN74LV	✓		✓		
SN74LVC			✓		
SN74ALCV			✓‡		
SN74LVT			✓		

† With the AC family, the device type is SN74AC11240.

‡ With the ALVC family, only the Widebus™ function SN74ALVC16240 is available.

Waveforms at the outputs of the integrated circuits in the above table are shown in Figures 60 through 88. For these measurements, the devices under test were loaded with a 1.3-m coaxial cable having a characteristic impedance of 50 Ω ; the end of the line was open circuit. These waveforms provide good insight into the dynamic behavior of the components. In particular, the oscillograms provide information regarding drive capability with a low-resistance load, together with an indication of the line reflections that can be expected.

Acknowledgment

The author of this document is Peter Forstner.

2 Input Characteristics

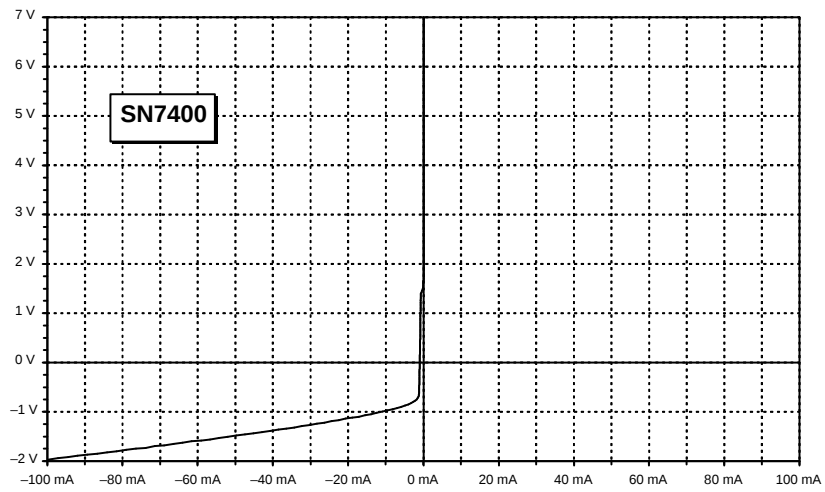


Figure 1. Input Characteristics of the SN7400

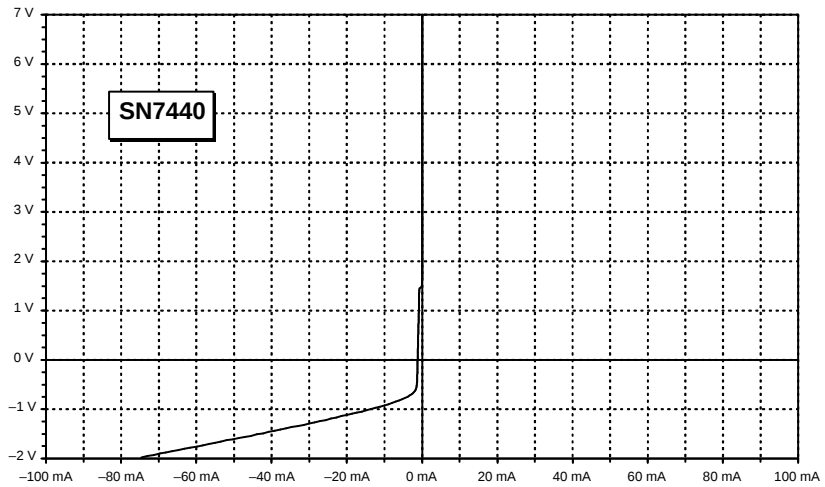


Figure 2. Input Characteristics of the SN7440

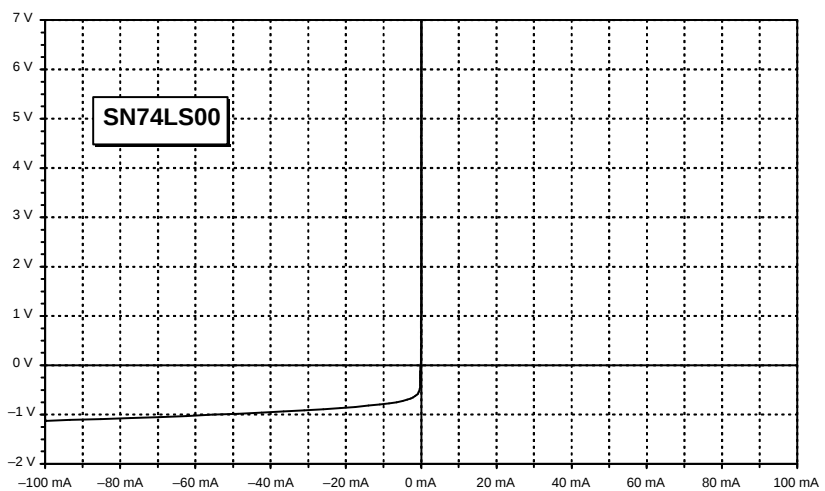


Figure 3. Input Characteristics of the SN74LS00

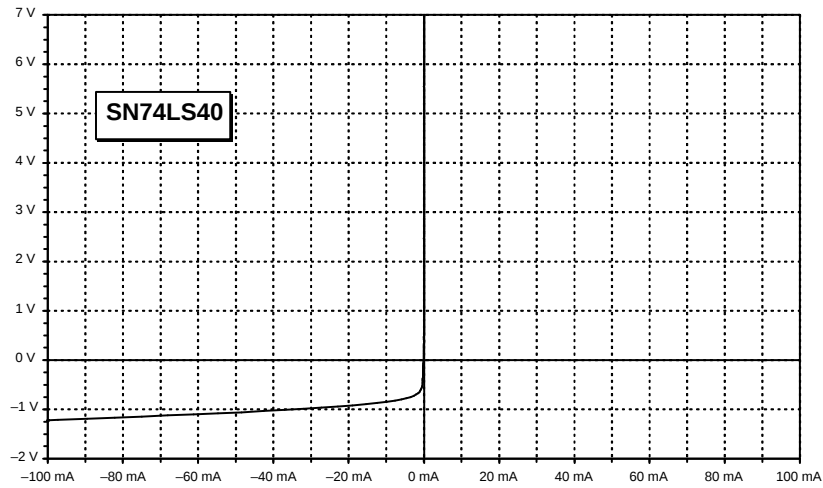


Figure 4. Input Characteristics of the SN74LS40

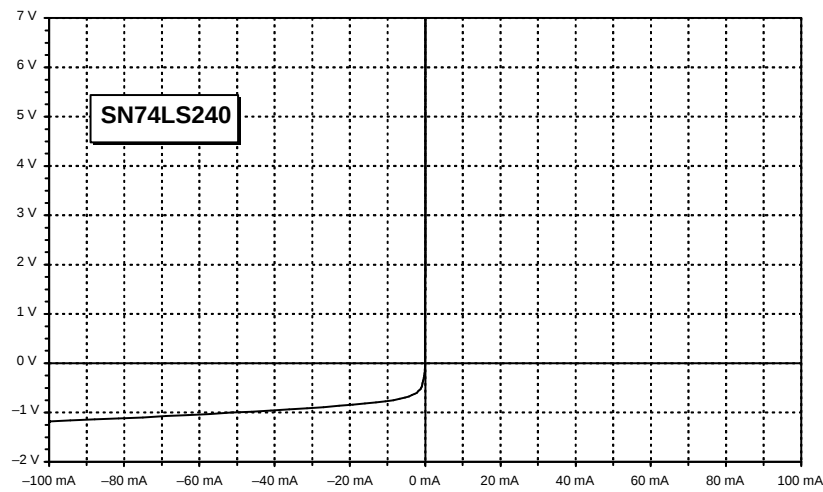


Figure 5. Input Characteristics of the SN74LS240

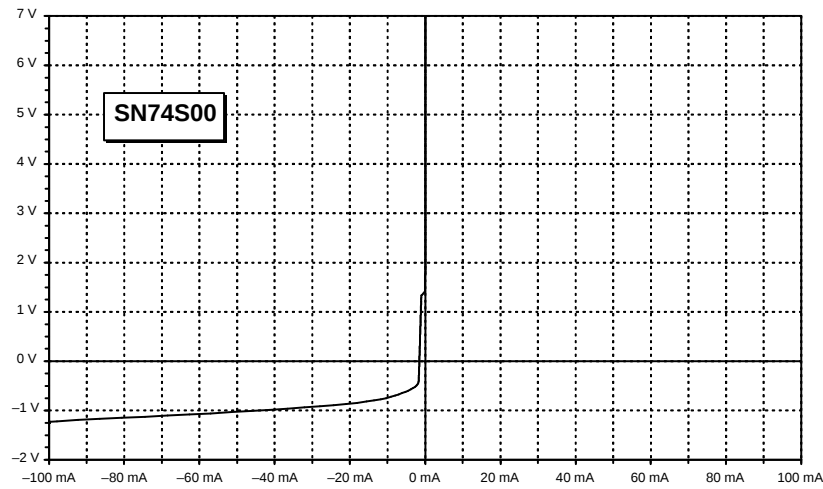


Figure 6. Input Characteristics of the SN74S00

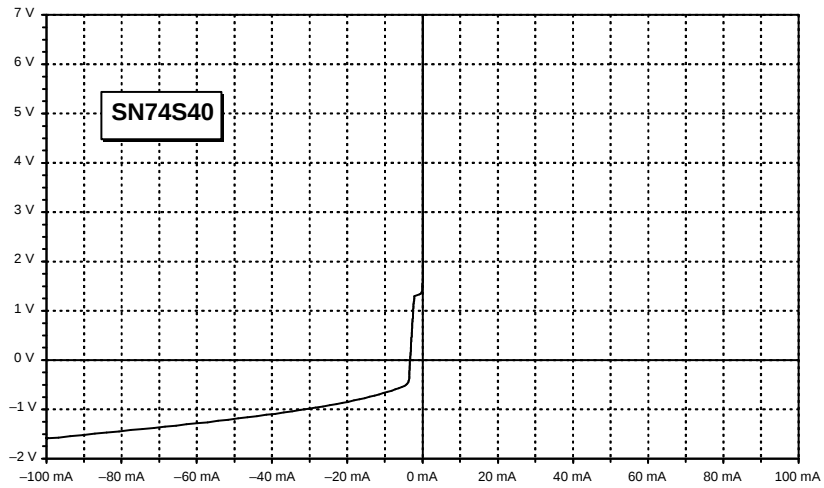


Figure 7. Input Characteristics of the SN74S40

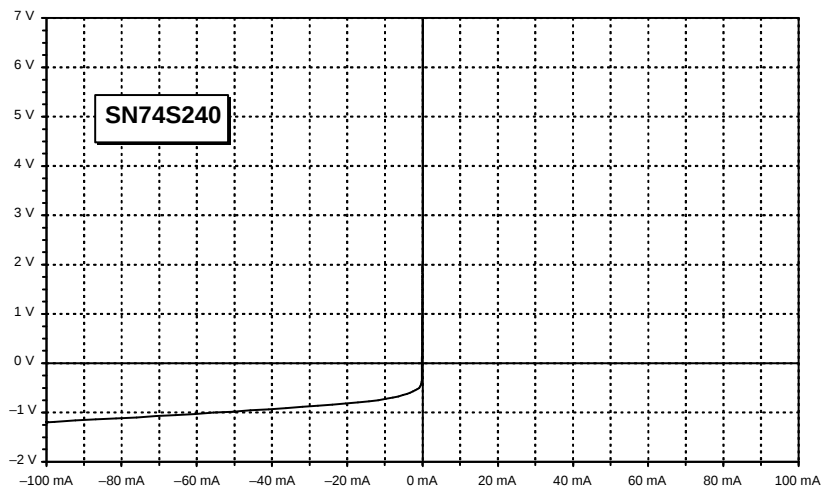


Figure 8. Input Characteristics of the SN74S240

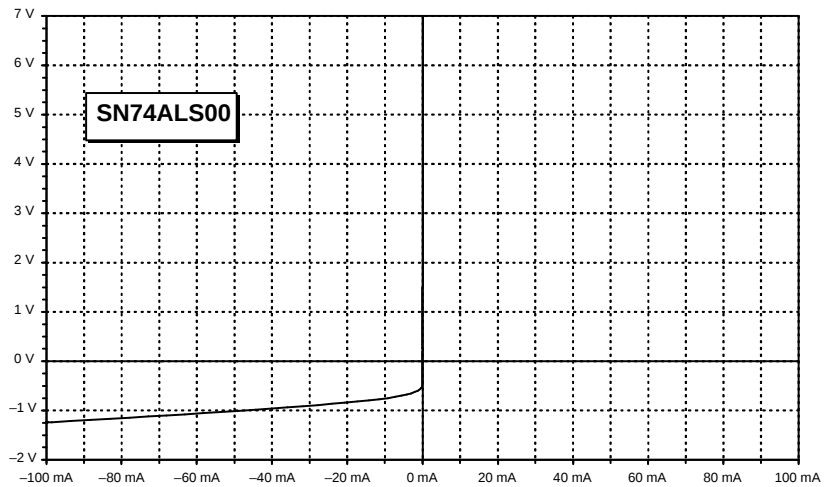


Figure 9. Input Characteristics of the SN74ALS00

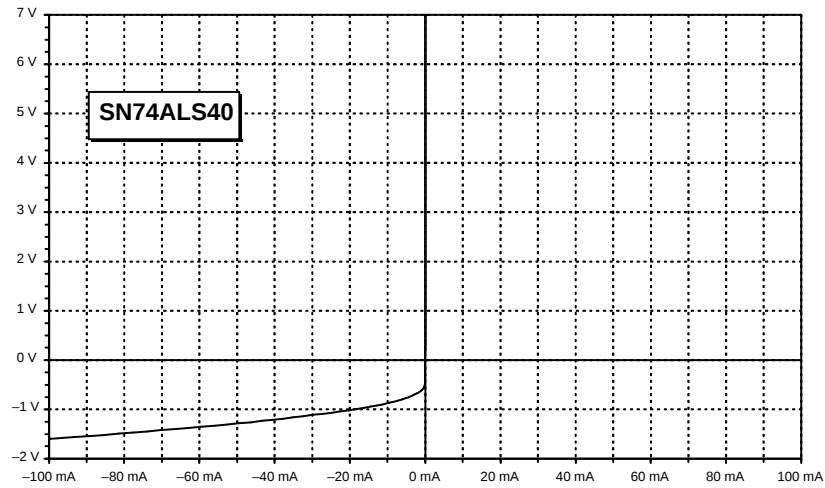


Figure 10. Input Characteristics of the SN74ALS40

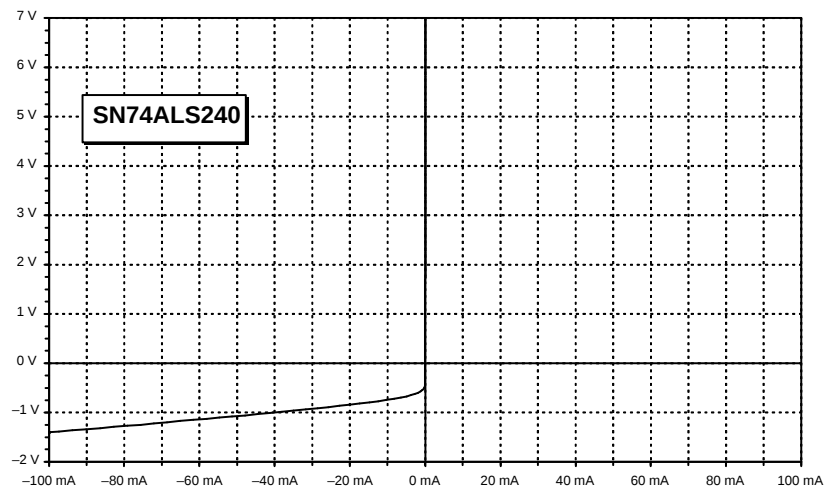


Figure 11. Input Characteristics of the SN74ALS240

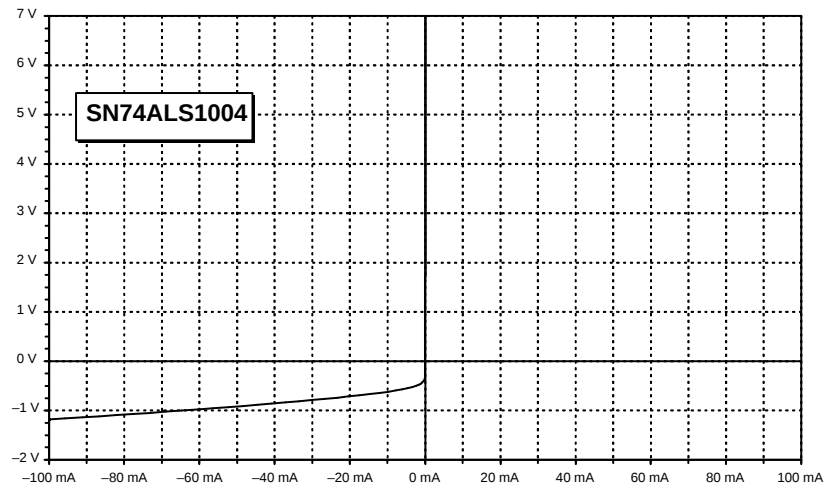


Figure 12. Input Characteristics of the SN74ALS1004

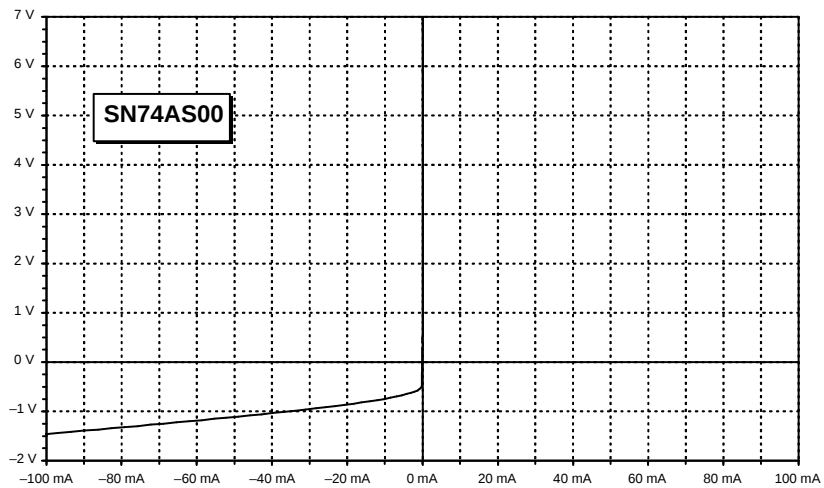


Figure 13. Input Characteristics of the SN74AS00

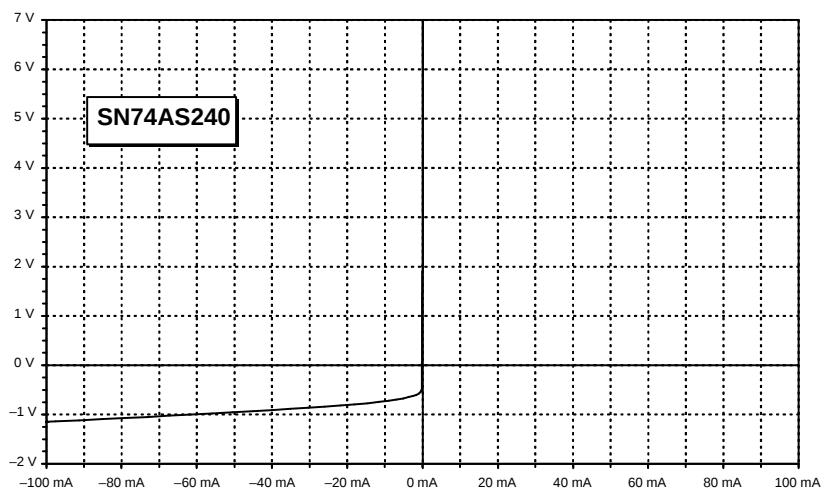


Figure 14. Input Characteristics of the SN74AS240

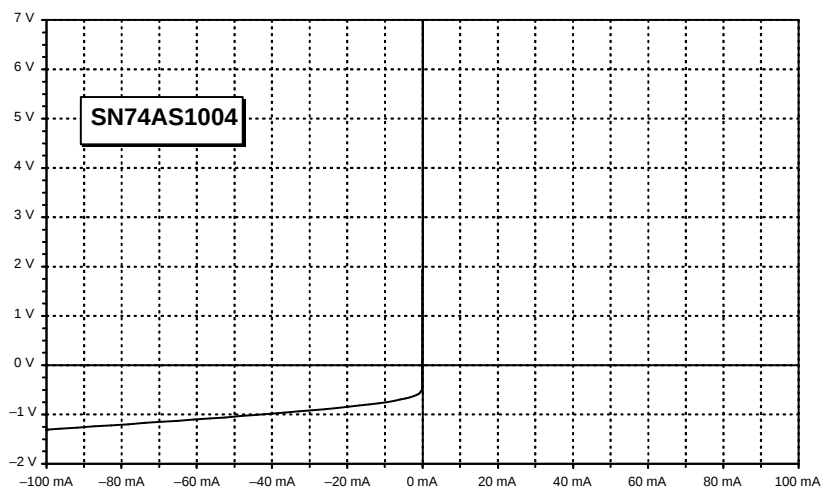


Figure 15. Input Characteristics of the SN74AS1004

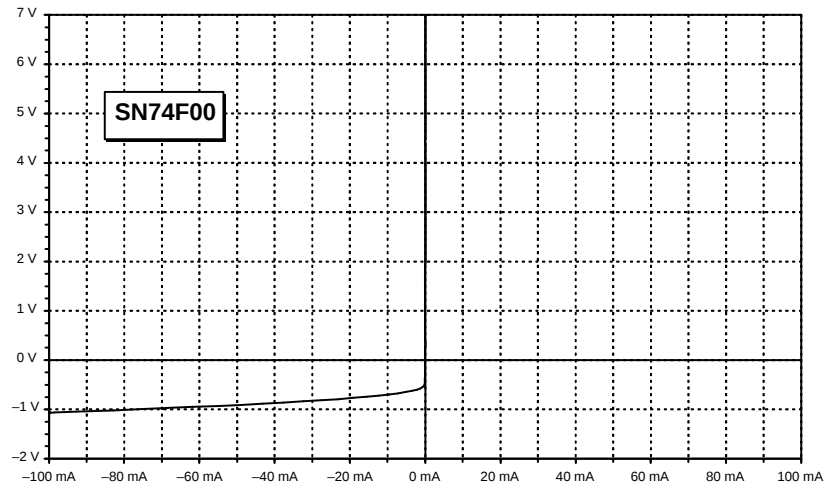


Figure 16. Input Characteristics of the SN74F00

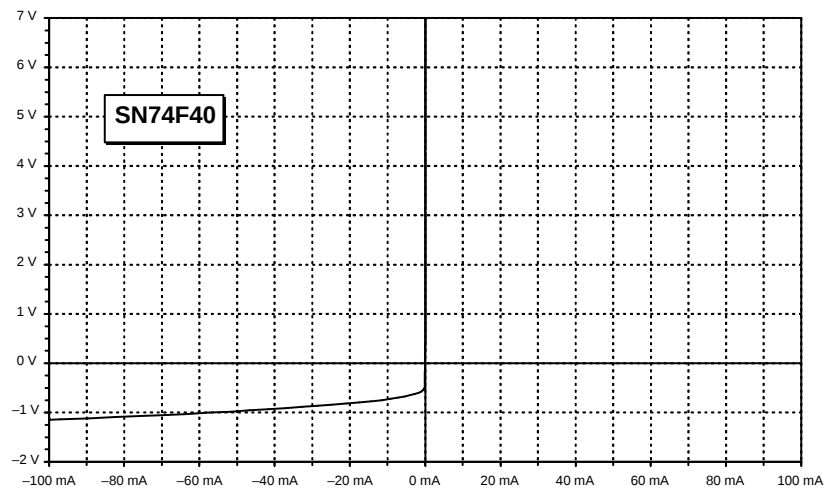


Figure 17. Input Characteristics of the SN74F40

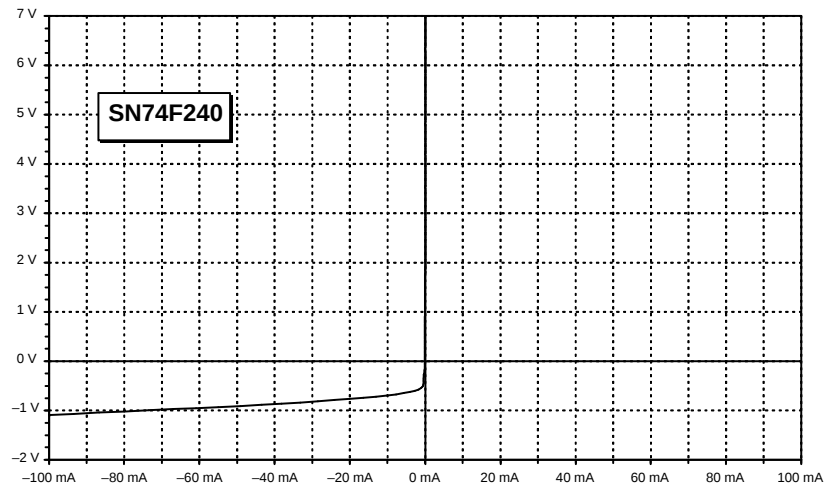


Figure 18. Input Characteristics of the SN74F240

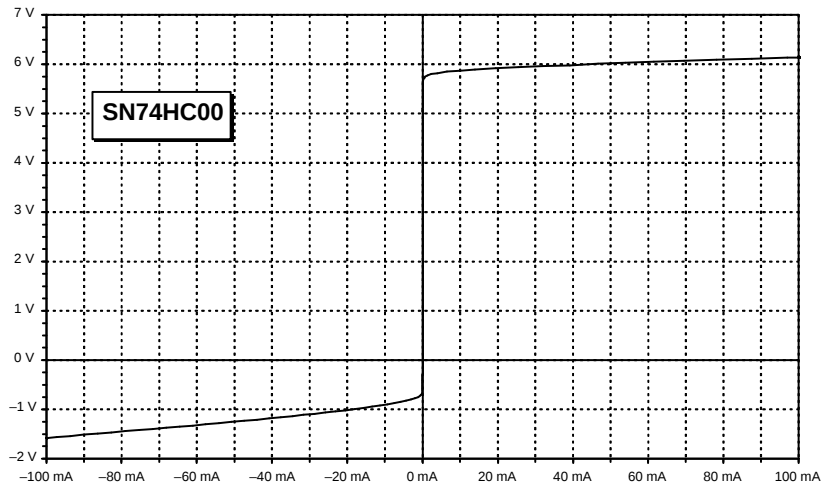


Figure 19. Input Characteristics of the SN74HC00

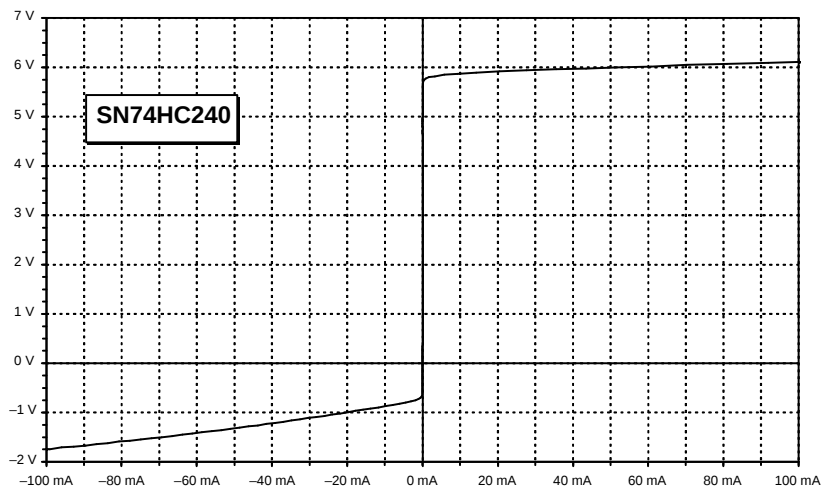


Figure 20. Input Characteristics of the SN74HC240

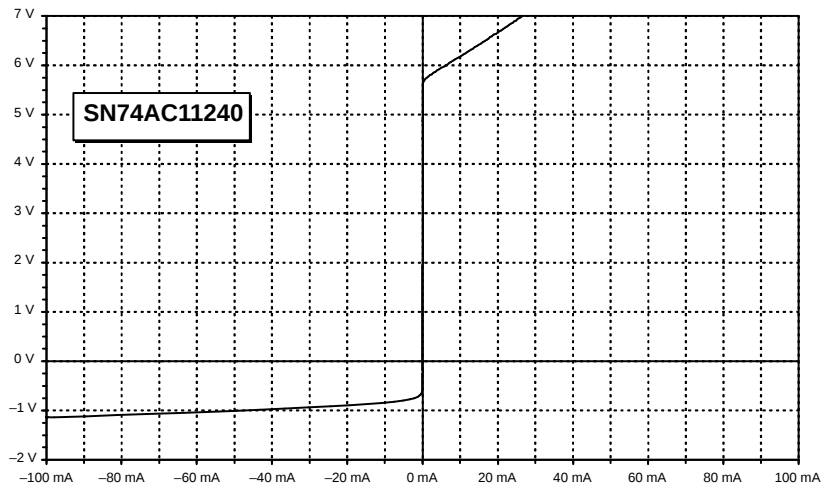


Figure 21. Input Characteristics of the SN74AC11240

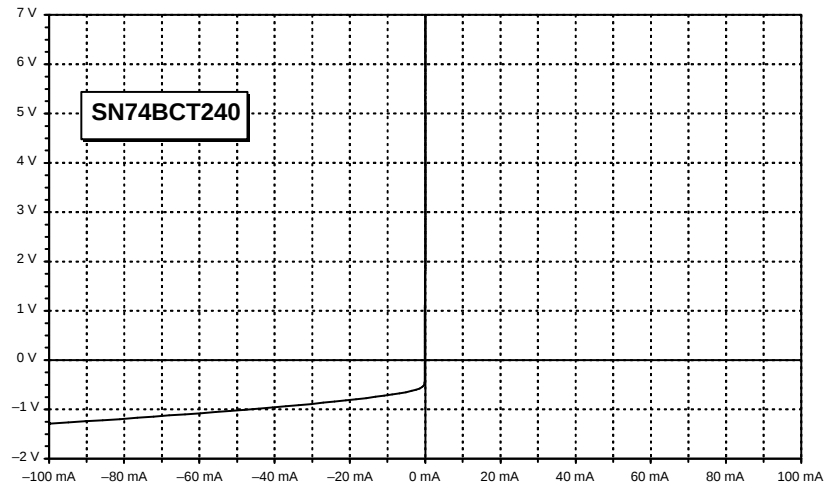


Figure 22. Input Characteristics of the SN74BCT240

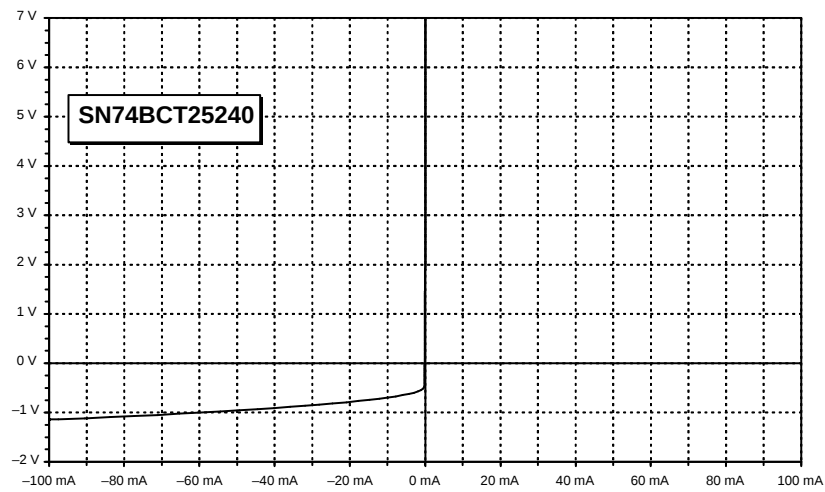


Figure 23. Input Characteristics of the SN74BCT25240

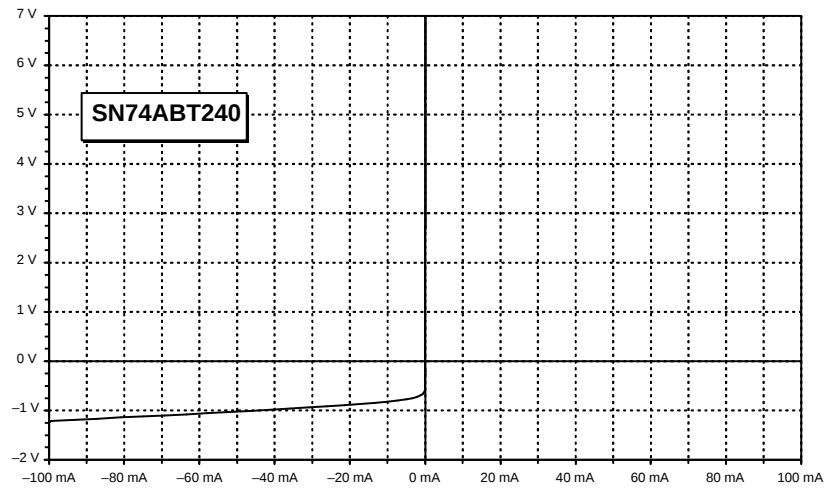


Figure 24. Input Characteristics of the SN74ABT240

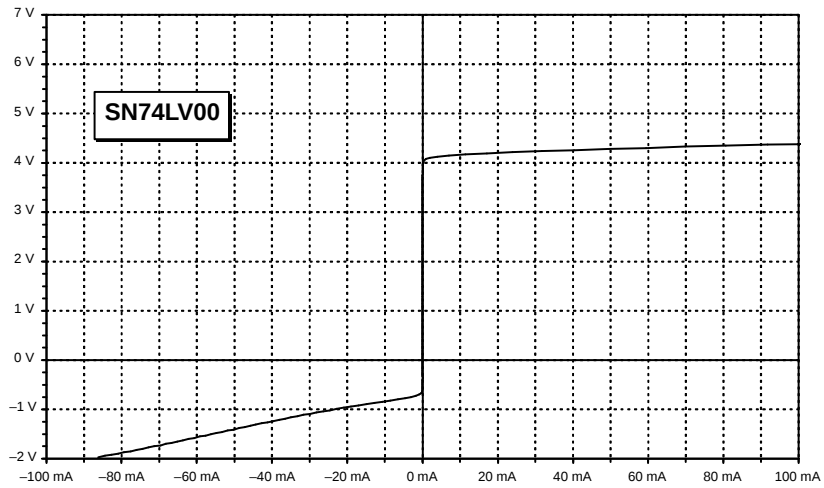


Figure 25. Input Characteristics of the SN74LV00

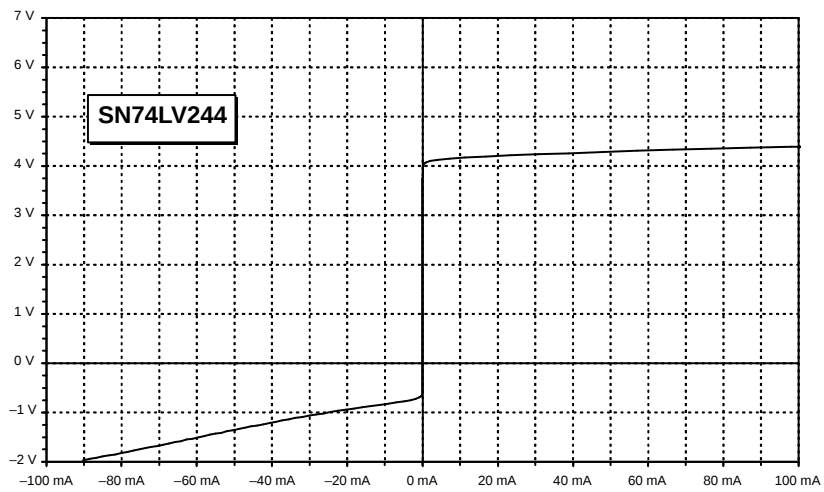


Figure 26. Input Characteristics of the SN74LV244

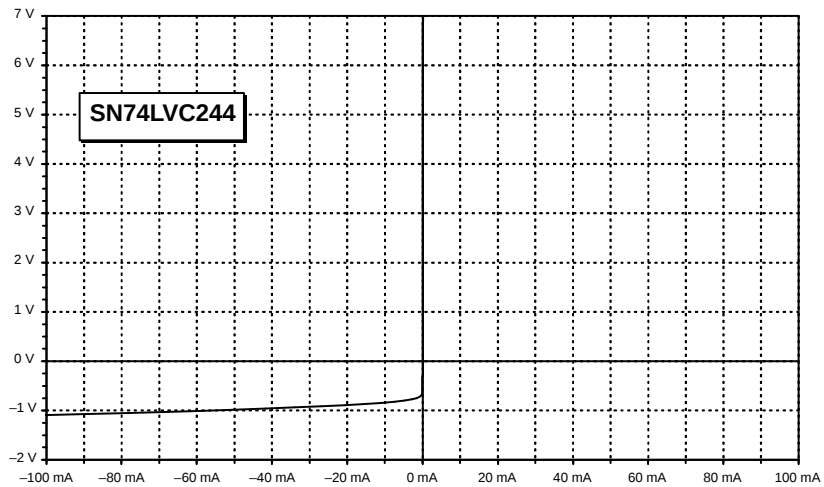


Figure 27. Input Characteristics of the SN74LVC244

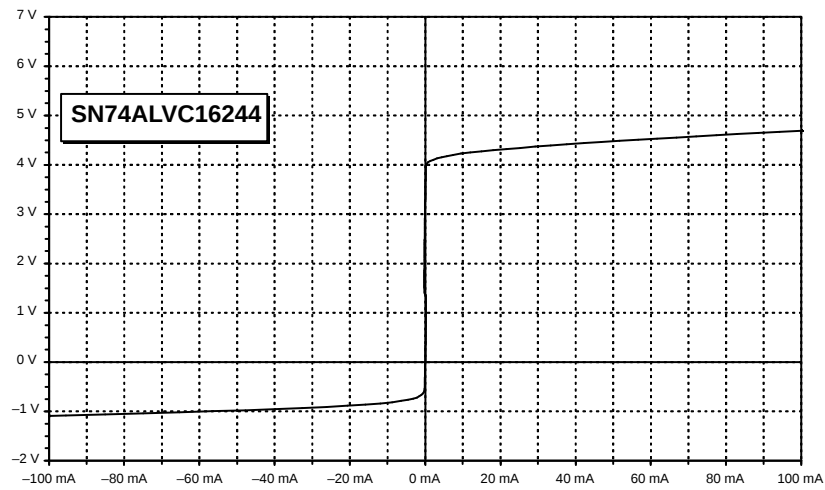


Figure 28. Input Characteristics of the SN74ALVC16244

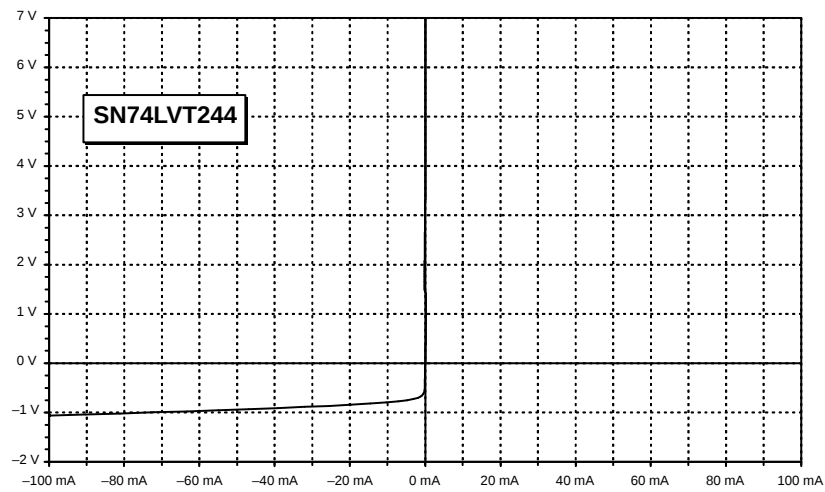


Figure 29. Input Characteristics of the SN74LVT244

3 Output Characteristics

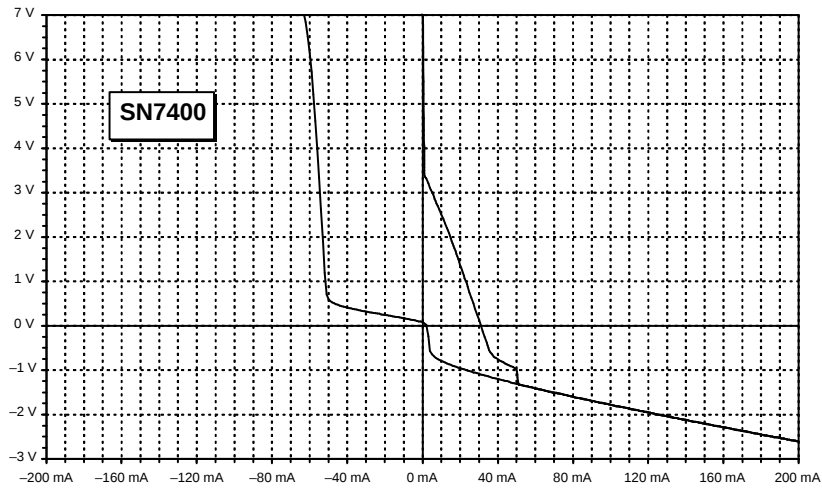


Figure 30. Output Characteristics of the SN7400

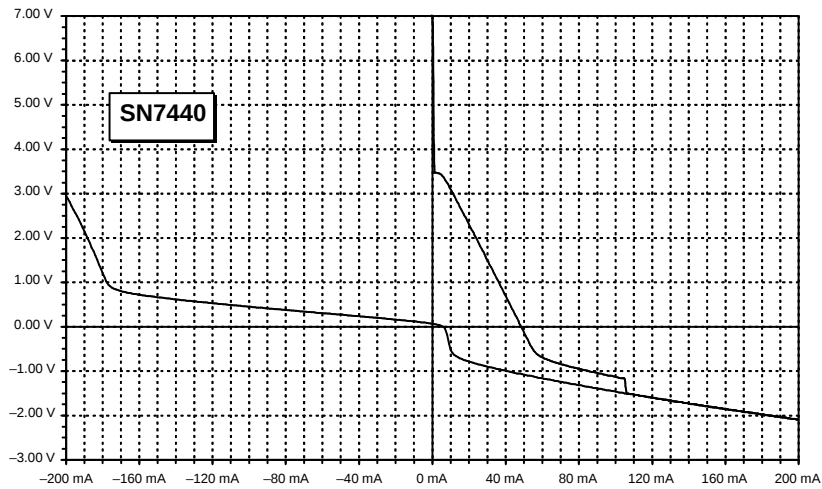


Figure 31. Output Characteristics of the SN7440

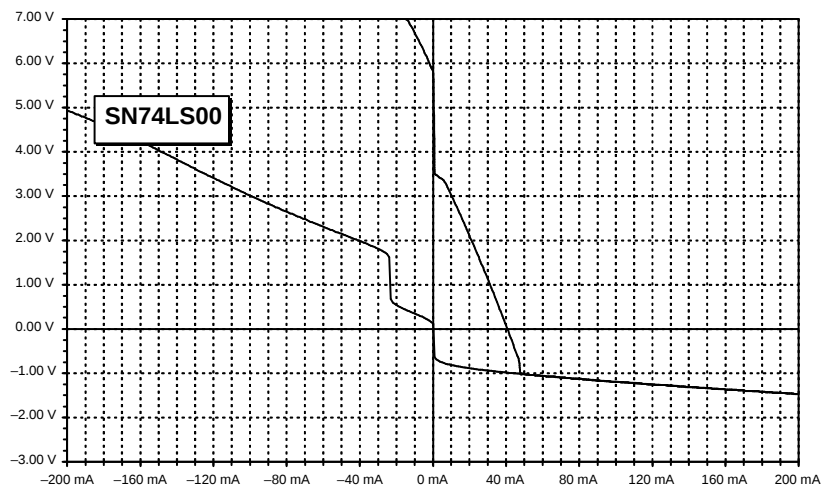


Figure 32. Output Characteristics of the SN74LS00

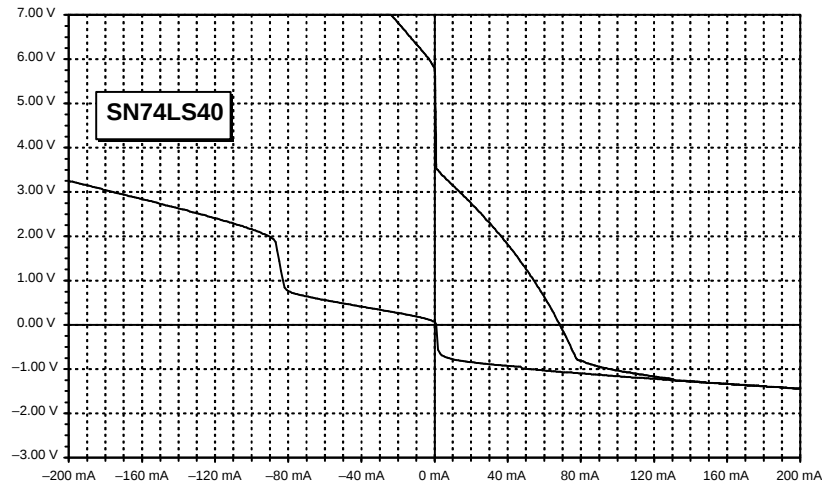


Figure 33. Output Characteristics of the SN74LS40

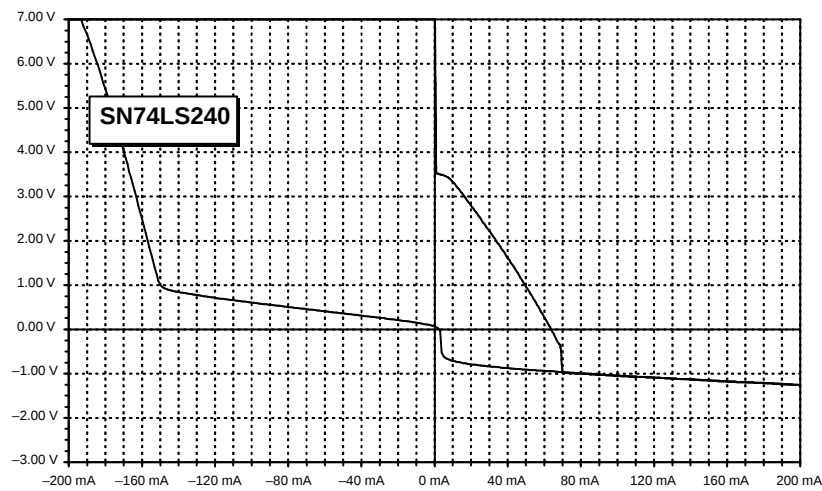


Figure 34. Output Characteristics of the SN74LS240

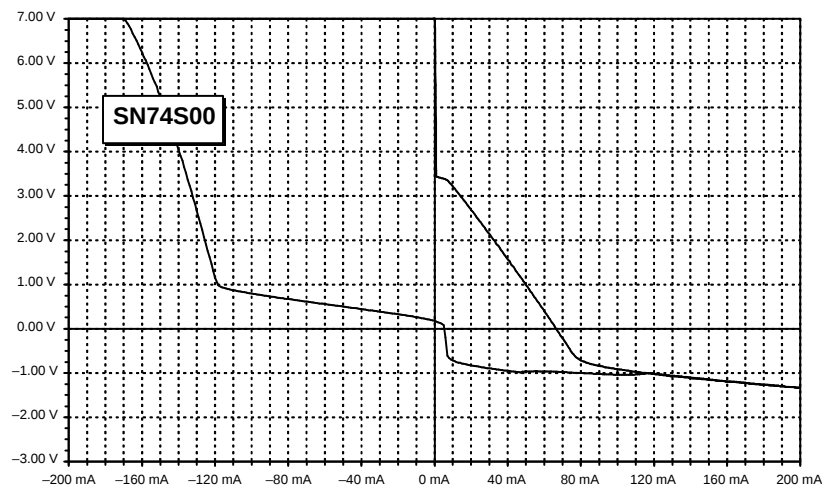


Figure 35. Output Characteristics of the SN74S00

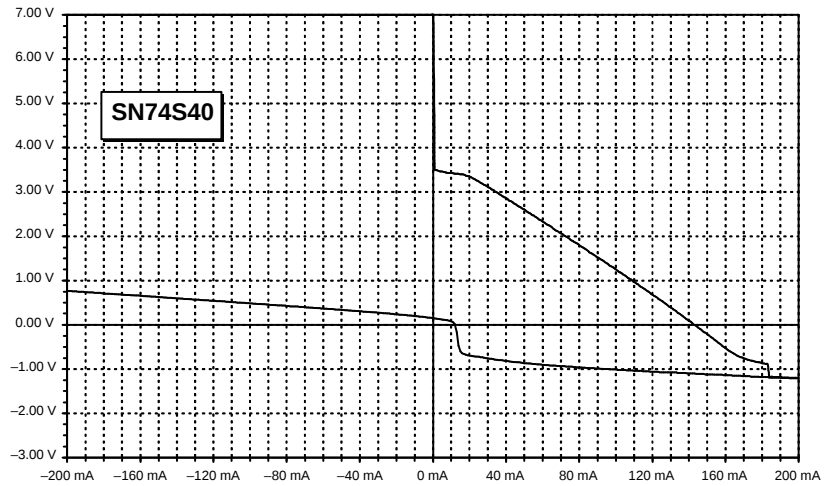


Figure 36. Output Characteristics of the SN74S40



Figure 37. Output Characteristics of the SN74S240

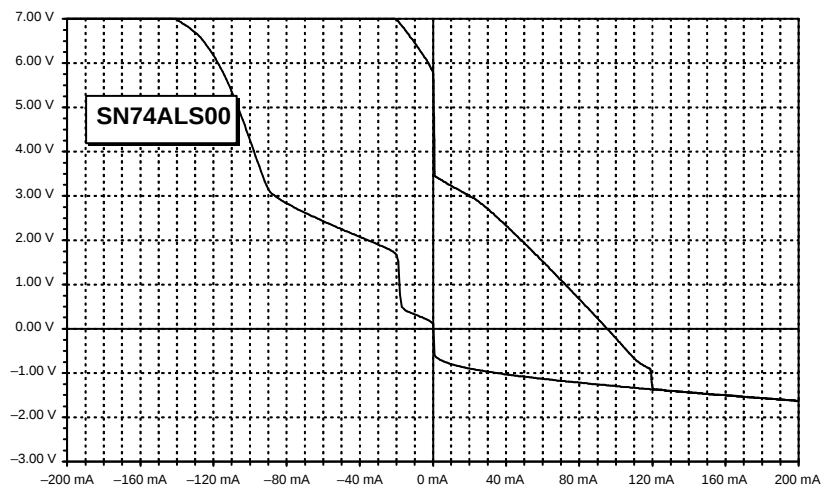


Figure 38. Output Characteristics of the SN74ALS00

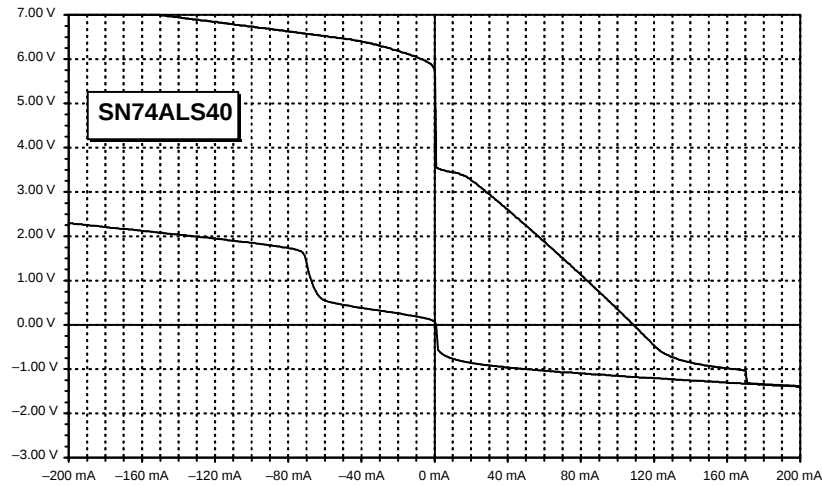


Figure 39. Output Characteristics of the SN74ALS40

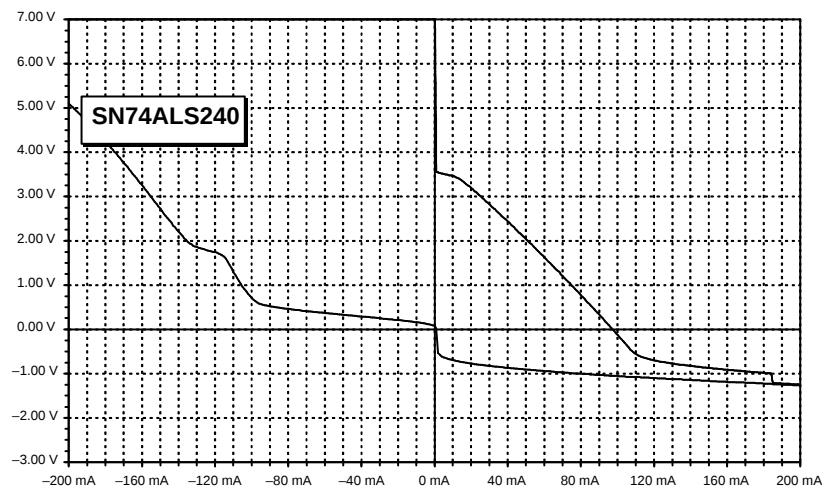


Figure 40. Output Characteristics of the SN74ALS240

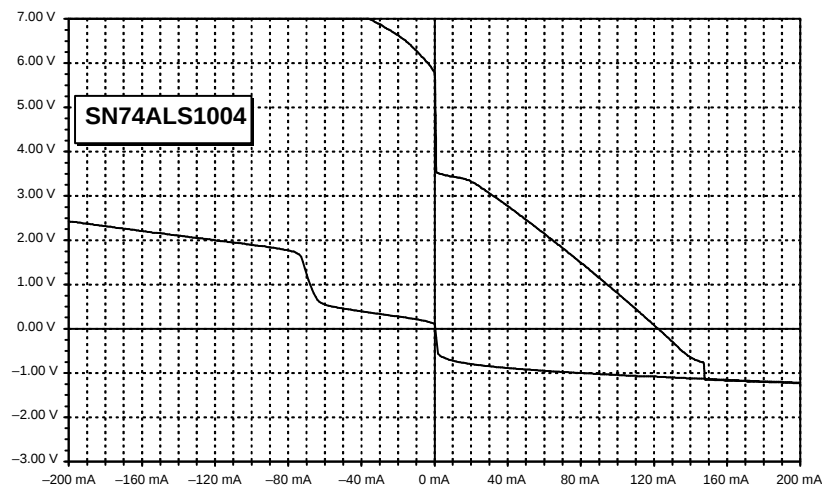


Figure 41. Output Characteristics of the SN74ALS1004

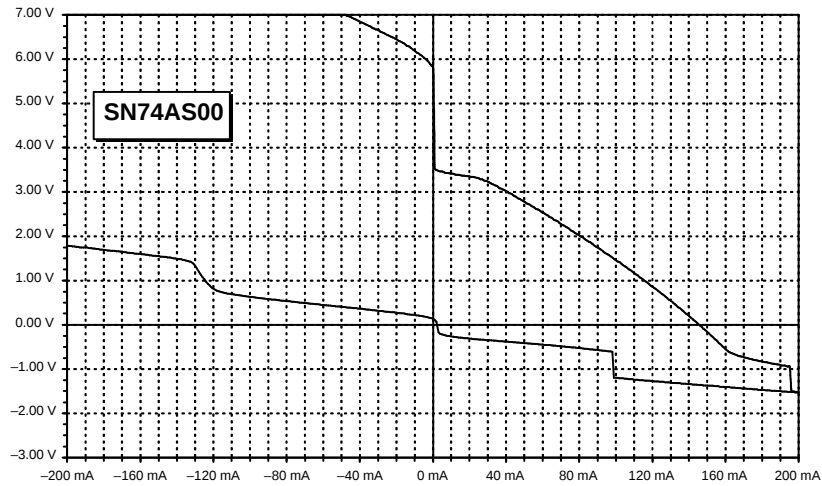


Figure 42. Output Characteristics of the SN74AS00

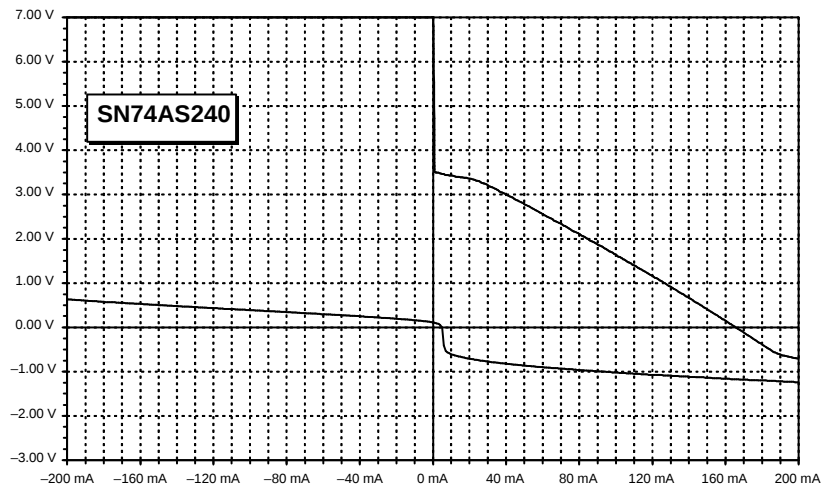


Figure 43. Output Characteristics of the SN74AS240

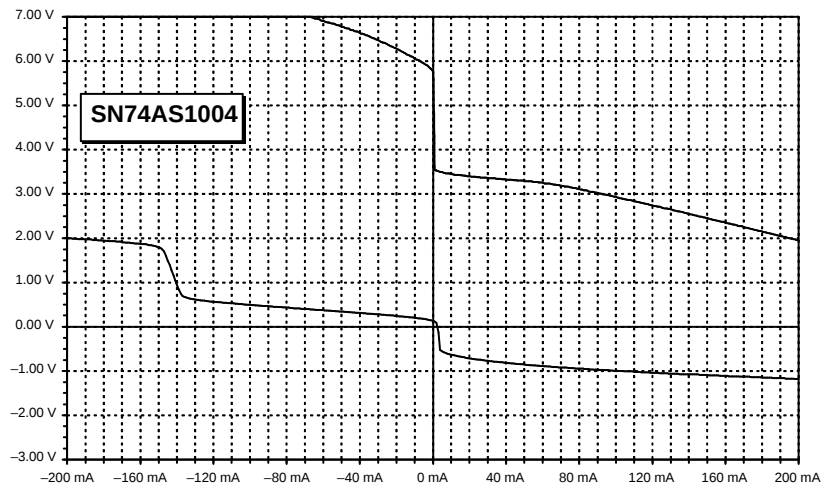


Figure 44. Output Characteristics of the SN74AS1004

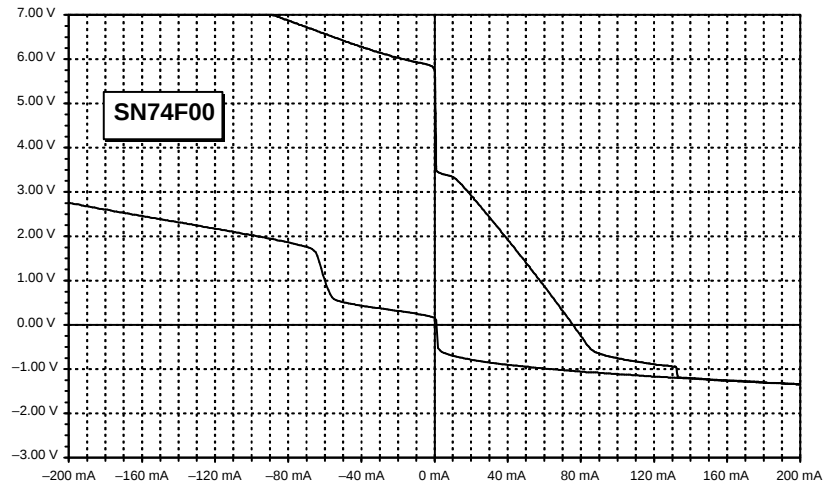


Figure 45. Output Characteristics of the SN74F00

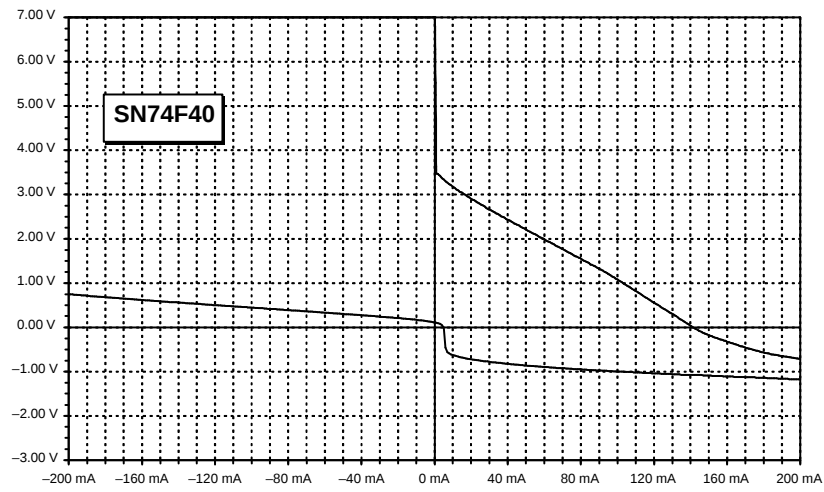


Figure 46. Output Characteristics of the SN74F40

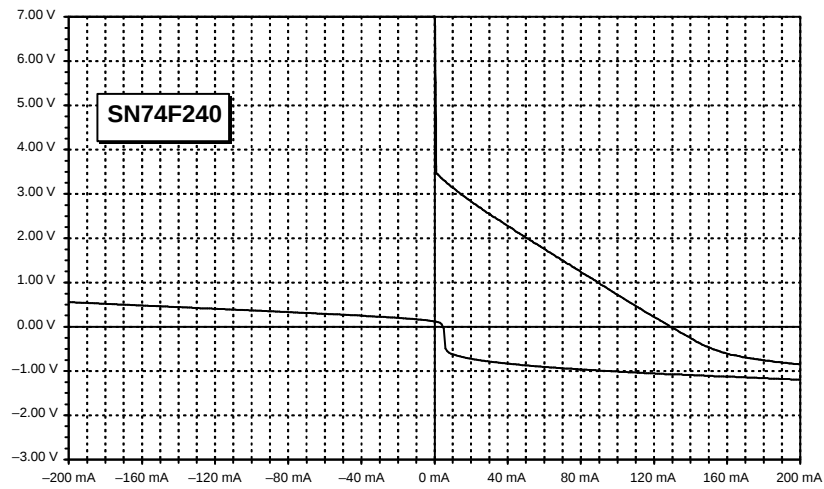


Figure 47. Output Characteristics of the SN74F240

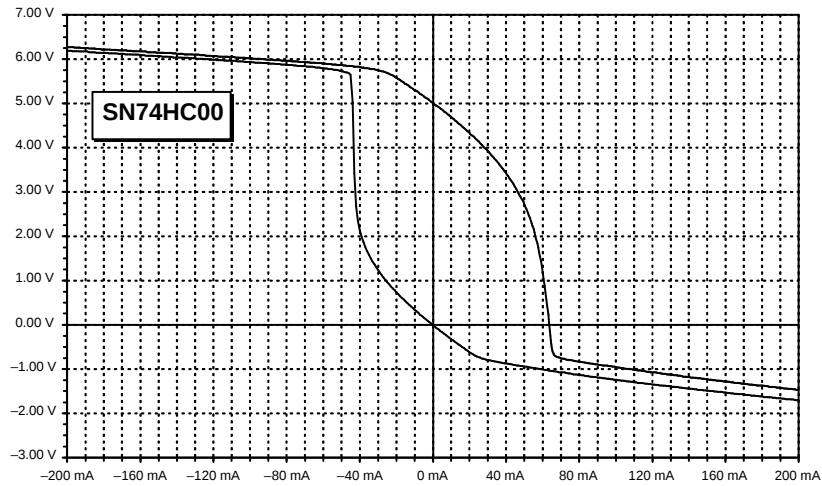


Figure 48. Output Characteristics of the SN74HC00

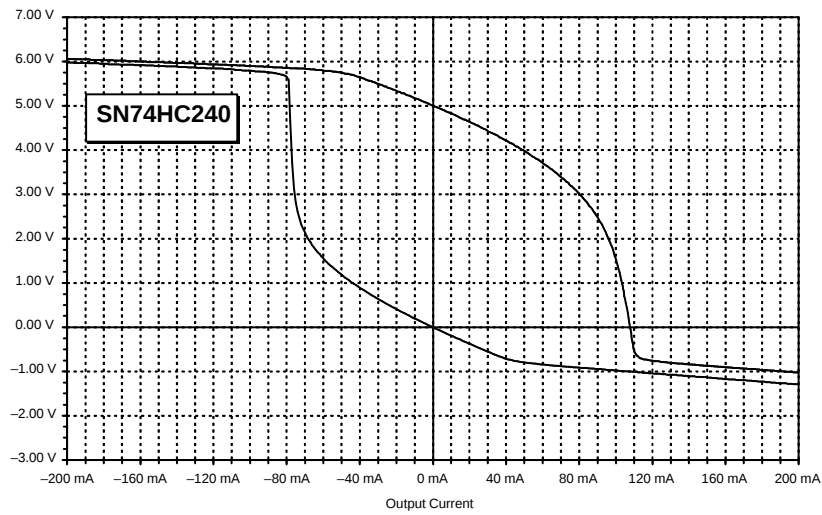


Figure 49. Output Characteristics of the SN74HC240

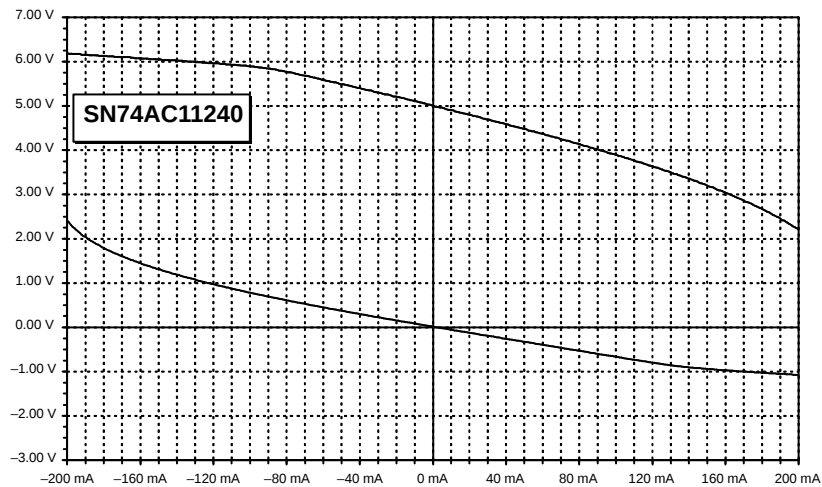


Figure 50. Output Characteristics of the SN74AC11240

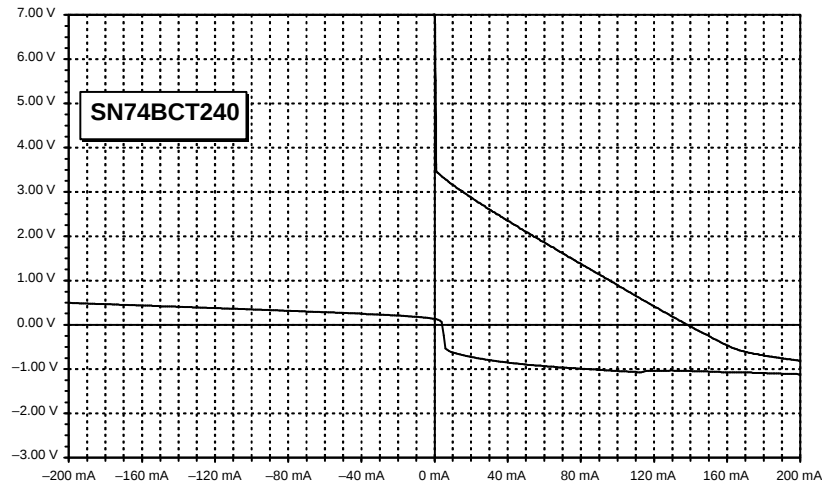


Figure 51. Output Characteristics of the SN74BCT240

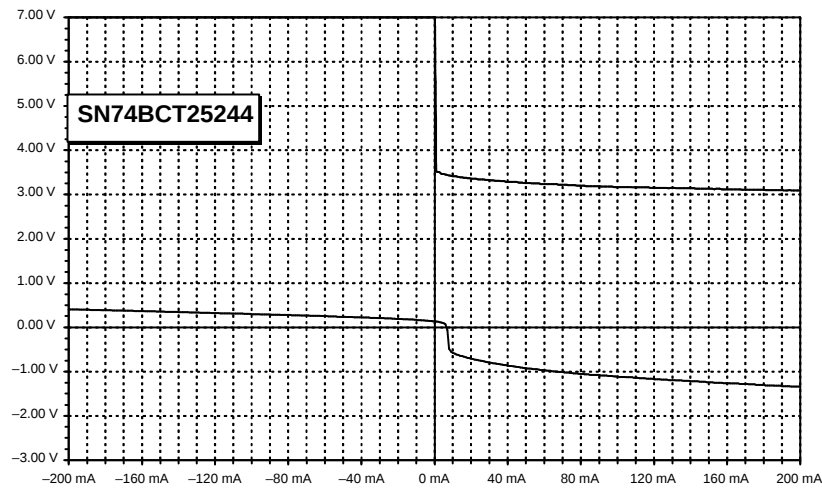


Figure 52. Output Characteristics of the SN74BCT25240

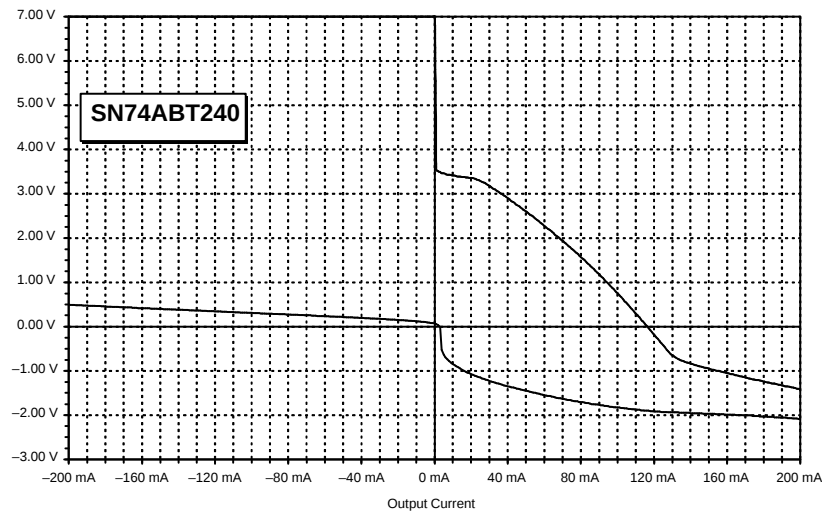


Figure 53. Output Characteristics of the SN74ABT240

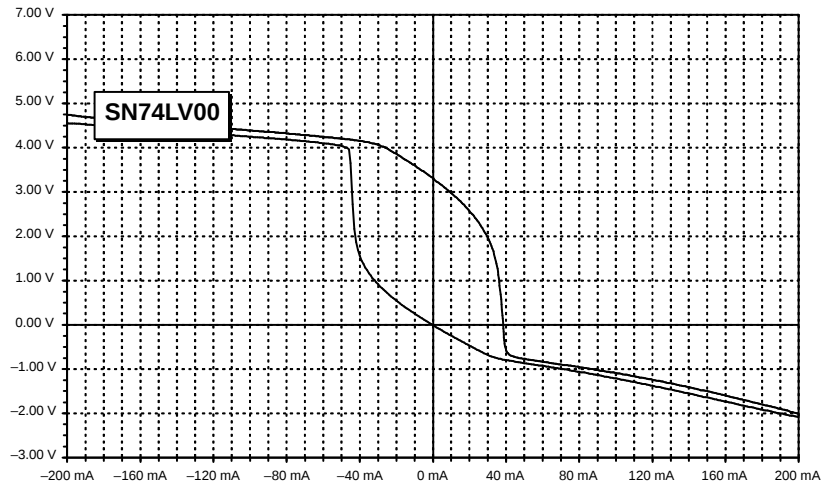


Figure 54. Output Characteristics of the SN74LV00



Figure 55. Output Characteristics of the SN74LV244

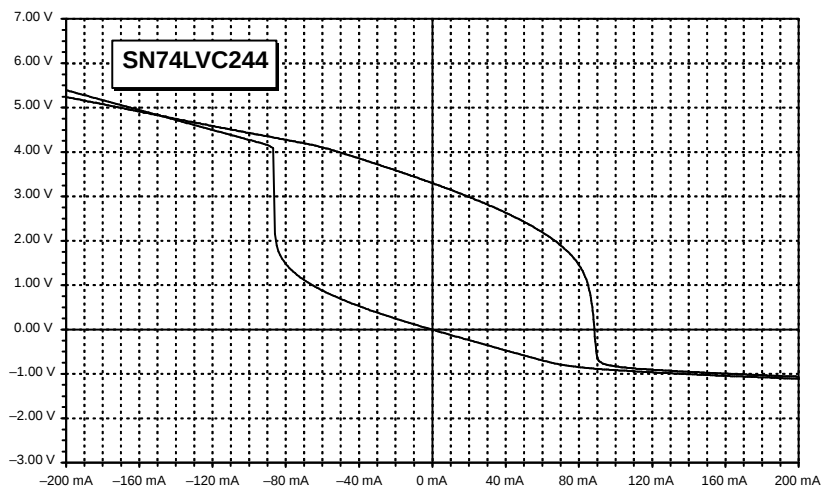


Figure 56. Output Characteristics of the SN74LVC244

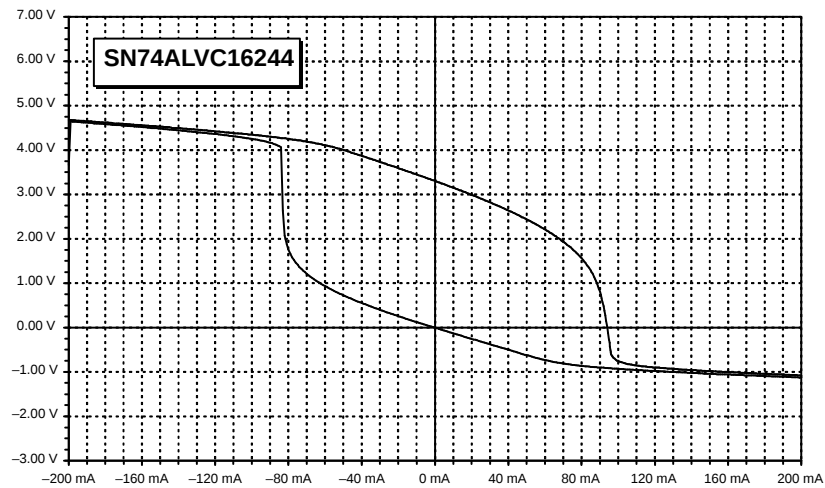


Figure 57. Output Characteristics of the SN74ALVC16244



Figure 58. Output Characteristics of the SN74LVT244

4 Output Waveforms

The setup shown in Figure 59 was used to obtain voltage waveforms of typically representative output stages (see Figures 60 through 88).

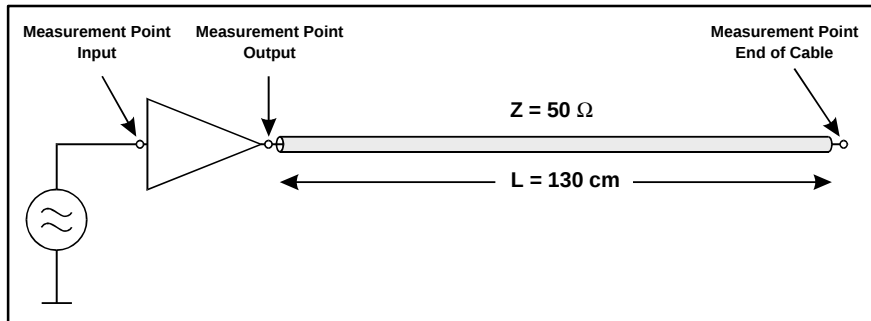


Figure 59. Setup for Obtaining Output Waveforms

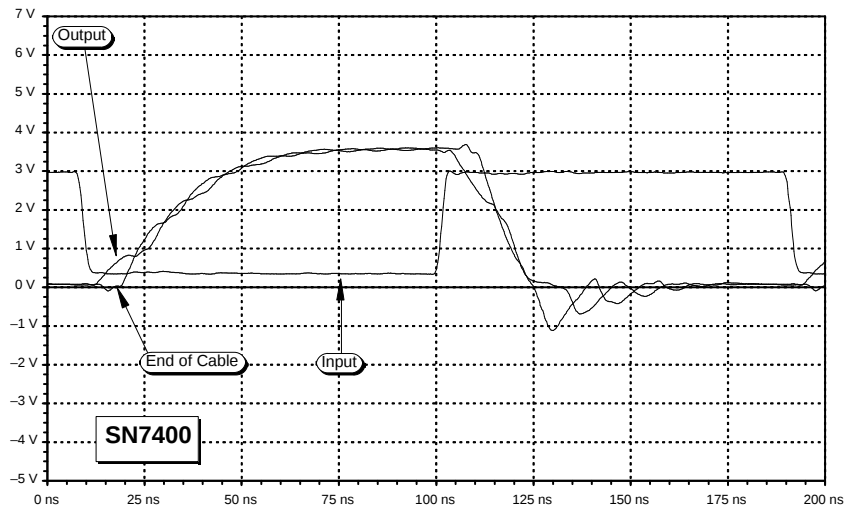


Figure 60. Waveforms of the SN7400

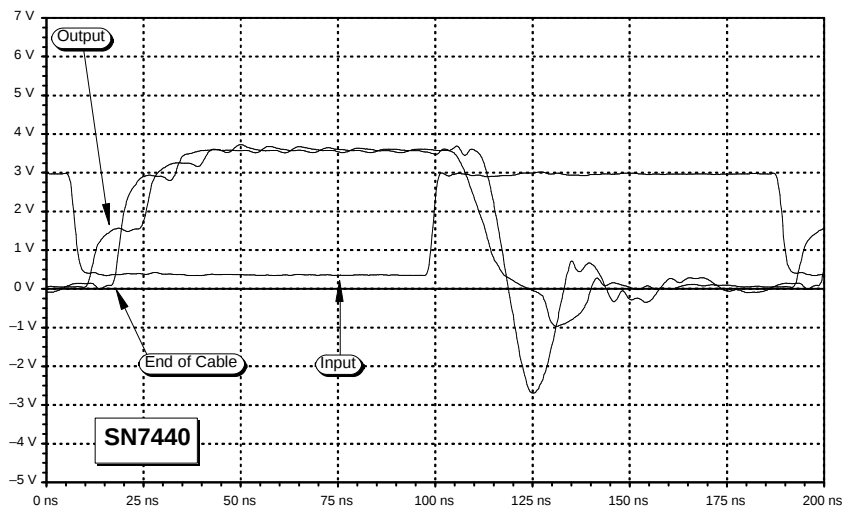


Figure 61. Waveforms of the SN7440

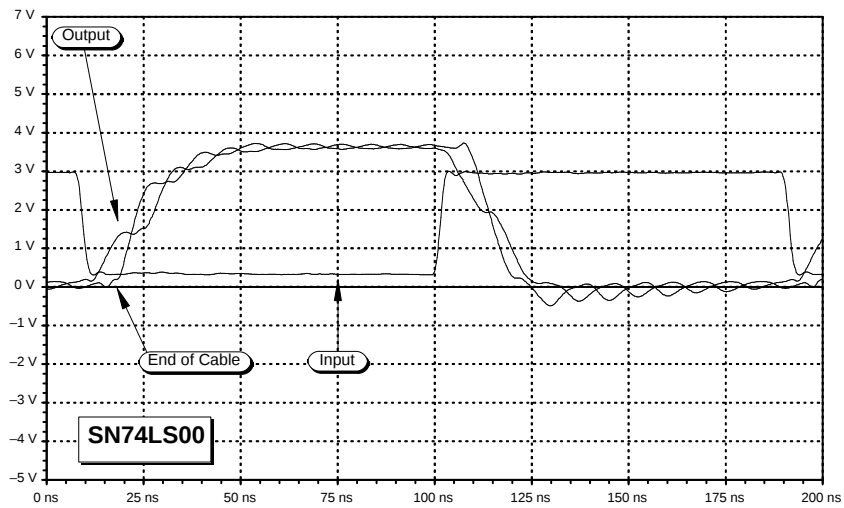


Figure 62. Waveforms of the SN74LS00

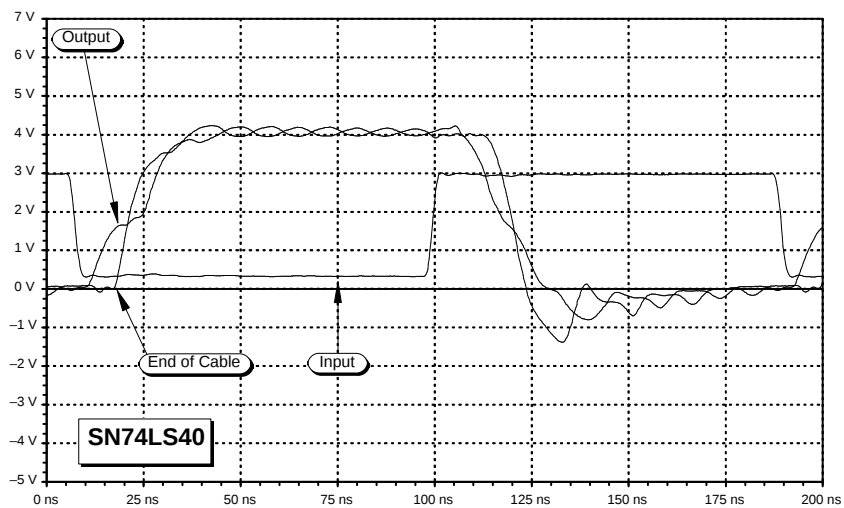


Figure 63. Waveforms of the SN74LS40

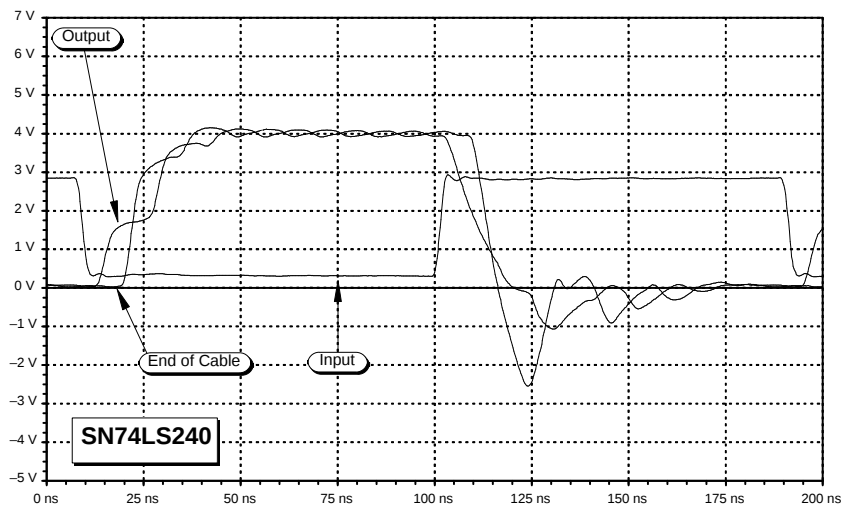


Figure 64. Waveforms of the SN74LS240

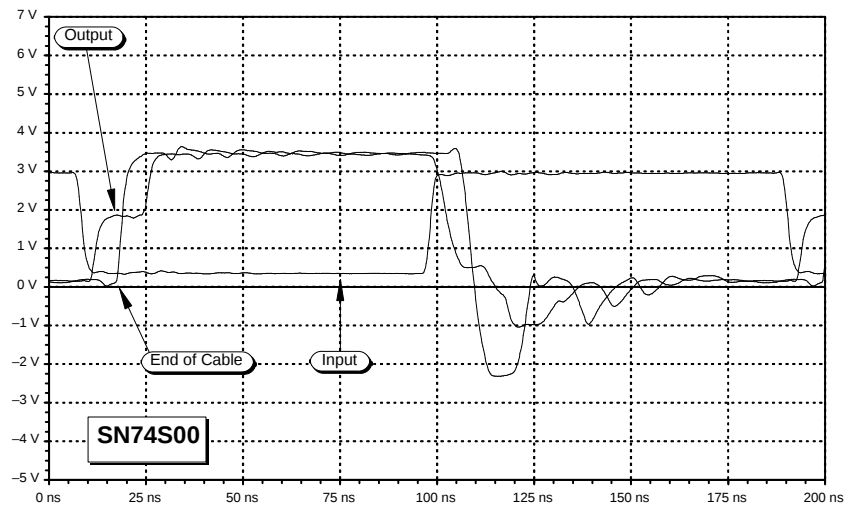


Figure 65. Waveforms of the SN74S00

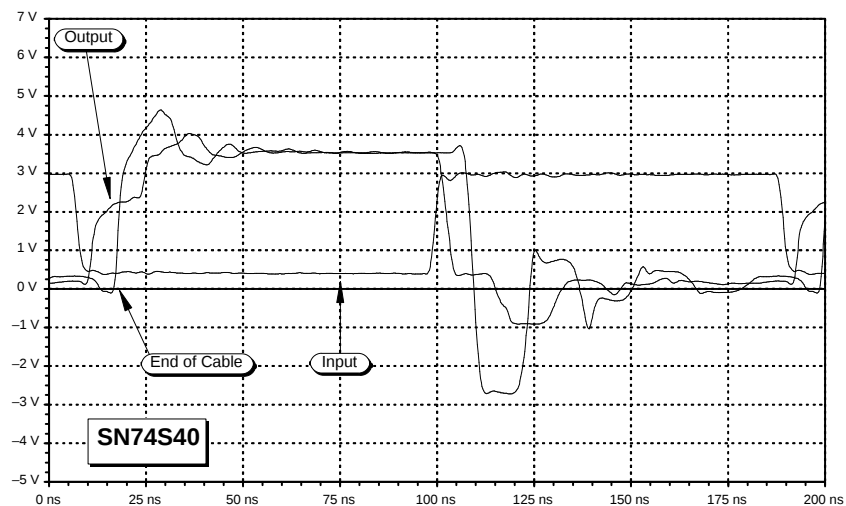


Figure 66. Waveforms of the SN74S40

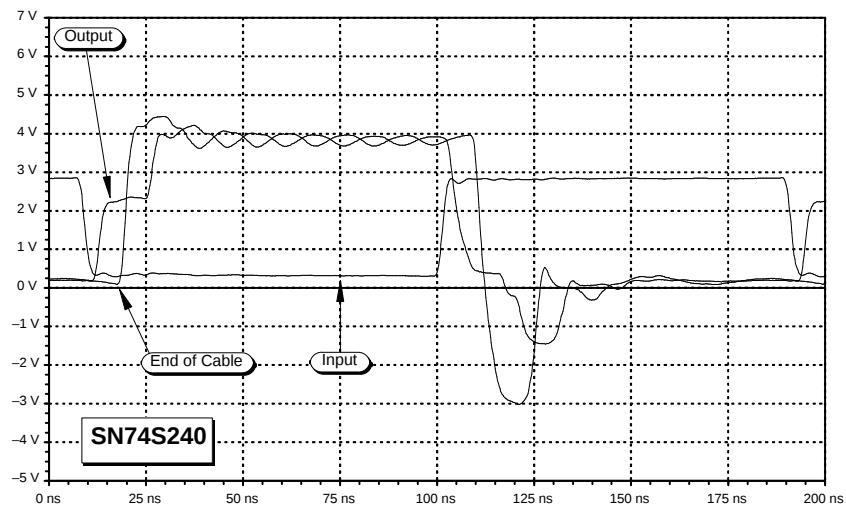


Figure 67. Waveforms of the SN74S240

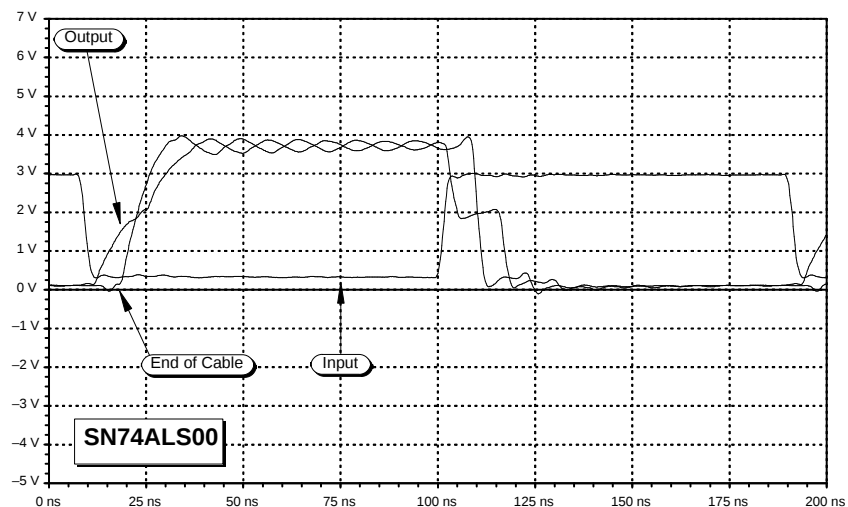


Figure 68. Waveforms of the SN74ALS00

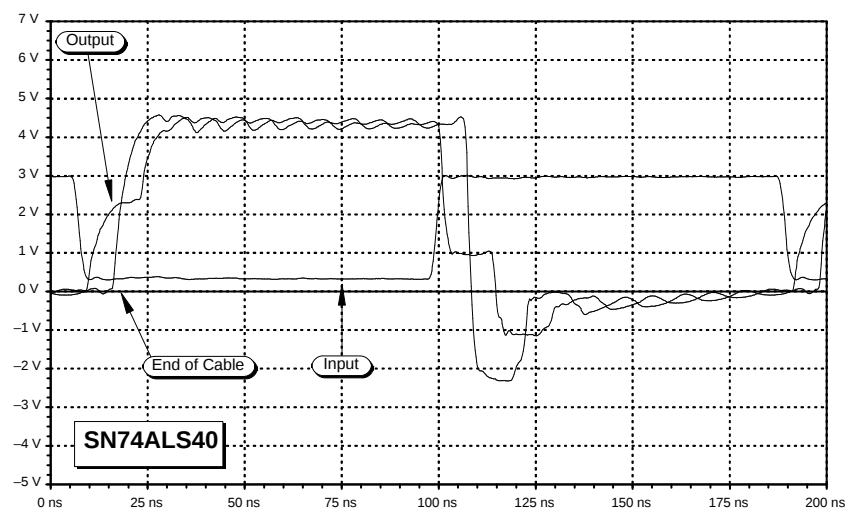


Figure 69. Waveforms of the SN74ALS40

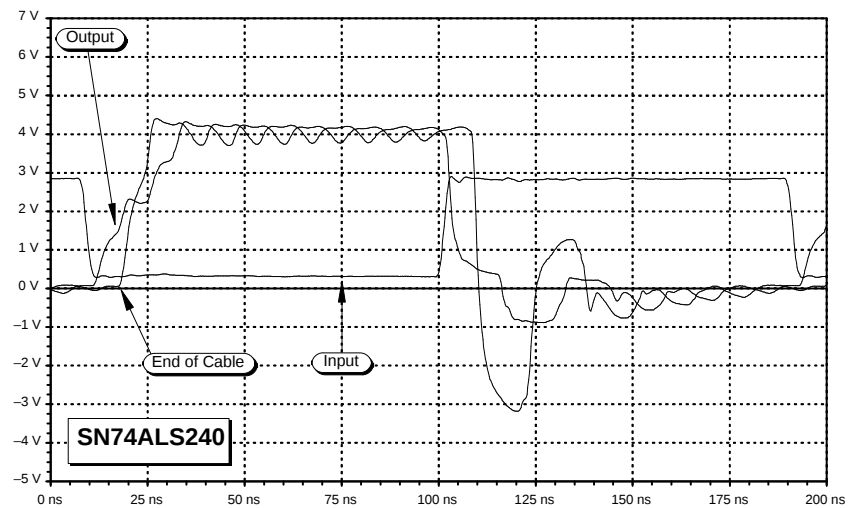


Figure 70. Waveforms of the SN74ALS240

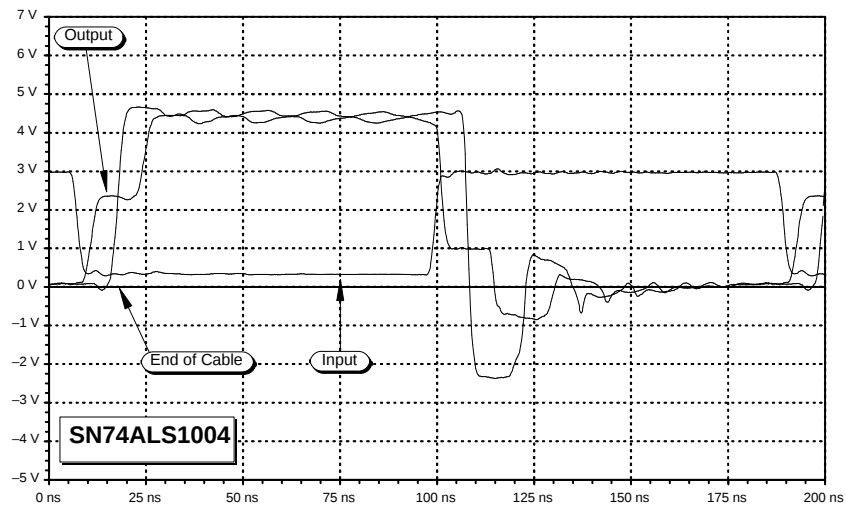


Figure 71. Waveforms of the SN74ALS1004

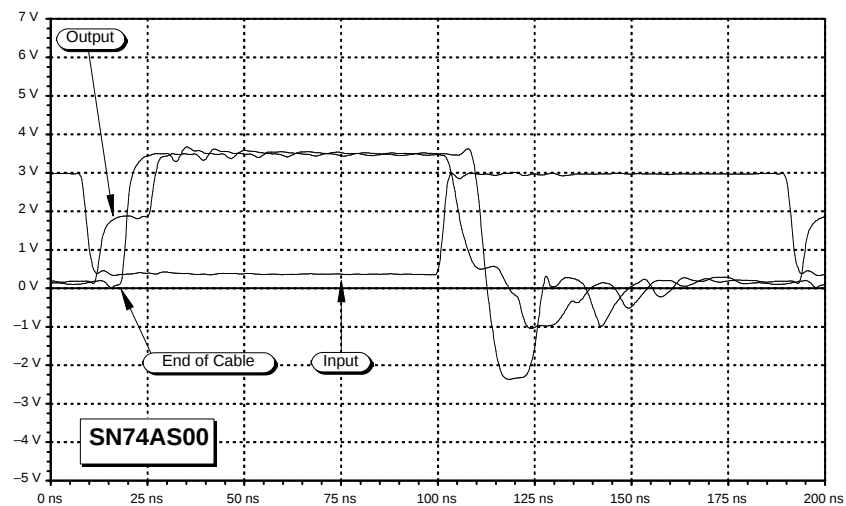


Figure 72. Waveforms of the SN74AS00

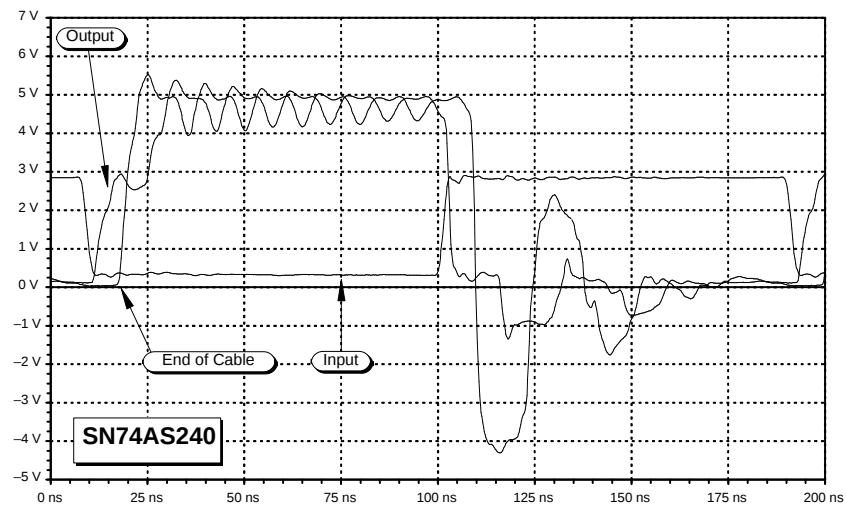


Figure 73. Waveforms of the SN74AS240

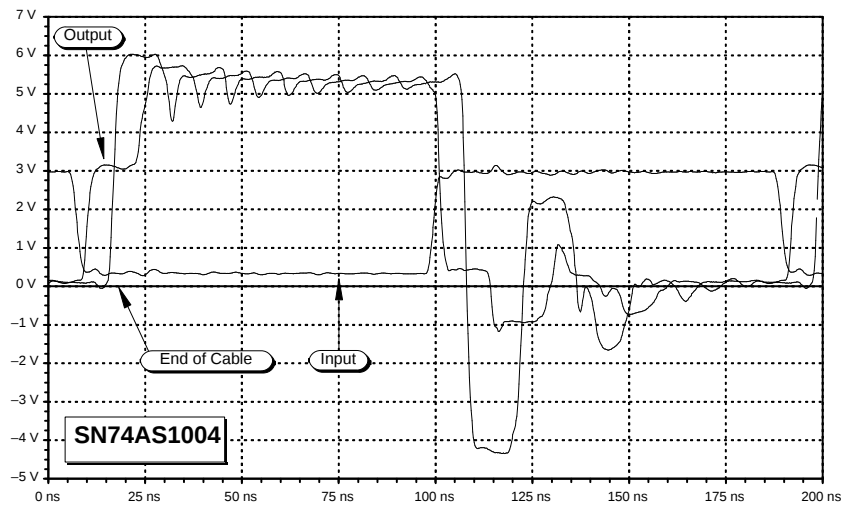


Figure 74. Waveforms of the SN74AS1004

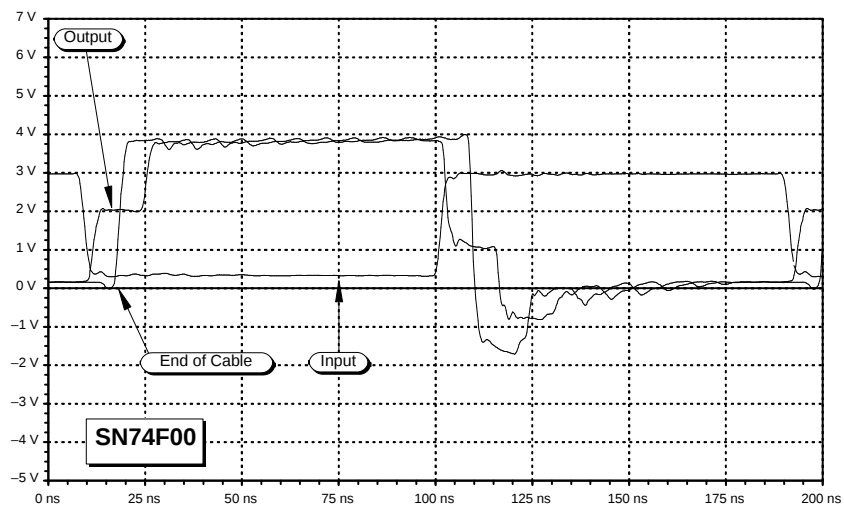


Figure 75. Waveforms of the SN74F00

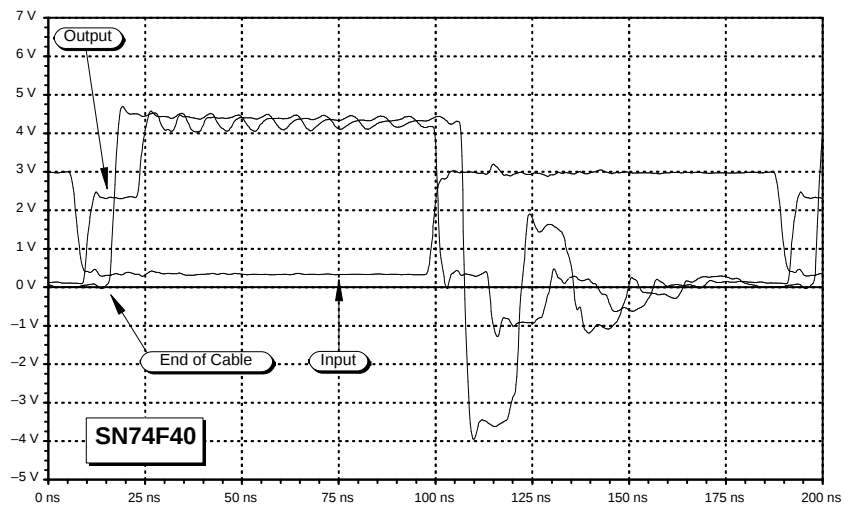


Figure 76. Waveforms of the SN74F40

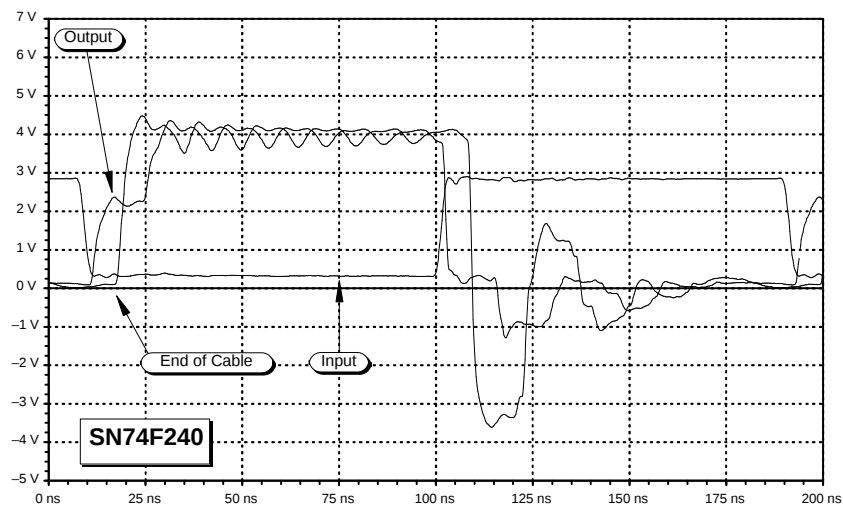


Figure 77. Waveforms of the SN74F240

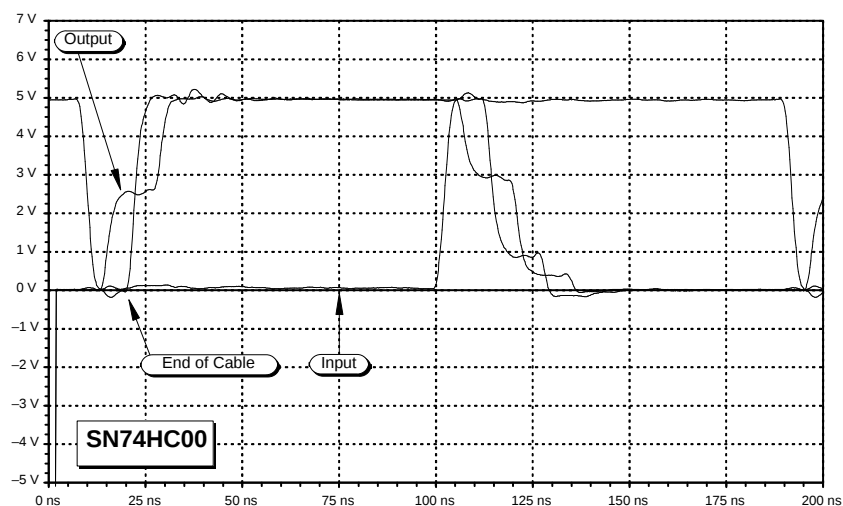


Figure 78. Waveforms of the SN74HC00

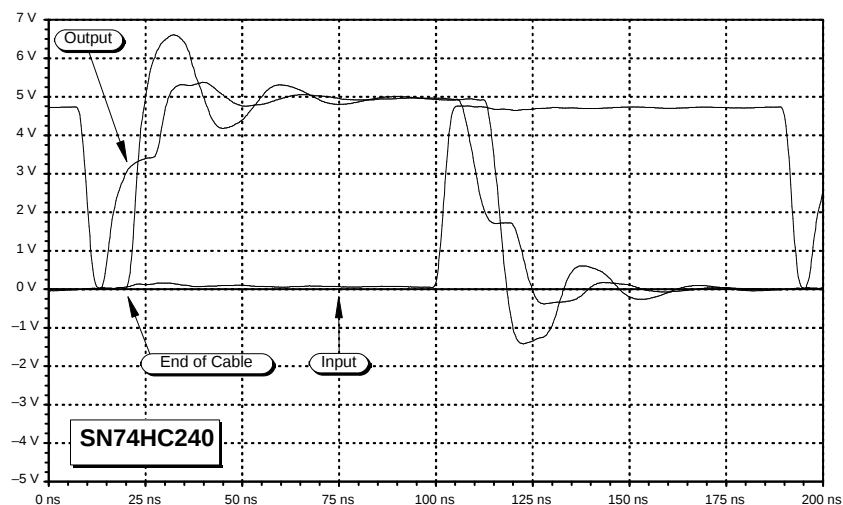


Figure 79. Waveforms of the SN74HC240

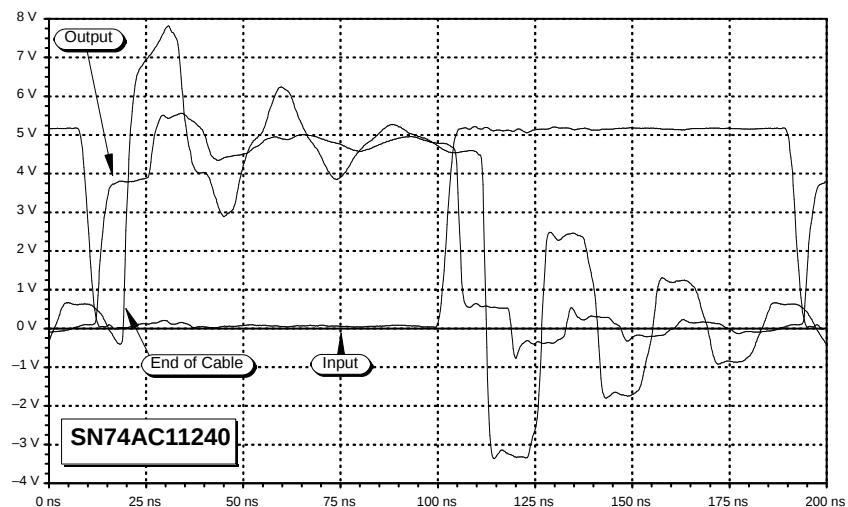


Figure 80. Waveforms of the SN74AC11240

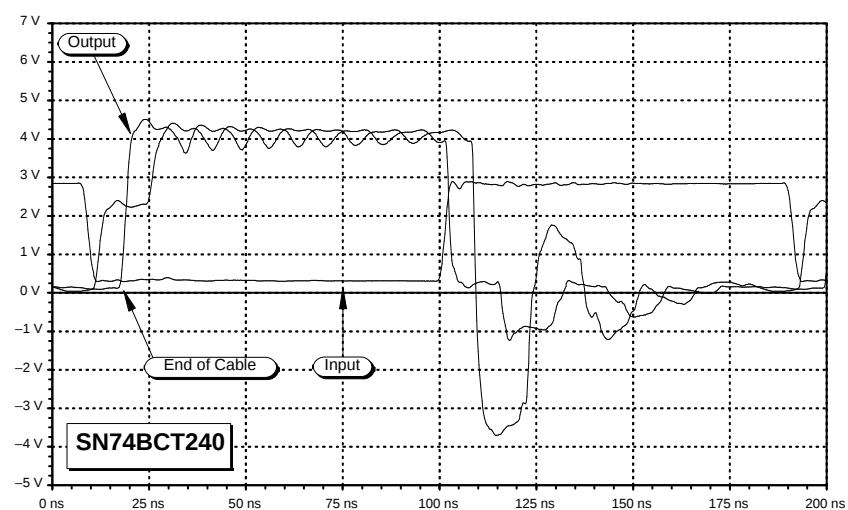


Figure 81. Waveforms of the SN74BCT240

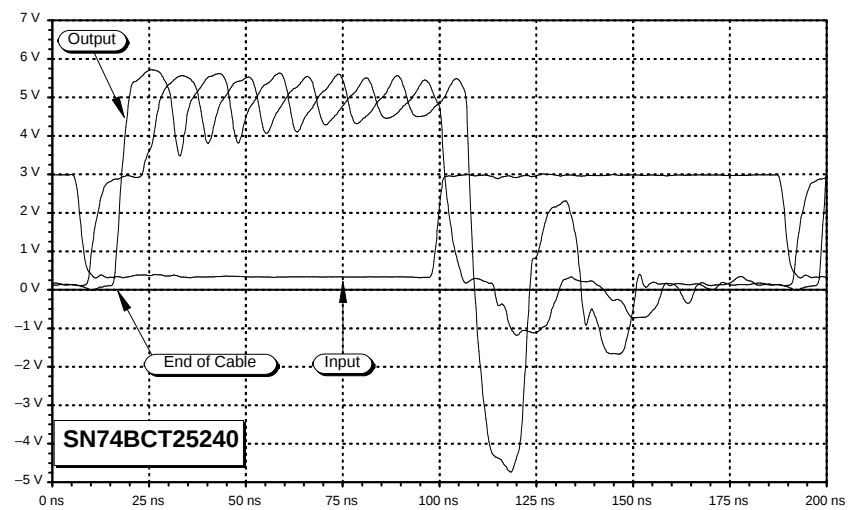


Figure 82. Waveforms of the SN74BCT25240

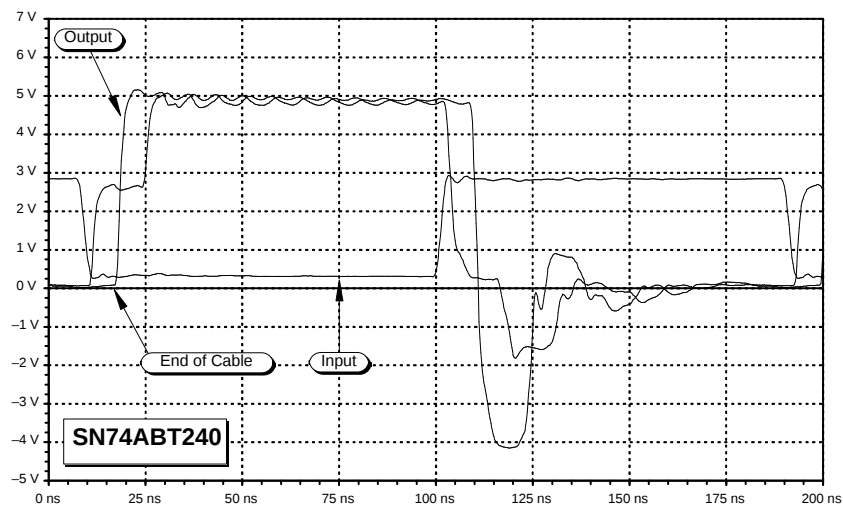


Figure 83. Waveforms of the SN74ABT240

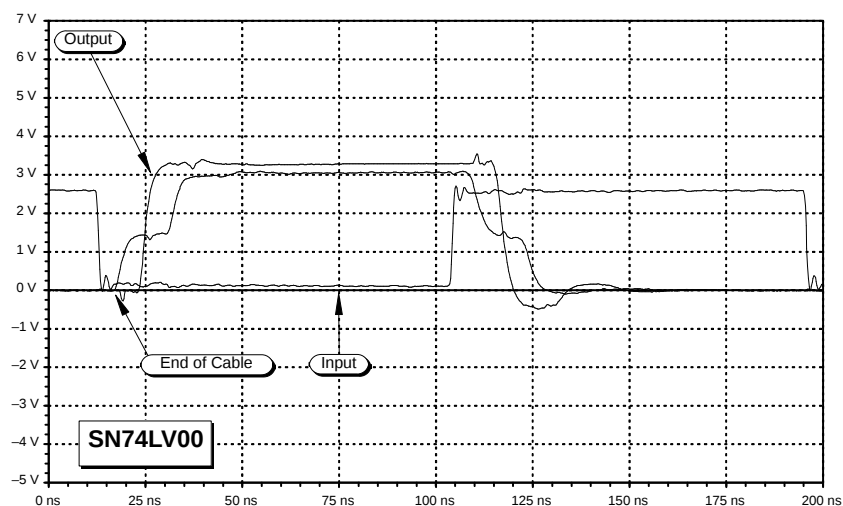


Figure 84. Waveforms of the SN74LV00

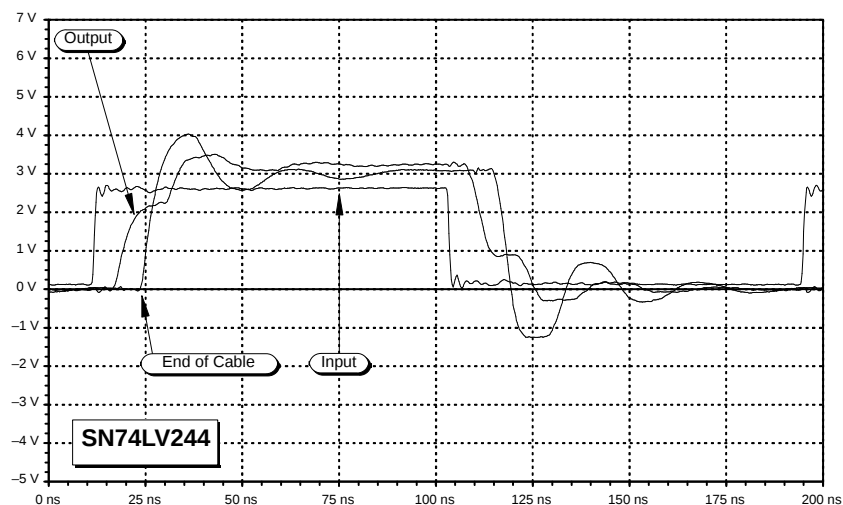


Figure 85. Waveforms of the SN74LV244

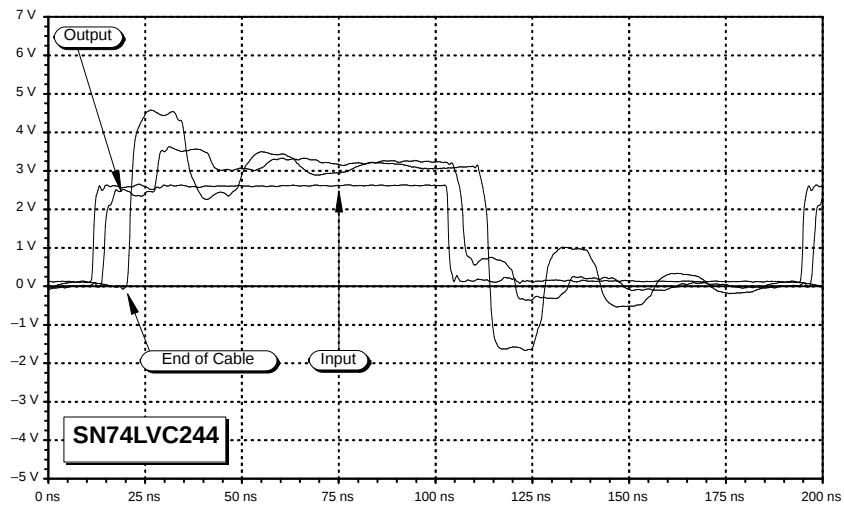


Figure 86. Waveforms of the SN74LVC244

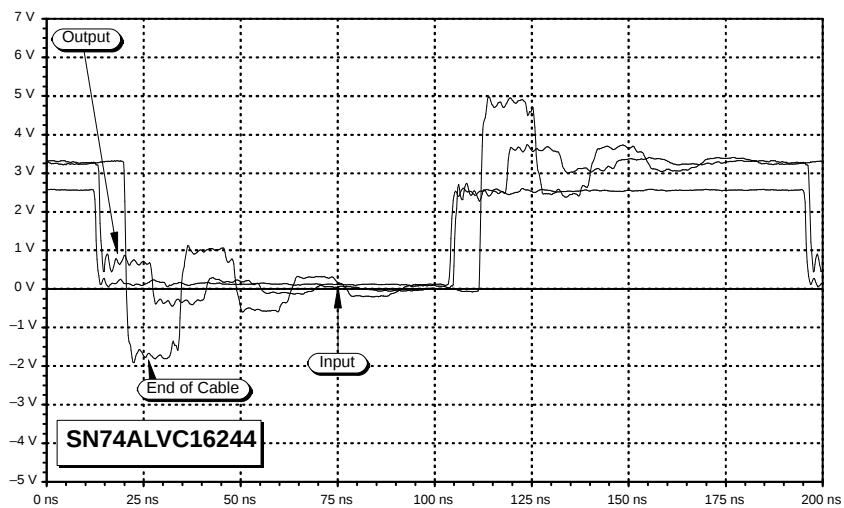


Figure 87. Waveforms of the SN74ALVC16244

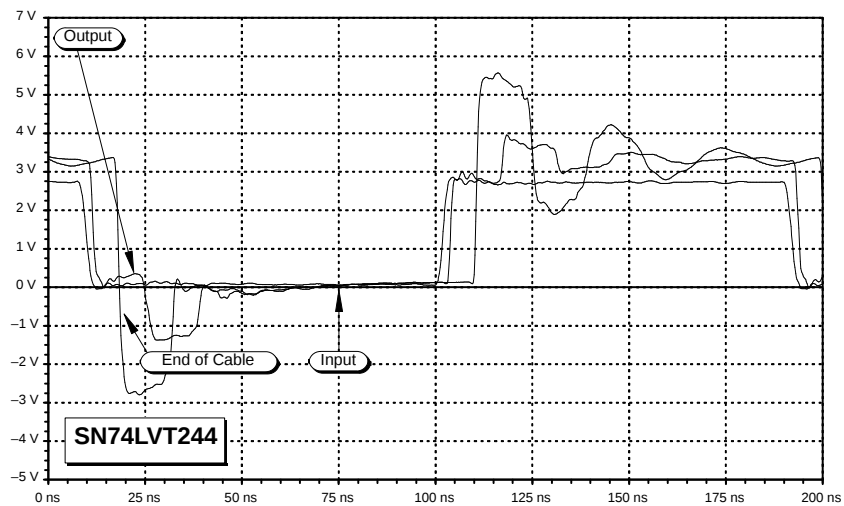


Figure 88. Waveforms of the SN74LVT244

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.