

Rectifier Diode

W0797WC040 to W0797WC150

The data sheet on the subsequent pages of this document is a scanned copy of existing data for this product.

(Rating Report 87NR3 Issue 1)

This data reflects the old part number for this product which is: **SW02-15CXC400**. This part number must **NOT** be used for ordering purposes – please use the ordering particulars detailed below.

The limitations of this data are as follows:

Device no longer available for grade 02 (200V V_{RRM}/V_{DRM})

No reverse recovery information available

Please use the following link to view an up to date outline drawing for this device
[Outline W1](#)

Where any information on the product matrix page differs from that in the following data, the product matrix must be considered correct

An electronic data sheet for this product is presently in preparation.

For further information on this product, please contact your local ASM or distributor.

Ordering Particulars

W0797	WC	◆◆	0
Fixed Type Code	Fixed Outline Code	Voltage code $V_{DRM}/100$ 04-15	Fixed Code
Typical Order Code: W0797WC060, 14mm clamp height, 600V V_{RRM}			

IXYS Semiconductor GmbH
Edisonstraße 15
D-68623 Lampertheim
Tel: +49 6206 503-0
Fax: +49 6206 503-627
E-mail: marcom@ixys.de

IXYS Corporation
3540 Bassett Street
Santa Clara CA 95054 USA
Tel: +1 (408) 982 0700
Fax: +1 (408) 496 0670
E-mail: sales@ixys.net

WESTCODE
An  **IXYS** Company

www.westcode.com

www.ixys.com

Westcode Semiconductors Ltd
Langley Park Way, Langley Park,
Chippenham, Wiltshire, SN15 1GE.
Tel: +44 (0)1249 444524
Fax: +44 (0)1249 659448
E-mail: WSL.sales@westcode.com

Westcode Semiconductors Inc
3270 Cherry Avenue
Long Beach CA 90807 USA
Tel: +1 (562) 595 6971
Fax: +1 (562) 595 8182
E-mail: WSI.sales@westcode.com

The information contained herein is confidential and is protected by Copyright. The information may not be used or disclosed except with the written permission of and in the manner permitted by the proprietors Westcode Semiconductors Ltd.

© Westcode Semiconductors Ltd.

In the interest of product improvement, Westcode reserves the right to change specifications at any time without prior notice.

Devices with a suffix code (2-letter, 3-letter or letter/digit/letter combination) added to their generic code are not necessarily subject to the conditions and limits contained in this report.

QUALITY EVALUATION LABORATORY

Rating Report: 87NR3

Date: 25th March, 1987

Pages: 10

Diode Type SW02-15CXC400

Written by: *M.W. Junlop*

Checked: *M.W.*

Approved: *[Signature]*

This diode consists of a diffused 24mm diameter silicon slice mounted in a cold weld capsule housing.

This report supersedes Rating Report No. 79NR11.

Ratings

Voltage Grades	: 02-15
V_{RSM}	: 300-1600V
V_{RRM}	: 200-1500V
$I_F(AV)$: Single Phase; 50 Hz, 180° half sinewave;	
Double side cooled $T_{HS} = 55^\circ C, 100^\circ C$	: 800A, 614A
Single side cooled $T_{HS} = 100^\circ C$	: 380A
I_F (rms) max.)	: 1420A
) Double side cooled $T_{HS} = 25^\circ C$	
I_F max.)	: 1240A
I_{FSM} : t = 10ms half sinewave; T_J (initial) = 190°C;	
$V_{RM} = 0.6 V_{RRM}(Max)$	: 7500A
I_{FSM} ; t = 10ms half sinewave; T_J (initial = 190°C; $V_{RM} \leq 10V$	: 8250A
I^2t : t = 10ms; T_J (initial) = 190°C; $V_{RM} = 0.6 V_{RRM}(Max)$	: $0.281 \times 10^6 A^2 SECS$
I^2t : t = 10ms; T_J (initial) = 190°C; $V_{RM} \leq 10V$	: $0.34 \times 10^6 A^2 SECS$
I^2t : t = 3ms; T_J (initial) = 190°C; $V_{RM} \leq 10V$	: $0.245 \times 10^6 A^2 SECS$
T_{HS} Operating range	: -40 to +190°C
T_{stg} ; Non-operating	: -40 to +200°C

Characteristics

(Maximum values unless stated otherwise)

$V_O : T_J = 190^{\circ}\text{C}$	:	0.8V
$r_s : T_J = 190^{\circ}\text{C}$	:	0.548mohms
$V_{FM} : I_{FM} = 1930\text{A } T_{VJ} = 190^{\circ}\text{C}$	:	1.86V
$R_{th}(J-HS)$ Double side cooled	:	0.09°C/W
Single side cooled	:	0.18°C/W
$I_{RRM} : T_J = 190^{\circ}\text{C } V_{RM} = V_{RRM}(\text{Max})$	:	15mA
$Q_{rr} : I_{TM} = 1000 \text{ dI/dt} = 10\text{A/uS. Defined by chord through } 50\% I_{RM}$	:	500uC Typical
$V_{RM} = 50\text{V } T_{VJ} = 190^{\circ}\text{C}$	:	
Mounting Force	:	330-550Kgf
Outline drawing	:	100A241
Jedec Outline No.	:	D0200AA

CONTENTS

	<u>Page</u>
Ratings	1
Characteristics	2
Contents	3
Voltage Ratings	4
Dissipation and Heatsink Temperature vs Mean Current	5 & 6
Limit Forward Voltage Characteristic	7
Transient Thermal Impedance Characteristic	8
Surge Current and I^2t vs Duration of Surge	9
Outline Drawing	10

Changes to Rating Report No. 79NR11



- P1 : V_{RWM} omitted
 T_{HS} (MIN) reduced to -40°C
- P2 : JEDEC outline No. added
- P4 : V_{RWM} omitted
- P5-8 : Redrawn

Voltage Ratings



Voltage Class SW	V _{RRM}	V _{RSM} V
02	200	300
04	400	500
06	600	700
08	800	900
10	1000	1100
12	1200	1300
14	1400	1500
15	1500	1600


This report is applicable to higher or lower voltage grades when supply has been agreed by Sales/Production.

DOUBLE SIDE COOLED

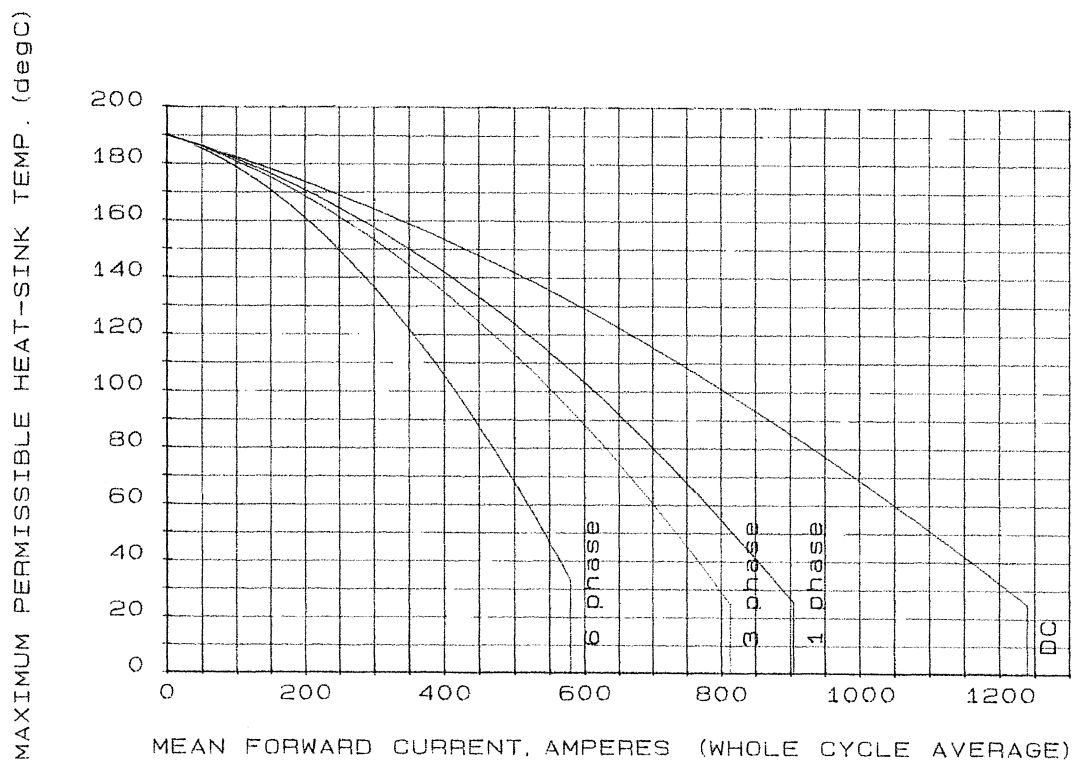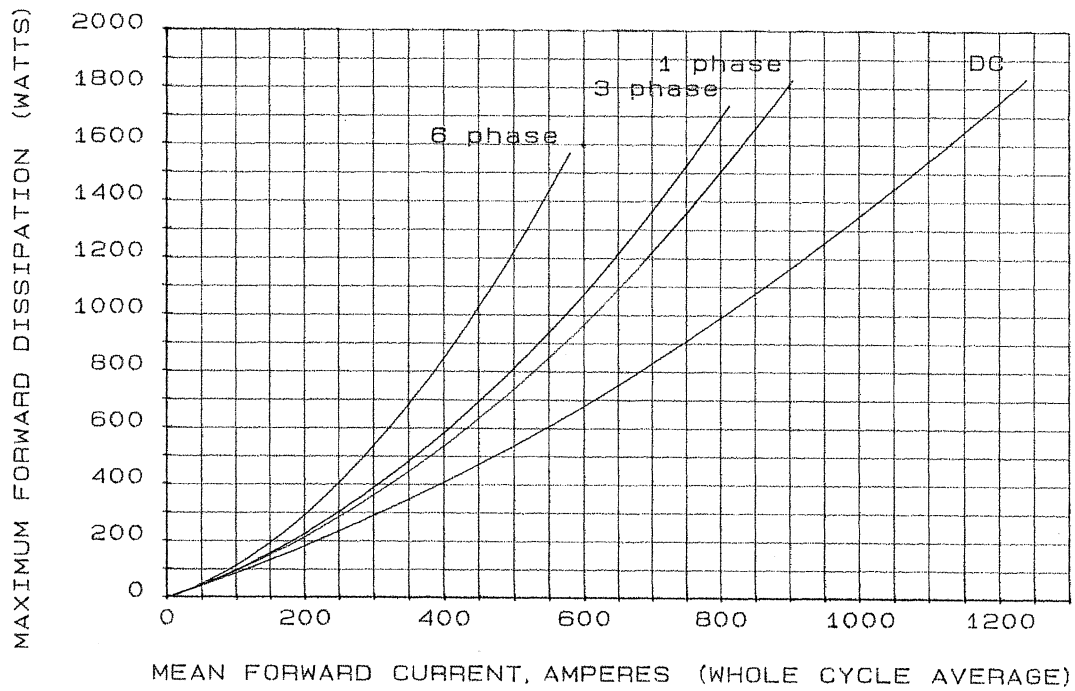


SINGLE SIDE COOLED

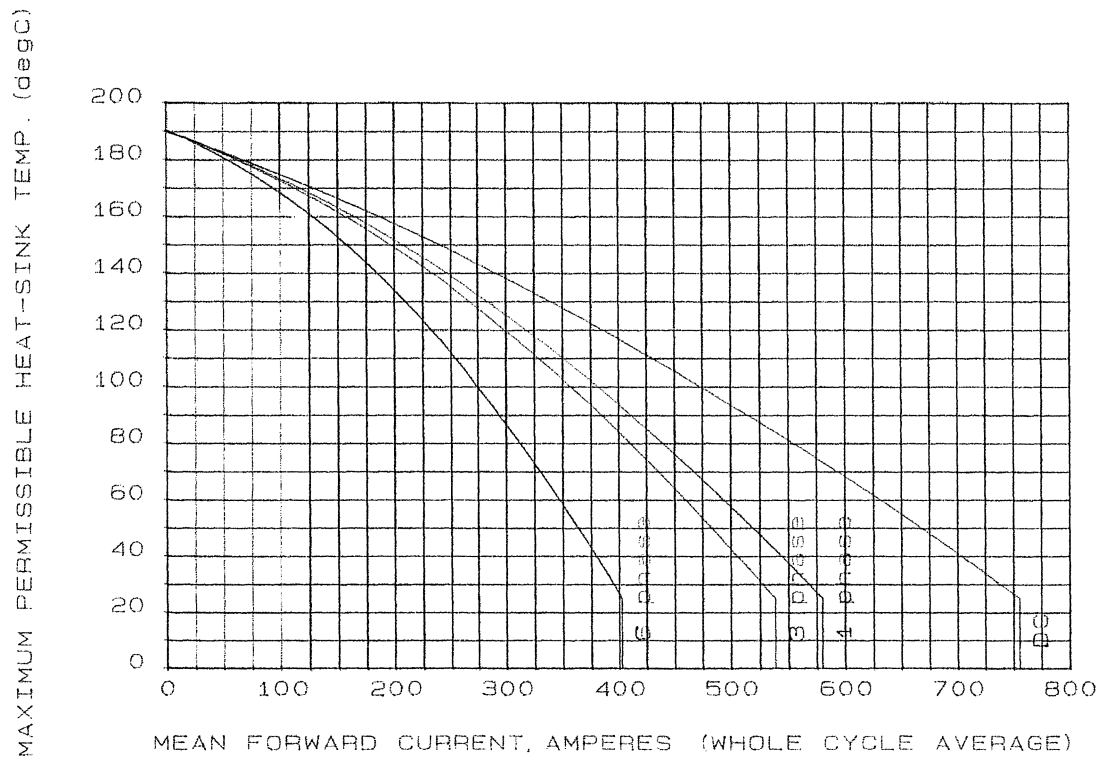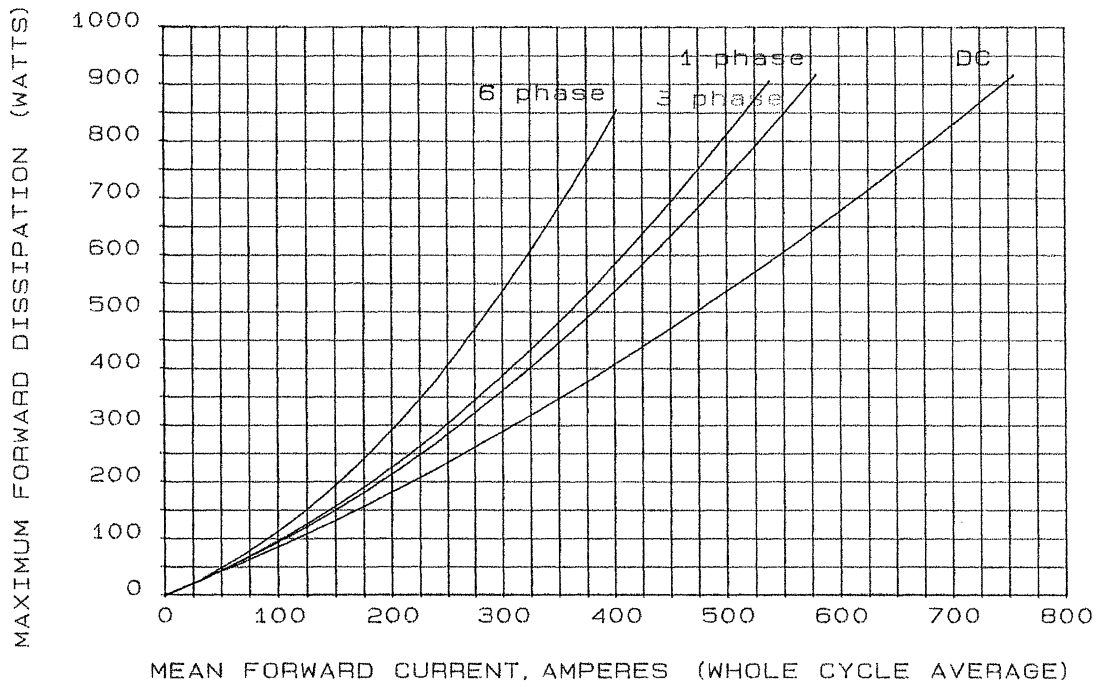


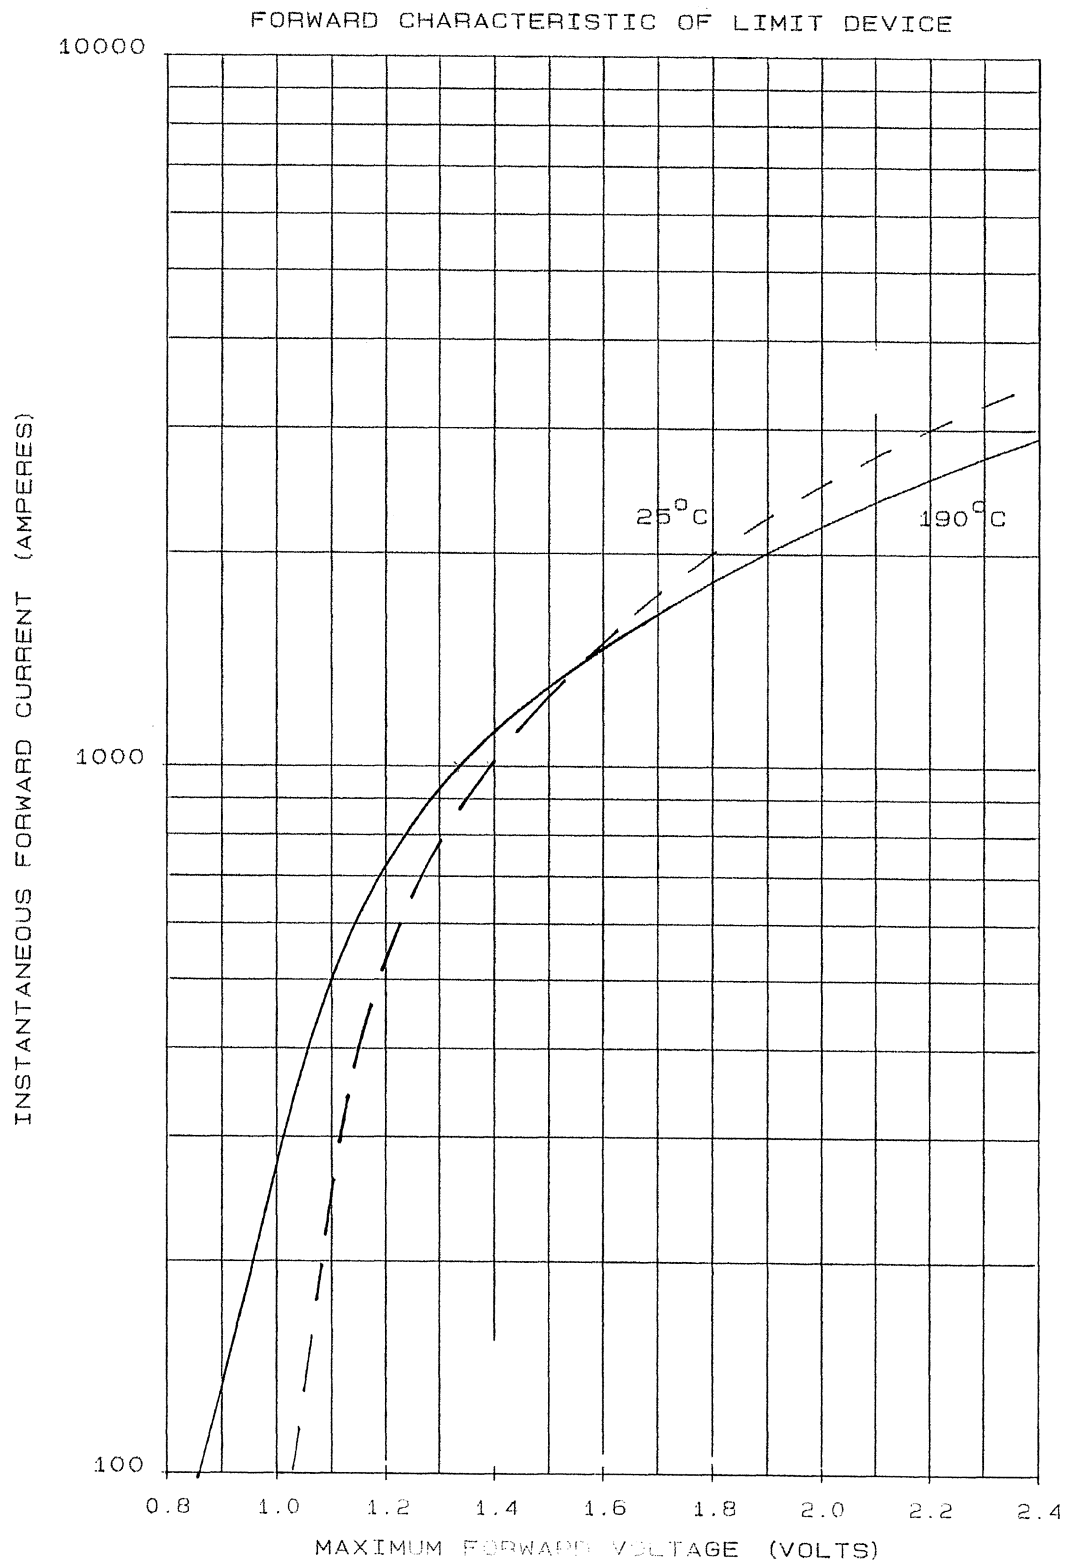

JUNCTION TO HEAT SINK TRANSIENT THERMAL IMPEDANCE

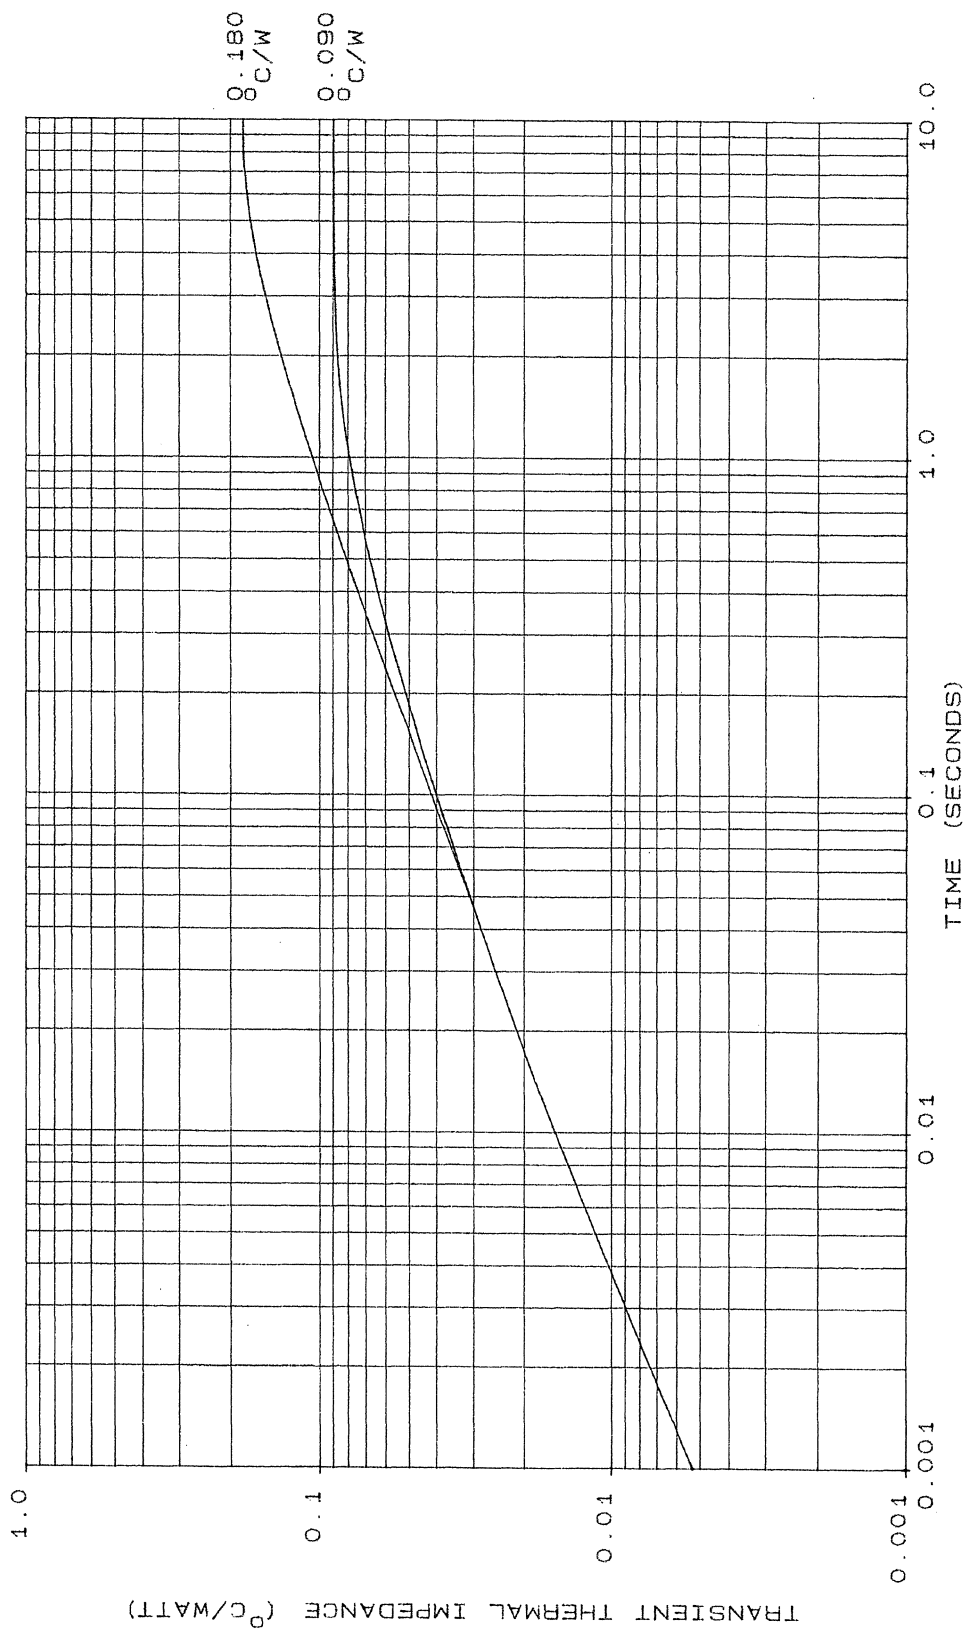

MAXIMUM NON REPETITIVE SURGE CURRENT AT INITIAL JUNCTION TEMPERATURE 190°C

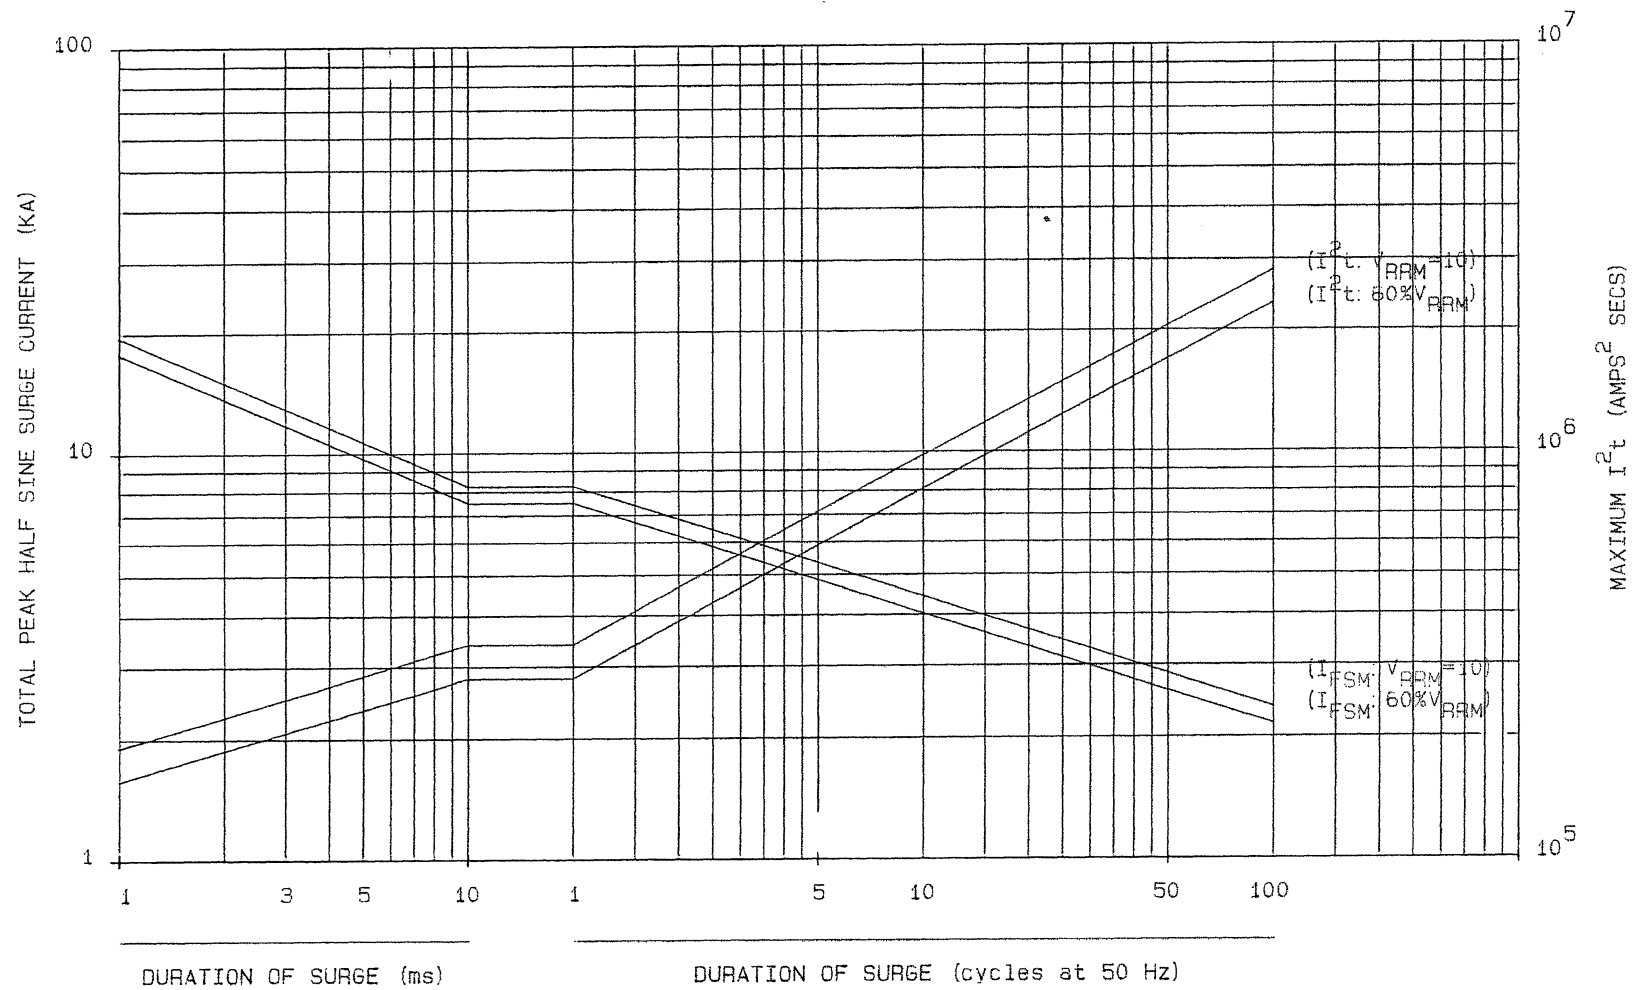

SCALE	1/1
DRN	<i>ll</i>
CHKD	<i>ll</i>
APPD	
A	
S	NI


INTERNATIONAL OUTLINE No. **DO-200AA.**
 WEIGHT. **70 GRAMS.**
 FINISH. **NICKEL PLATE.** - 10 -
 DEVICE MARKING INCLUDES MONOGRAM, TYPE No., SPEC. No. AND POLARITY SYMBOL.
 DEVICE MOUNTING: CLAMPING FORCE TO BE APPLIED ON Φ OF LOCATION HOLES AND BE EVENLY DISTRIBUTED OVER AREA OF CONTACT. FLAT TOL ON SURFACES TO WHICH DEVICE IS CLAMPED TO BE 0.04 WIDE.
 CLAMPING FORCE = 330 - 550 kgf.

CXC300
 CXC320
 CXC380
 CXC400


TYPE NUMBER

CXC170
 CXC174

G.A. DRG. No. **159B100H100-H110. 102B213.**

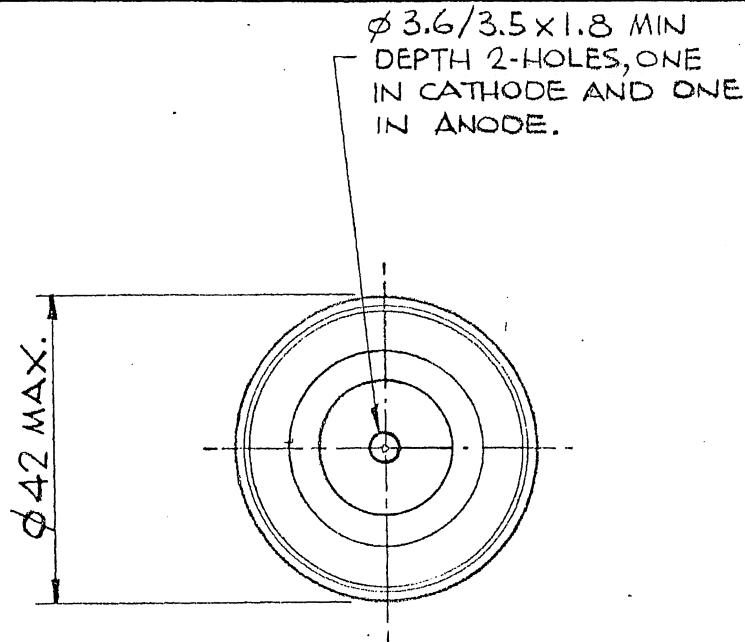

COMPRESSED HEIGHT.

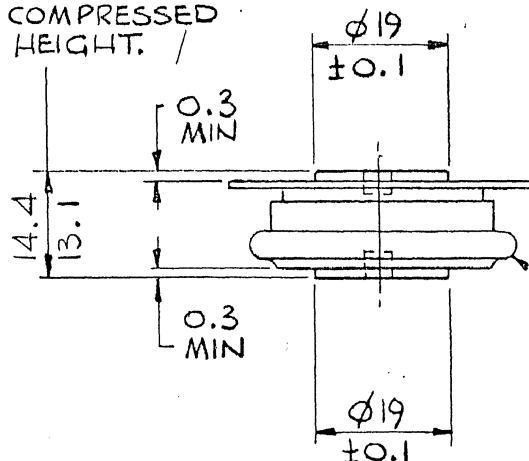


THE INFORMATION CONTAINED IN THIS DRAWING IS SUPPLIED IN CONFIDENCE AND IS PROTECTED BY COPYRIGHT. THE INFORMATION MAY NOT BE DISCLOSED EXCEPT WITH THE WRITTEN PERMISSION OF AND IN MANNER PERMITTED BY THE PROPRIETORS, WESTINGHOUSE BRAKE AND SIGNAL CO. LTD.

WESTINGHOUSE BRAKE AND SIGNAL CO. LTD.
 CHIPPENHAM, WILTSHIRE, SN15 1JD, ENGLAND.



WESTCODE®
 SEMICONDUCTORS

THIRD ANGLE PROJECTION




DIMNS. IN MILLIMETRES

DRG. No.

100A 241

ISS	REVISIONS	REVISIONS
1	10.9.76 P118	1
2	REDRAWN: 15.2 / 14 WAS 15.2/12.5. Ø19 WAS Ø29. P30.4 18.5.78	2
3	CLAMPING FORCE WAS 500-1200 kgf. 7.9.78	3
4	11.9.78 Ø42 WAS Ø43 14.35/13.08 WAS 15.2 / 14. CLAMP FORCE WAS 400-700 kgf. 19.9.78	4
5	14.4 / 13.1 WAS 14.35/13.08	5
6	30.10.78 M670 TYPE N° ADDED	6
7	17.9.79 M773 550 kgf WAS 700 kgf. 18	7

WESTCODE
An IXYS Company

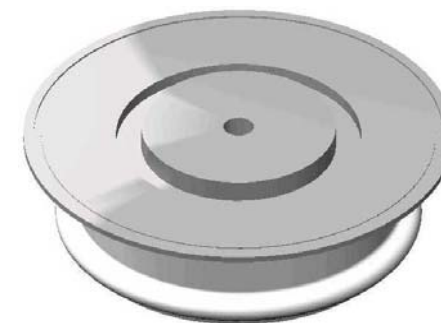

Westcode Customer Services email: wsl.sales@westcode.com Telephone: +44 (0)1249 444524 Fax: +44 (0)1249 659448