
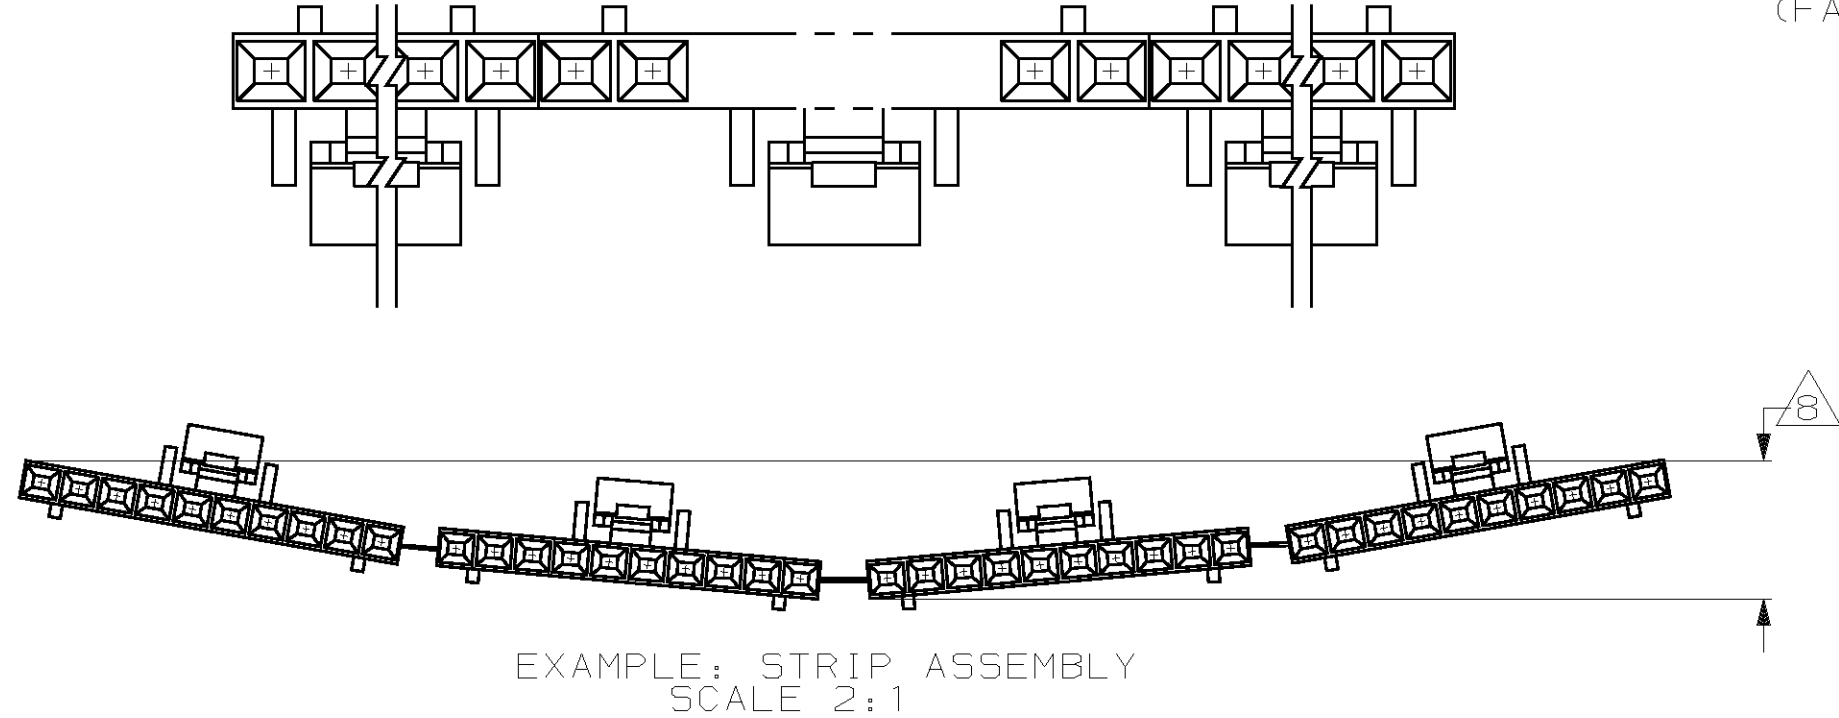


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION , 19 .
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	P	F	ZONE	LTR	REVISIONS	
						DESCRIPTION	DATE
AD	39					o RELEASED	-
						A REV ECN 1736	-
						B REV PER AR-2553	6-26-89
						C REV LOC & DIST AD-4171	3-90
						D REV PER 0010-0832-93	7-93
						E REV PER 0010-0782-93	2-16-94
						F REV PER 0010-1884-93	2-16-94
						G REV PER 0010-0652-94	5-16-94
						H REV PER 0010-1424-94	10-14-94
						J REV PER 063C-0290-00	20JUL00

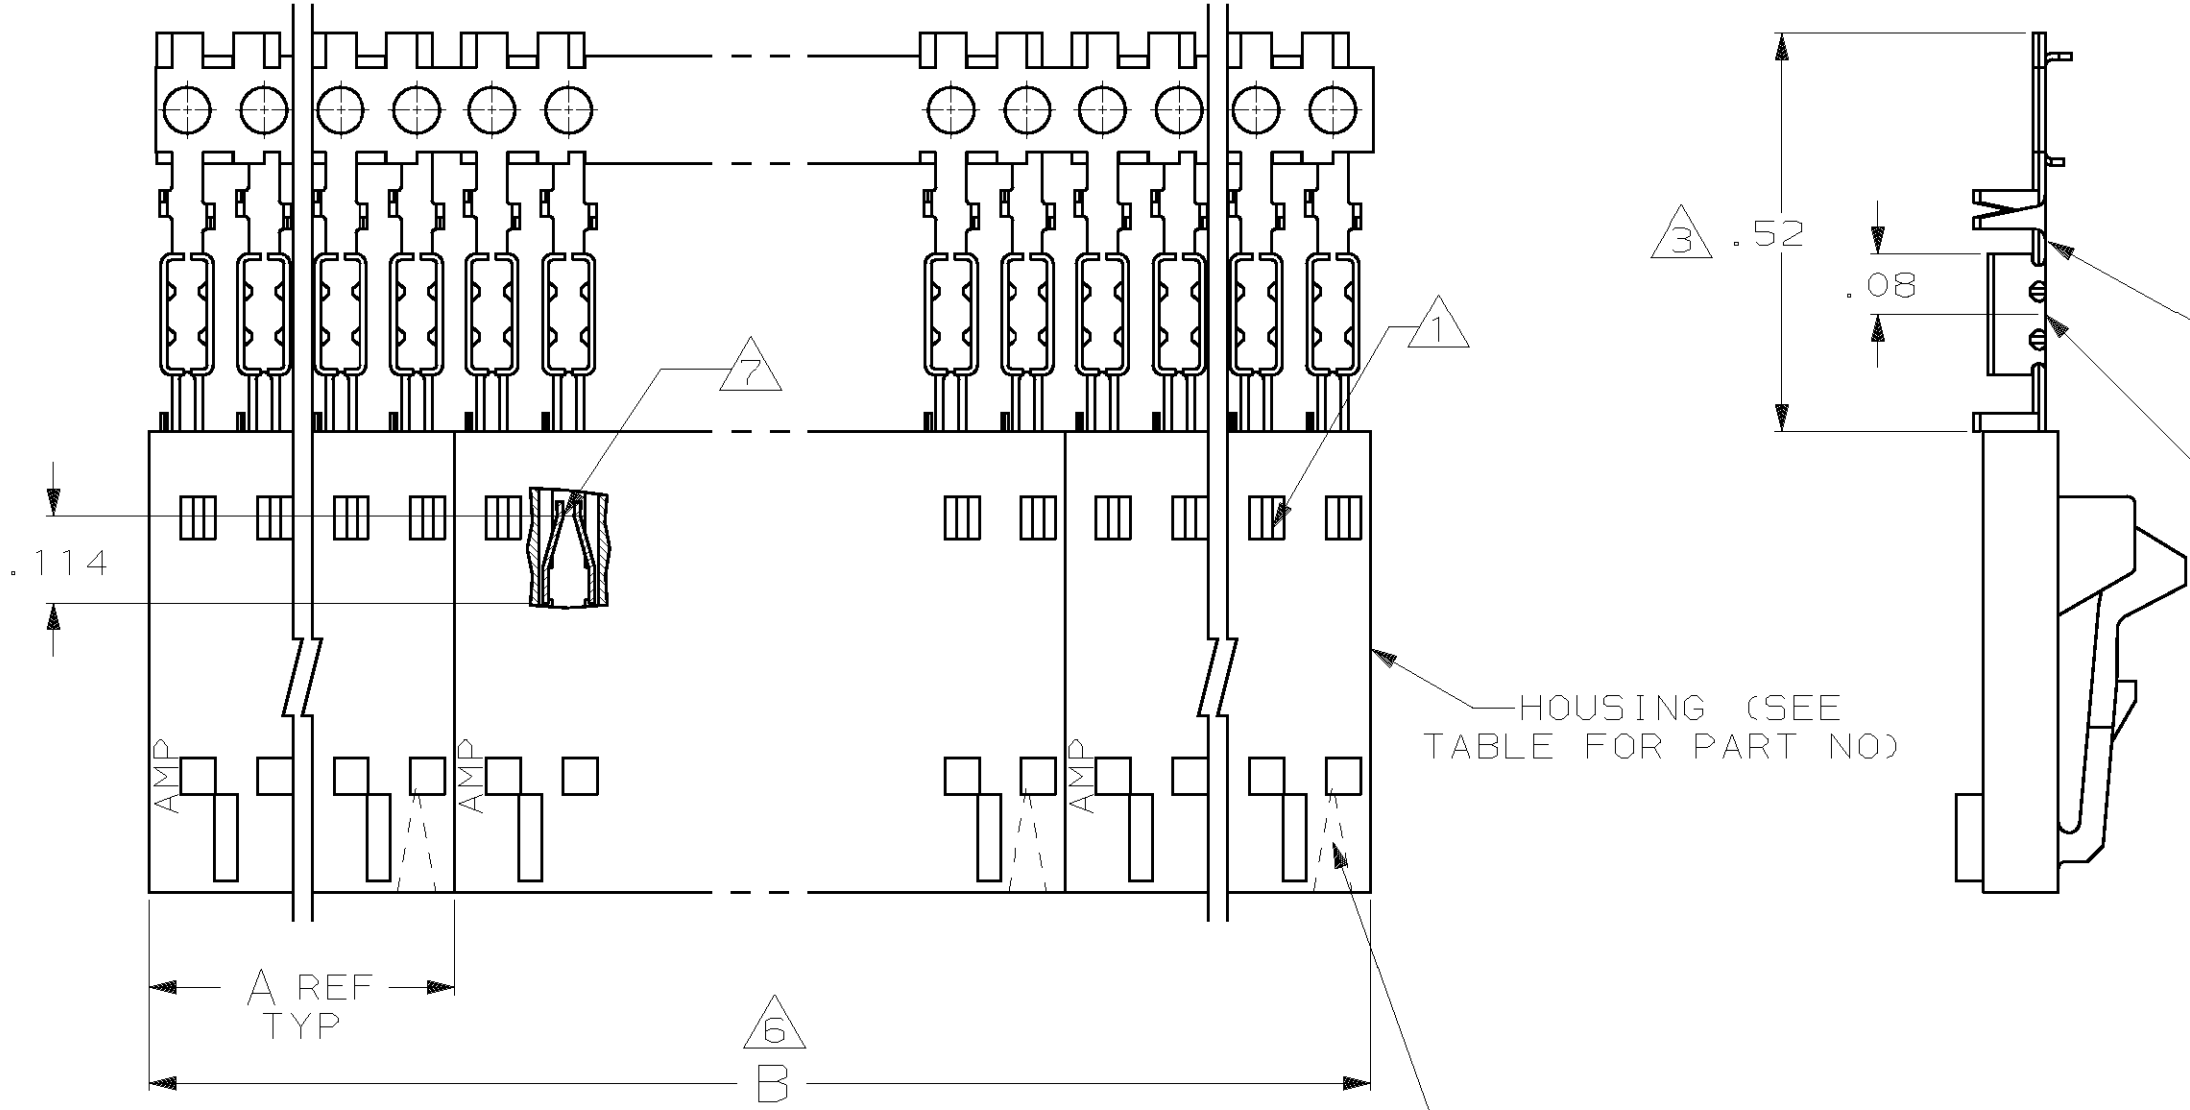

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103641
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.

2	2.40	1.198	1-104257-1	12	1-103959-1
2	2.20	1.098	1-104257-0	11	1-103959-0
2	2.00	.998	104257-9	10	103959-9
2	1.80	.898	104257-8	9	103959-8
2	1.60	.798	104257-7	8	103959-7
2	1.40	.698	104257-6	7	103959-6
4	2.39	.598	104257-5	6	103959-5
4	1.99	.498	104257-4	5	103959-4
5	1.99	.398	104257-3	4	103959-3
8	2.40	.298	104257-2	3	103959-2
10	2.00	.198	104257-1	2	103959-1
6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON :		DR 11-4-86 L A MAYER		AMP AMP INCORPORATED Harrisburg, Pa. 17105	
2 PL DEC ± .02 3 PL DEC ± .005 ANGLES ± -		CHK 11-12-86 P de Jong			
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK		APPD 11-12-86 P de JONG		NAME RCPT ASSY, AMPMODU® MTE, SINGLE ROW, .100¢, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE, STRIP FORM	
		APPD 11-13-16 J SCHIEFER			
CONTACTS: PH05 BRONZE		PRODUCT SPEC 108-25034		SIZE FSCM NO DRAWING NO	
FINISH: CONTACTS: .000100-.000200 TIN-LEAD OVER .000050 NICKEL		APPLICATION SPEC 114-25026		C 00779 103959	
		WEIGHT		SCALE 4:1 SHEET 1 OF 1	