


PART NAME NEMA 4X ENCLOSURE

PART No.






PN-1339, PN-1339-C AND PN-1339-DG

INDUSTRY STANDARDS:

POLYCARBONATE (LIGHT GRAY AND CLEAR)
UL94V-2 FLAMMABILITY RATING (UL FILE #E41613)
UV STABILIZED
SERVICE TEMPERATURE RANGE: -40°C TD +120°C
ABS (DARK GRAY)
UL94-HB FLAMMABILITY RATING (UL FILE #E56070)
SERVICE TEMPERATURE RANGE: -40°C TD +80°C

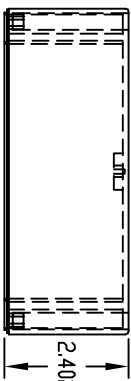

MOUNTING BOSSES USE EITHER
M2.5 METRIC OR #4 STD. SHEET
METAL SCREWS x 0.188" LG.
(NOT SUPPLIED)

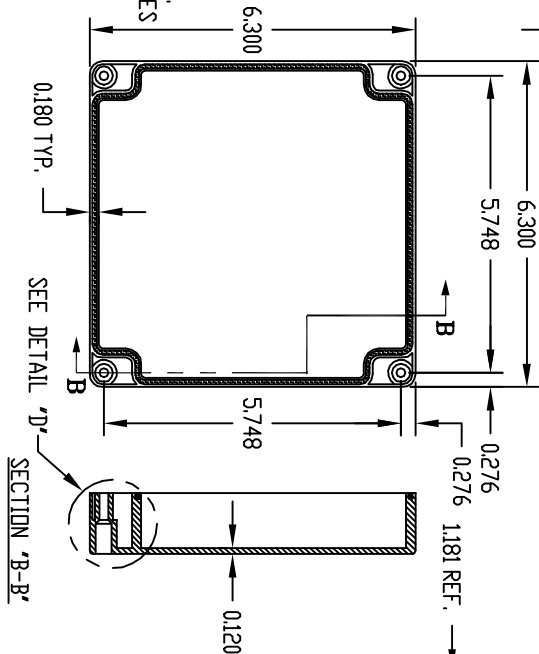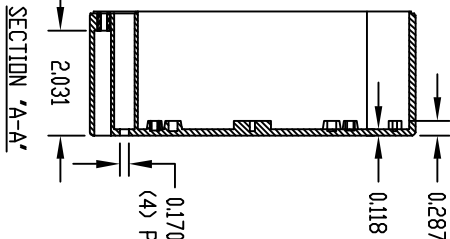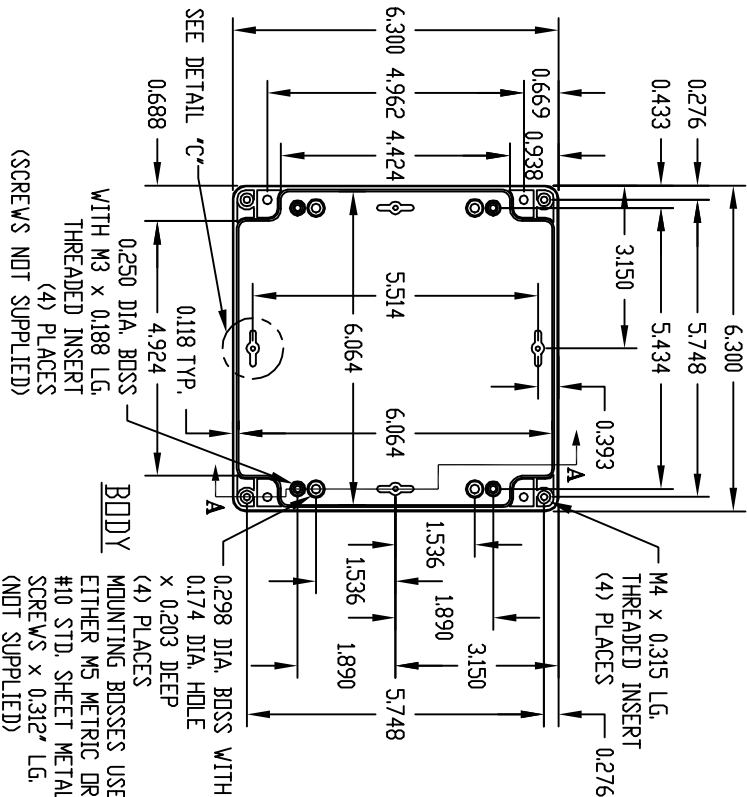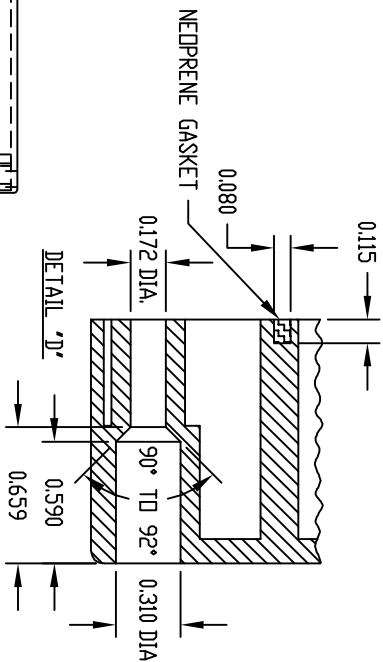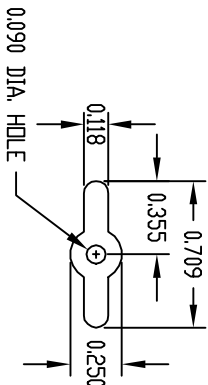

SEE DETAIL 'C'
0.118 TYP.
0.250 DIA. BOSS
WITH M3 x 0.188 LG.
THREADED INSERT
(4) PLACES
(SCREWS NOT SUPPLIED)

BODY
MOUNTING BOSSES USE
EITHER M5 METRIC OR
#10 STD. SHEET METAL
SCREWS x 0.312" LG.
(NOT SUPPLIED)

NOTE: ALL DIMENSIONS HAVE ±0.015 TOLERANCE UNLESS OTHERWISE SPECIFIED.

COVER

PART NUMBER	MATERIAL	FINISH	HARDWARE
PN-1339	POLYCARBONATE	LIGHT GRAY	KIT CONTAINS (4)
PN-1339-C	POLYCARBONATE	LIGHT GRAY	M4 x 20mm (0.787") LG.
PN-1339-DG	HIGH-IMPACT ABS	DARK GRAY	SCREWS FOR ASSEMBLY