


ELFP SERIES PART NUMBERING SCHEME

REV	ECN	APPD
-	3600	JEC 12/11/98
A	3865	

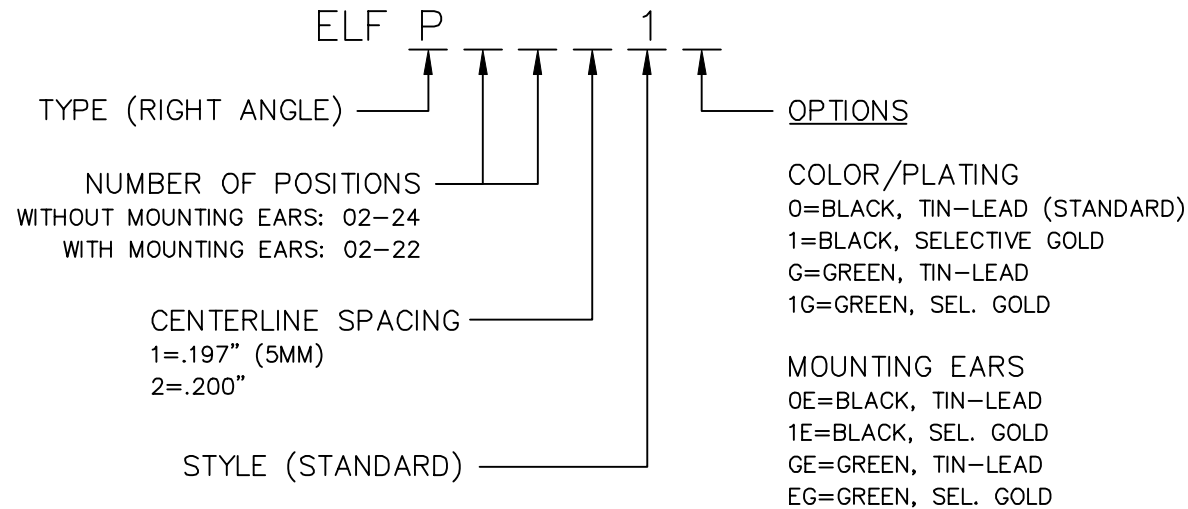

RATINGS

CURRENT - 15A
VOLTAGE - 300V
U.L. FILE NO. E83421



RATINGS

CURRENT - 15A
VOLTAGE - 300V
CSA FILE NO. LR69703




DIN VDE 0627:1986
DIN VDE 0110-1:1989
EN 60947-1:1991
EN 60947-7-1:1992


CURRENT - 15A
VOLTAGE - 300V
TUV FILE NO. 20396

INSTALLATION
RECOMMENDATIONS:
WIRE RANGE: AWG #14-26, STRANDED
OR SOLID; AWG #12 STRANDED
WIRE STRIP LENGTH: .310"
TIGHTENING TORQUE: 7 LB-IN.

MATERIALS:
HOUSING: PPO, UL 94 V-0
CONTACT: COPPER ALLOY, OPTIONAL FINISH
SCREW: STEEL, NICKEL FINISH
WIRE CLAMP: COPPER ALLOY, NICKEL FINISH




MAX OPERATING TEMPERATURE:
105°C

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ± 2°	PROJECTION 	SPECIFICATION DRAWING				TITLE ELFP SERIES PLUGGABLE TERMINAL BLOCK, RIGHT ANGLE			
			ENGR J. WILKINSON 11/8/99							
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		CHKD A. PATRIE 12/4/98		SIZE A	DWG NO. ELFP02110			REV A	
			APPD J CAHALY 12/11/98							
					CODE: 58982		SCALE: NONE	SHEET 1 OF 2		

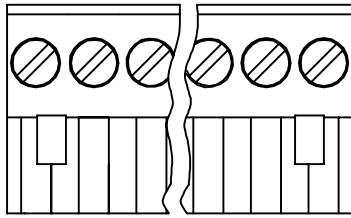



WITHOUT MOUNTING EARS

L=NUM OF POS X CL SPACING

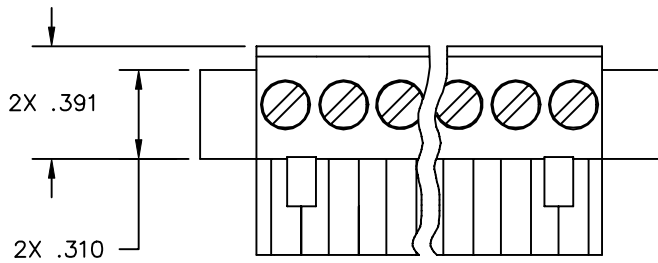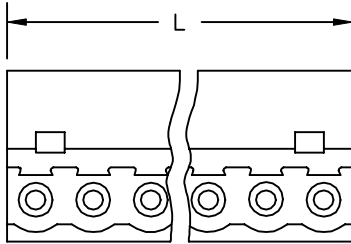

WITH MOUNTING EARS

L=NUM OF POS X CL SPACING

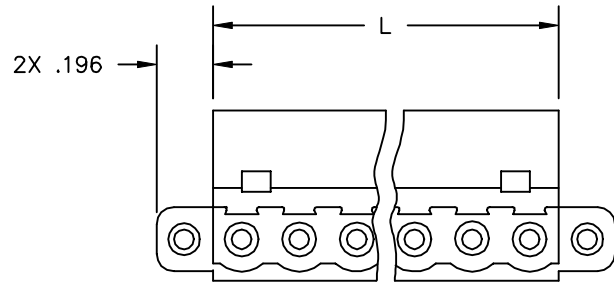

SIZE	DWG NO.	REV
A	ELFP02110	A
CODE: 58982	SCALE: NONE	SHEET 2 OF 2