

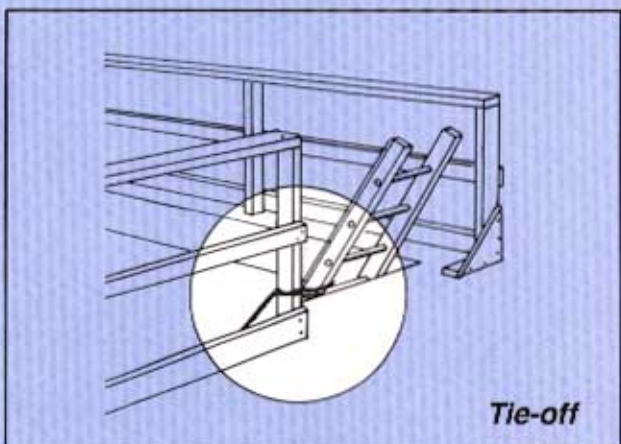
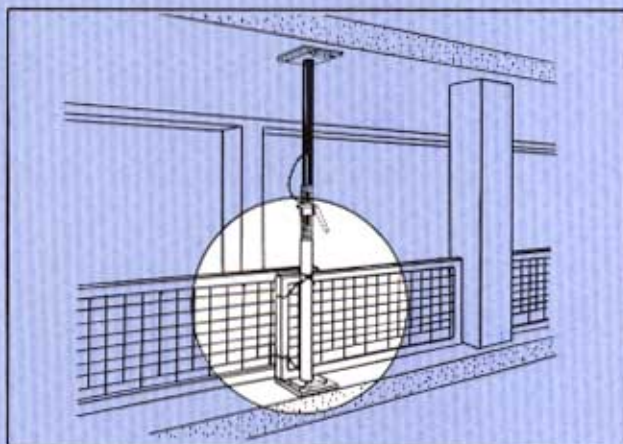
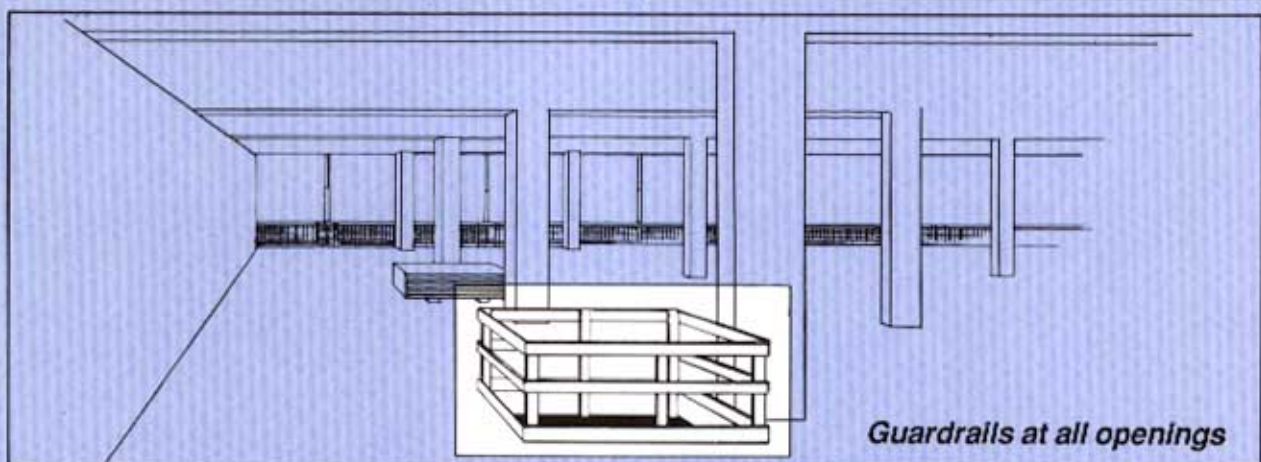
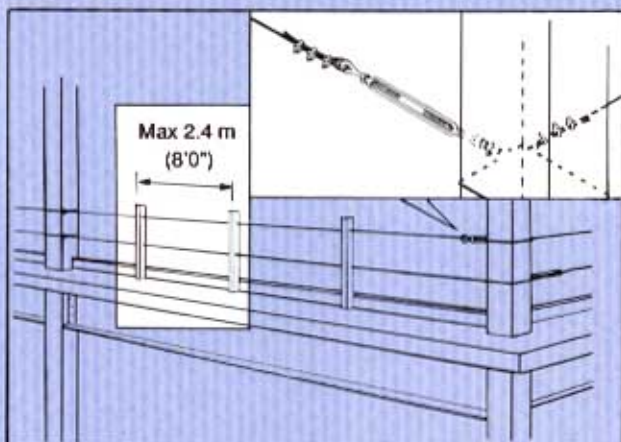
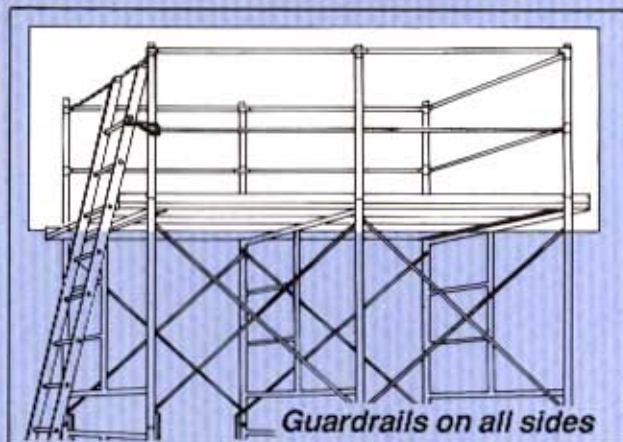
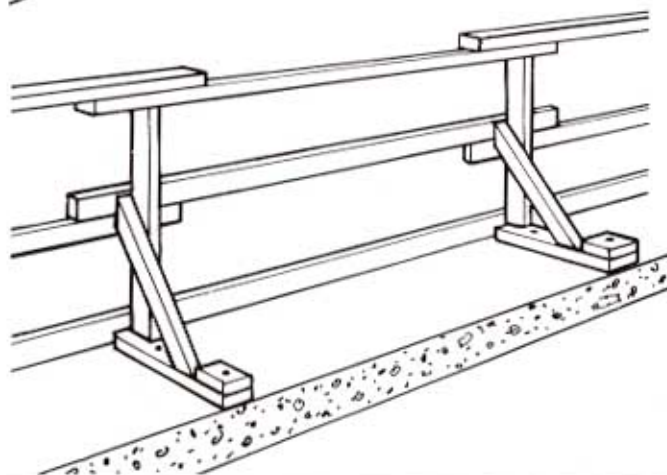


Safety Tips


GUARDRAIL PROTECTION

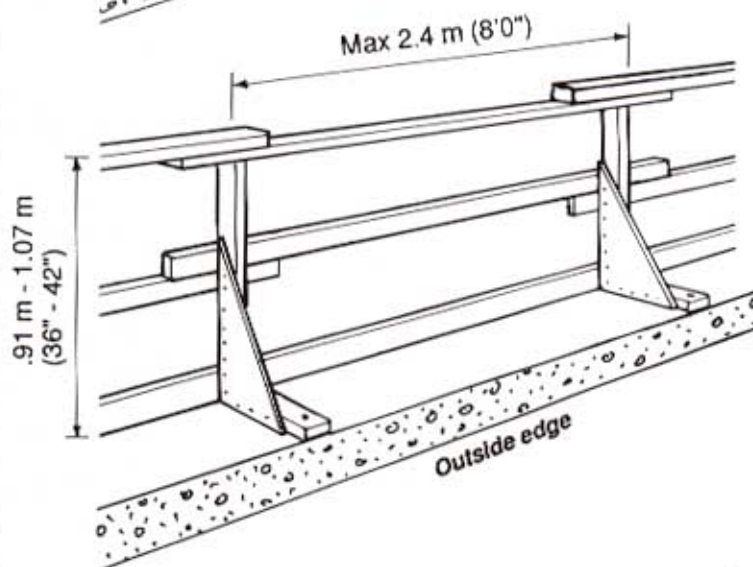

Three styles of wooden guardrails

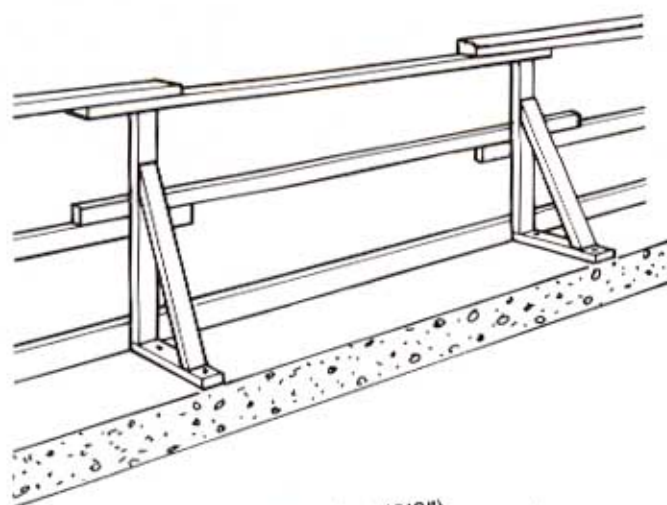

- ☐ Use guardrails along the open sides of any area where a worker can fall 2.4 metres (8 feet) or more.
- ☐ Install guardrails at the edges of
 - floors and floor openings
 - stairways and landings
 - roof tops
 - scaffold and other work platforms
 - runways and ramps
 - bridge surfaces.
- ☐ Secure components such as rails, toeboards, and panels to the **inside** of posts or jacks.
- ☐ Install toeboards on all open sides of a scaffold or work platform.
- ☐ When guardrails are temporarily removed, wear a safety belt or harness with the lanyard tied off to the structure or to a lifeline.

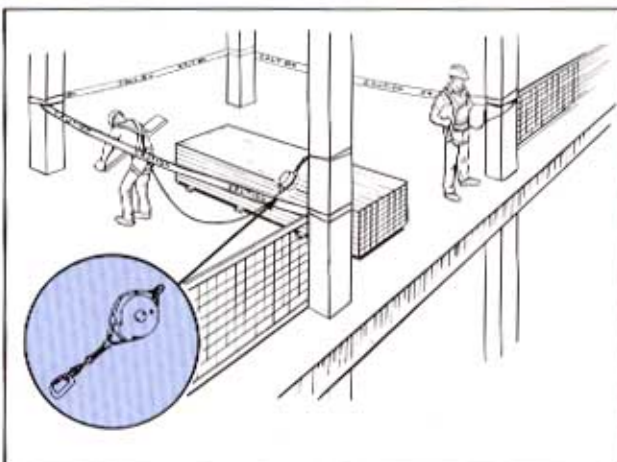

Construction Safety Association of Ontario
21 Voyager Court South, Etobicoke, Ontario M9W 5M7

(416) 674-2726
1-800-781-2726
Fax: (416) 674-8866