

Edgeport®

USB-to-Serial Converters

Easy out-of-the-box solution for I/O expansion is available in a wide variety of configurations for maximum flexibility and scalability.



Overview

Edgeport USB-to-serial converters offer instant I/O expansion for peripheral device connectivity. An out-of-the-box (external) alternative to PCI cards, Edgeport makes it easy to add serial, USB or parallel ports to a PC, server or thin client in minutes – without opening the chassis, reconfiguring or rebooting the system.

Edgeport is available in multiple configurations for maximum flexibility and scalability. Choose from compact form factors for space-prohibitive applications; single port “bump-in-the-cable” solutions for notebook expansion; software-selectable RS-232/422/485 models to connect any type of serial device to one box; metal enclosures for rugged applications; models with galvanic isolated ports for extended electrical safety; and DB-9, DB-25 or RJ-45 connectors to meet cabling requirements.

Feature-rich design, reliability and unmatched operating system support make Edgeport USB-to-serial converters ideal for mission-critical enterprise applications.

Target Applications



Industrial Automation




Retail/POS



Medical/Healthcare

Application Highlight

POS Connectivity

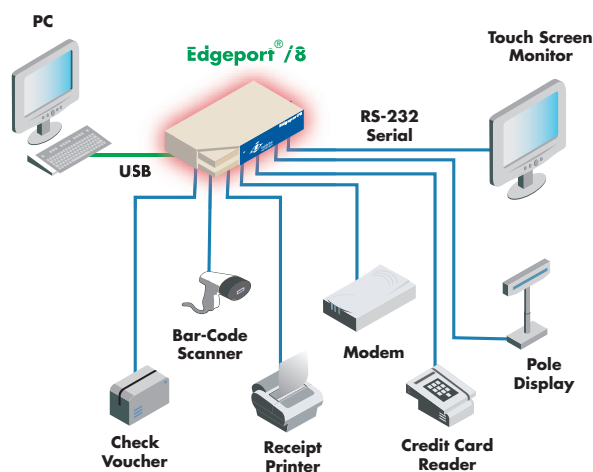

Features/Benefits

- Add 1, 2, 4, 8 or 16 serial ports to a PC, thin client or server in minutes
- Designed for peripheral device connectivity in retail stations, self check-out systems, emergency vehicles, kiosks, ATMs and more
- Multi-interface, software selectable MEI, galvanic isolated, USB PlusPower, industrial, compact and metal models
- Low total cost of ownership with external, user-installable solution
- EdgeUSB technology makes it possible to use Digi's USB products on Windows NT and Windows NT Embedded systems




Specifications	Edgeport® Serial	Edgeport® Multi-Interface	Edgeport® Extended Safety	Edgeport® Industrial
Interfaces (Varies by Model)				
Serial Ports	1, 2, 4, 8 or 16	2	4 (separately isolated)	1, 2, 4 or 8
Serial Type	RS-232	RS-232	RS-232/422/485	RS-232, RS-422, RS-422/485, software selectable RS-232/422/485
Serial Connector	DB-9, DB-25 or RJ-45	DB-9	DB-9	DB-9
Serial Data Rate	230 Kbps per port simultaneously			
Downstream USB Ports	4	4	1 (separately isolated)	0
Other Ports	–	1 parallel printer port	–	–
Features				
USB	USB 1.0 and USB 1.1 compatible; backwards compatibility for USB 2.0; USB-IF certified; Plug and Play			
LEDs	Tri-state LED displays device status and COM port activity			
Operating Systems	Windows Vista®, Windows Server® 2008, Windows XP®, Windows® XP Embedded, Windows NT® 4.0, Windows NT Embedded, Windows CE, Windows Server® 2003, Windows 2000; Linux; Sun Solaris (SPARC)			
Cables	1-meter USB cable			
Other (General)	Automatic port reacquisition; COM port assignments maintained across reboots; Full hardware and software flow control; No additional IRQ or memory address requirements; Low power consumption; Rack mountable; Hot-swappable; Bulk packaging and customized cabling options			
Other (Model-Specific)	–	–	2.0 kV DC galvanic isolation on all ports	–
Power Requirements				
Power Supply	External power supply not required for models without USB ports (USB powered); Models with USB ports (Edgeport/421, Edgeport 416) ship with plug-mounted power supply: 120/230VAC 60/50 Hz at 5VDC @ 3 Amps max			
Environmental				
Operating Temperature	0° C to 55° C (32° F to 131° F)			
Relative Humidity	0% to 95% (non-condensing)			
Regulatory Approvals				
Safety	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950			
Emissions/Immunity	CE, FCC Part 15 Class B, EN55022, EN55024			

Specifications	Edgeport® Compact	Edgeport® Metal	Edgeport® USB PlusPower
Interfaces (Varies by Model)			
Serial Ports	2	2 or 4	2
Serial Type	RS-232	RS-232	RS-232
Serial Connector	DB-9		
Serial Data Rate	230 Kbps per port simultaneously		
Downstream USB Ports	2	0	4 USB PlusPower (powered USB)
Other Ports	–	–	2 RS-232 DB-9
Features			
USB	USB 1.0 and USB 1.1 compatible; backwards compatibility for USB 2.0; USB-IF certified; Plug and Play		
LEDs	Tri-state LED displays device status and COM port activity		
Operating Systems	Windows Vista®, Windows Server® 2008, Windows XP®, Windows® XP Embedded, Windows NT® 4.0, Windows NT Embedded, Windows CE, Windows Server® 2003, Windows 2000; Linux; Sun Solaris (SPARC)		
Cables	Captive 2-meter cable for secure connection in rugged environments (mobile computing)	1-meter USB cable	
Other (General)	Automatic port reacquisition; COM port assignments maintained across reboots; Full hardware and software flow control; No additional IRQ or memory address requirements; Low power consumption; Rack mountable; Hot-swappable; Bulk packaging and customized cabling options		
Other (Model-Specific)	–	Aluminum chassis; Designed for rugged environments (emergency vehicles, restaurant kitchens); Rack mount bracket for added security	See USB Plus Series datasheet for more information
Power Requirements			
Power Supply	USB powered		Ships with plug-mounted power supply: 120-240VAC 60/50 Hz at 24VDC@3 Amps max
Environmental			
Operating Temperature	0° C to 55° C (32° F to 131° F)		
Relative Humidity	0% to 95% (non-condensing)		
Regulatory Approvals			
Safety	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950		
Emissions/Immunity	CE, FCC Part 15 Class B, EN55022, EN55024		

Measurements

	Edgeport/1, 1i Length: 3.15 in (8.00 cm) Width: 1.75 in (4.40 cm) Height: 0.80 in (2.03 cm) Weight: 1.60 oz (45.36 g)
	Edgeport/2m, 4m Length: 4.30 in (10.92 cm) Width: 8.00 in (20.32 cm) Height: 1.36 in (3.45 cm) Weight: 10.00 oz (311.00 g)
	Edgeport/2c, 22c Length: 2.38 in (6.04 cm) Width: 3.94 in (10.00 cm) Height: 1.00 in (2.54 cm) Weight: 5.00 oz (141.75 g)
	Edgeport/416, 416/DB-25, 8/DB-25 Length: 5.00* in (12.70 cm) Width: 17.00** in (43.18 cm) Height: 1.80 in (4.53 cm) Weight: 41.30 oz (1170.84 g)
	Edgeport/4/DB-25, 42+, 8, 8s MEI Length: 4.35 in (11.05 cm) Width: 7.20 in (18.29 cm) Height: 1.75 in (4.45 cm) Weight: 16.00 oz (453.59 g)
	Edgeport/2, 2i, 21, 4, 4s MEI, 4s MEI Isolated, 421, 8r Length: 4.35 in (11.05 cm) Width: 7.20 in (18.29 cm) Height: 1.03 in (2.61 cm) Weight: 10.00 oz (311.00 g)

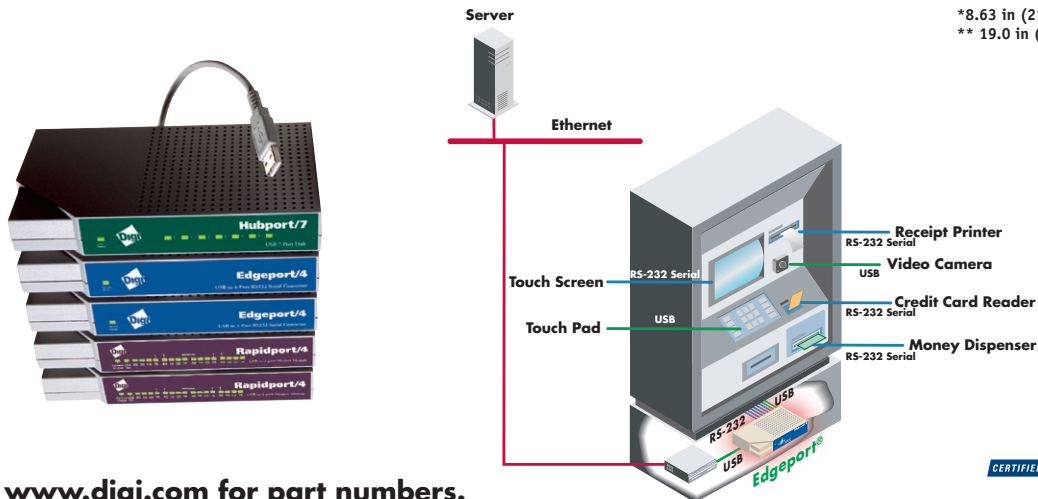

*8.63 in (21.92 cm) with optional mounted power supply tray
** 19.0 in (48.26 cm) with optional rack mount ears

Visit www.digi.com for part numbers.



DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

Digi International France
+33-1-55-61-98-98
www.digi.fr

Digi International KK
+81-3-5428-0261
www.digi-intl.co.jp

Digi International (HK) Limited
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digi.com

© 2003-2009 Digi International Inc.

All rights reserved. Digi, Digi International, the Digi logo, Edgeport and Watchport are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.



91001226
E1/909