

DURACELL®

Zinc Air Battery

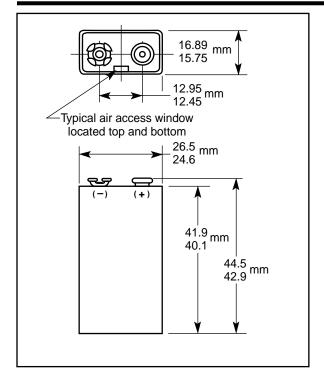

| | _ |
|------------------------------|--|
| Nominal Voltage: | 8.4 V |
| Rated Capacity: | 1,500 mAh at 1,300 ohm to 6.0 V at 21°C (70°F) |
| Nominal Internal Impedance: | 12 ohm @ 1kHz |
| Average Weight: | 34.03 gm |
| Volume: | 17.86 cm ³ |
| Terminals: | Snap |
| Operating Temperature Range: | 0°C to 50°C (32°F to 122°F) |
| ANSI: IEC: | 7004 Z - |

Typical Discharge Characteristics at 21°C (70°F)

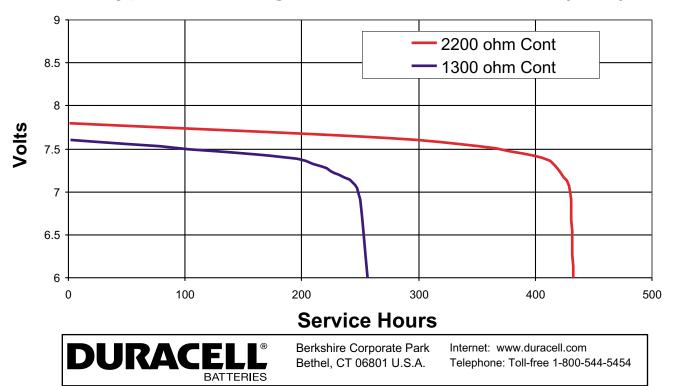

^{*} Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.