


DURACELL®

Lithium/Manganese Dioxide Battery



PX28L

Li/MnO<sub>2</sub>

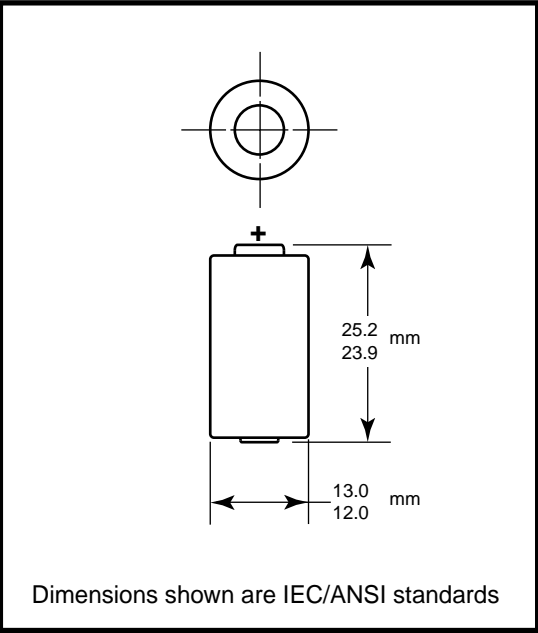

Nominal Voltage:	6.0 V
Typical Voltage:	6.0-6.6 V
Nominal Internal Impedance:	0.7 ohm @ 1kHz
Average Weight:	9.4 gm
Volume:	2.8 cm <sup>3</sup>
Terminals:	Flat, cap and base
Operating Temperature Range:	-20°C to 60°C (-4°F to 140°F)
NEDA/ANSI:	1406LC
IEC:	2CR11108

Typical Discharge Characteristics

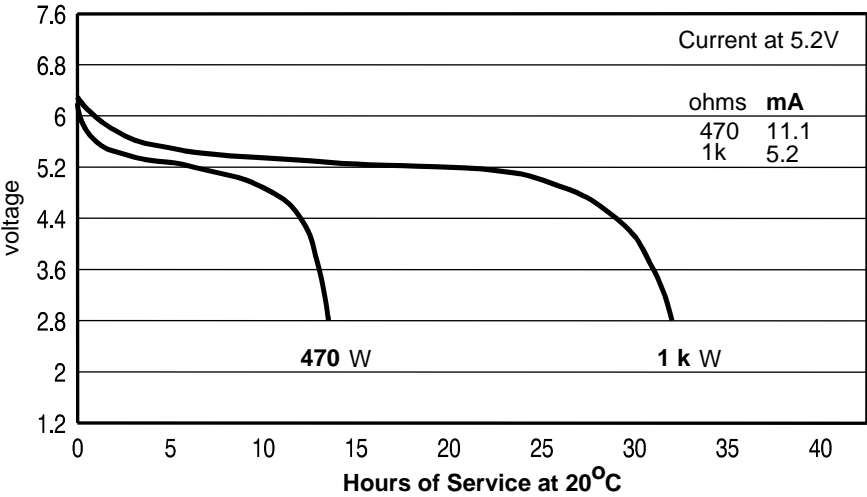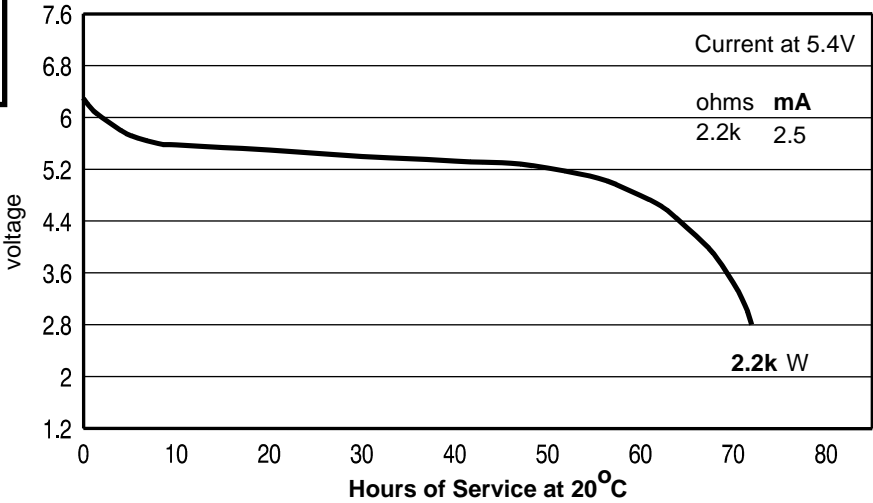

Typical Discharge Characteristics

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.