

DURAVALVE

ELECTRIC ACTUATORS



DURAVALVE ELECTRIC ACTUATORS

Features and Specifications



FEATURES

- **10 sizes**
- **Torque:** 100-5000 In-Lbs.
- **Enclosures:**
NEMA 4 Watertight Standard
NEMA 7 Explosion Proof Optional
- **Materials:**
Enclosure - Cast aluminum with a thermally bonded polyester powder coating.
Output Shaft - Stainless Steel
Fasteners - Stainless Steel

- **Voltages:**
115 VAC, 60 Hz, 1 PH. PSC — Standard
240 and 24 VAC — Optional
12 and 24 VDC — Optional
Thermal overload protection — Standard
Wired for light indication — Standard
- **Limit Switches:**
Two SPDT, Independently adjustable from 0 to 90 degrees
15A, 1/2 HP 125, 250 VAC 0.5A, 125 VDC
- **Terminal Strip Connection:** AWG 14
- **Lubrication:** Permanent
- **Installation:** Universal
- **Temperature Limits:**
-40 degrees F. to 150 Degrees F.
(Heater required at 0 degrees F. and below.)
- **CSA Certified:** Models through 3,840 In-Lbs.

OPTIONAL FEATURES

Voltages, heater-thermostat, additional limit switches, motor brake (required for butterfly valves), extended duty motors.

Note: Not All Options Available On All Models.


SPECIFICATIONS

Actuator Model	Output Torque (in-lb)	Duty Cycles	Standard Motor	90 Deg. Time Sec.	Locked Rotor Current/Amps	Manual Override	ISO-5211 Mtg. Pattern	Approximate Weight lbs.
DR-2A	100	75%	115 VAC, 60Hz, 1 Ph. PSC	2.5	.55	STD. (Except NEMA 7 & DC Motors)	F03/09	5
DR-2B	100	75%	115 VAC, 60Hz, 1 Ph. PSC	2.5	.55	STD. (Except NEMA 7 & DC Motors)	F04/11	5
DSR-5	200	25%	115 VAC, 60Hz, 1 Ph. PSC	5	.75	STD. (Except DC Motors)	F05/14	6
DSX-5	300	25%	115 VAC, 60Hz, 1 Ph. PSC	5	.99	STD. (Except DC Motors)	F05/14	6
DSH-10	400	25%	115 VAC, 60Hz, 1 Ph. PSC	10	.75	STD. NEMA 4 (Optional NEMA 7)	F07/17	13 (NEMA 7 16)
DMR-15	675	25%	115 VAC, 60Hz, 1 Ph. PSC	15	.75	STD. NEMA 4 (Optional NEMA 7)	F07/17	13 (NEMA 7 16)
DML-15	1000	25%	115 VAC, 60Hz, 1 Ph. PSC	15	1.1	STD. NEMA 4 (Optional NEMA 7)	F07/17	13 (NEMA 7 16)
DMH-30	1500	25%	115 VAC, 60Hz, 1 Ph. PSC	30	1.1	STD. NEMA 4 (Optional NEMA 7)	F07/17	13 (NEMA 7 16)
DLA-12	2000	100%	115 VAC, 60Hz, 1 Ph. PSC	12	1.5	STD.	SAE	30
DLX-14	3840	100%	115 VAC, 60Hz, 1 Ph. PSC	14	2.9	STD.	SAE	30
D5K-68	5000	100%	115 VAC, 60Hz, 1 Ph. PSC	68	2.9	STD.	SAE	100




Dimensional Drawings

DR-2A & DR-2B

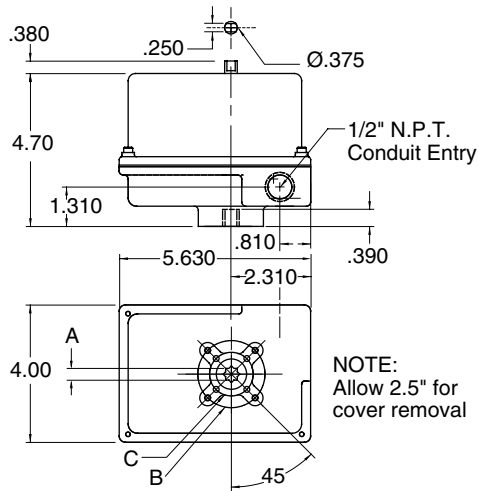

Model	ISO-5211 Mtg. Pattern	A	B	C
DR-2A	F03	0.354 Star (9mm)	4, M5 TAP 0.44 DP. 1.968 B.C.	4, M5 TAP 0.44 DP. 1.417 B.C.
DR-2B	F04	0.433 Star (11mm)	4, M5 TAP 0.44 DP. 2.121 B.C.	4, M5 TAP 0.44 DP. 1.653 B.C.

DSH-10, DMR-15, DML-15 & DMH-30

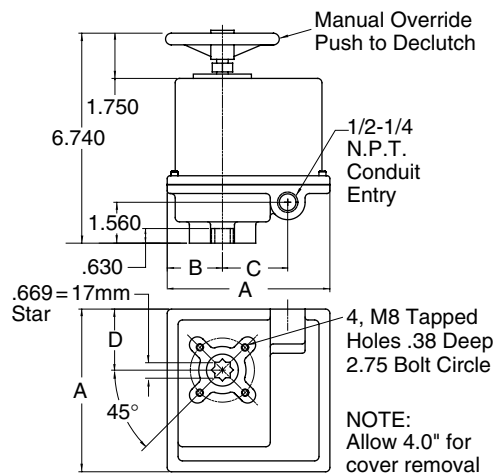


ISO-5211 - F07 Mounting Pattern

Enclosure	A	B	C	D
NEMA 4	7.0	2.30	2.81	2.63
NEMA 7	8.5	3.13	2.81	3.38


Note:
All dimensions in inches unless otherwise specified.

DSR-5 & DSX-5

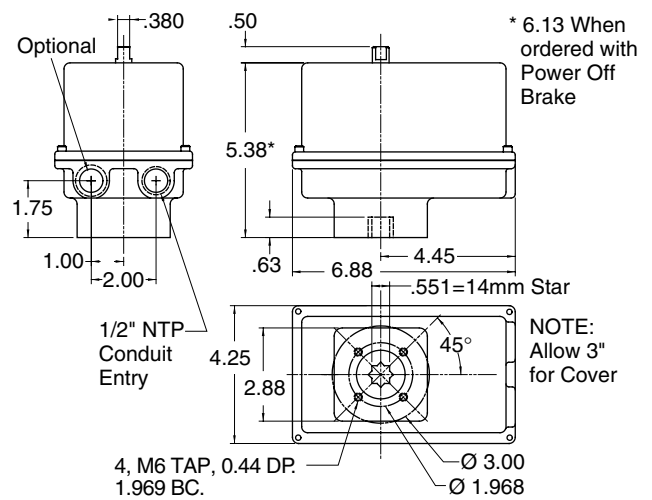


ISO-5211 - F05 Mounting Pattern

DLA-12 & DLX-14

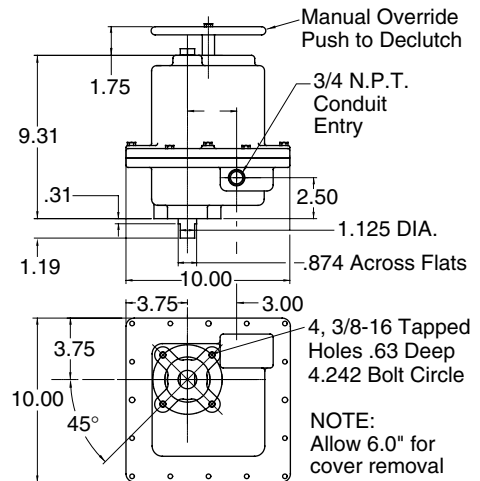


D5K-68

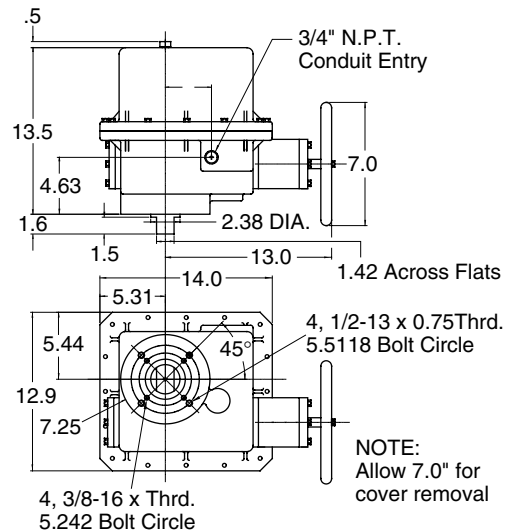


DURAVALVE ELECTRIC ACTUATORS

Wiring Diagrams

TYPICAL WIRING DIAGRAM

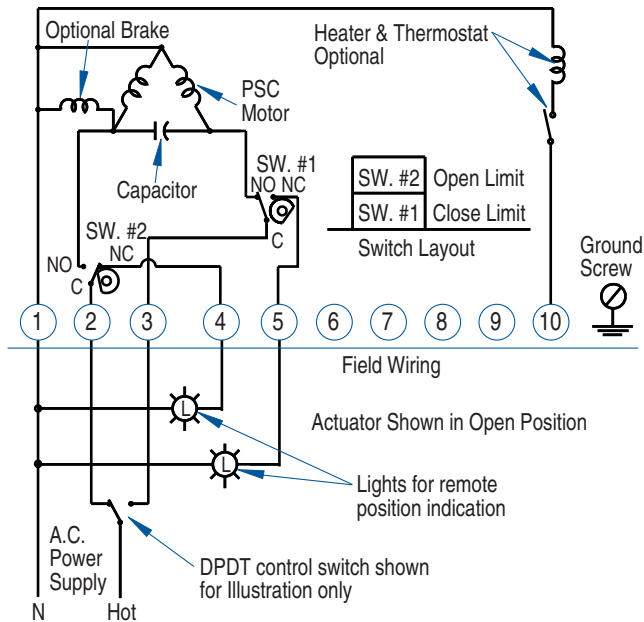

TYPICAL WIRING DIAGRAM with TWO AUXILIARY SWITCHES

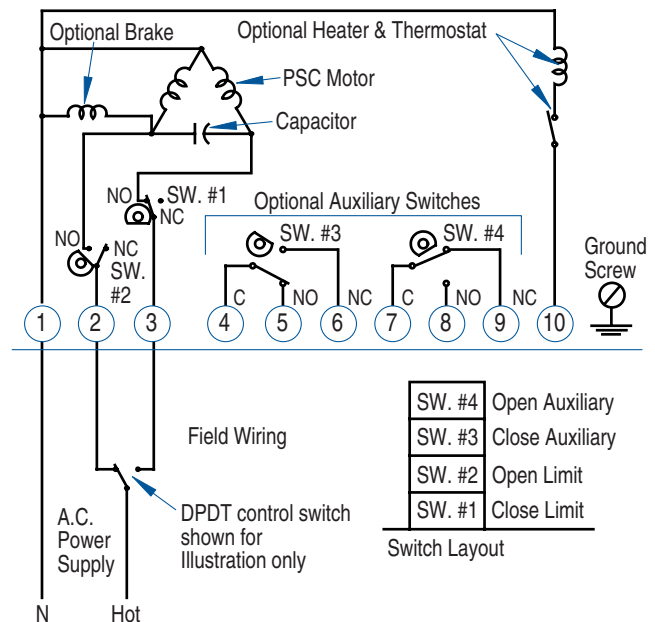

Wiring diagram illustrates the actuator in the open position
actuators are shipped in the open position unless otherwise specified.

Ordering Information

When ordering please specify:

1. Model
2. Actuator Electrical Requirements
 - a) Voltage
 - b) Hertz
 - c) Phase
3. Enclosure Type
 - a) NEMA 4
 - b) NEMA 4X
 - c) NEMA 7
 - d) NEMA 4 & 7
4. Optional Equipment Required

Note: The right is reserved to change or modify product design or construction without prior notice and without incurring any obligation to make such changes or modifications on products previously or subsequently sold.

DVEA 12-06



Phone: 847-616-0430
Toll Free: 800-776-1260
FAX: 847-616-0432
www.duravalve.com