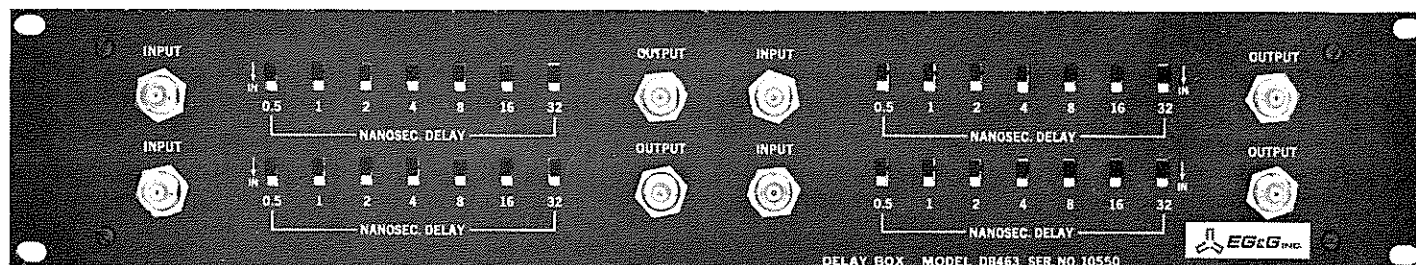


Hall A

DB463


The EG&G ORTEC DB463 furnishes a 50- Ω calibrated cable delay, providing relative delays from 0 to 63.5 ns increments in each of four identical sections. Longer delays may be achieved by cascading several DB463 Delay Box sections.

The DB463 is convenient for aligning fast timing channels that incorporate coincidence circuits or time-to-amplitude converters.

SPECIFICATIONS

INPUTS (4) 50 Ω ; either polarity; 1500 V maximum.

OUTPUTS (4) 50 Ω ; delay between In and Out is sum of delays.

DELAY TIMES 0.5, 1, 2, 4, 8, 16, and 32 ns.

DELAY ACCURACY $\geq \pm 0.1$ ns or $\pm 1.0\%$ for each switch, whichever is greater.


REFLECTIONS $< 3\%$ at any delay setting for 1 ns rise time step.

CABLE RG-58A/U.

WEIGHT

Shipping 4.0 kg (9 lb).

DIMENSIONS 48.2 cm (19 in.) wide for relay rack mounting, 8.9 cm (3.5 in.) high, and 20.3 cm (8 in.) deep.

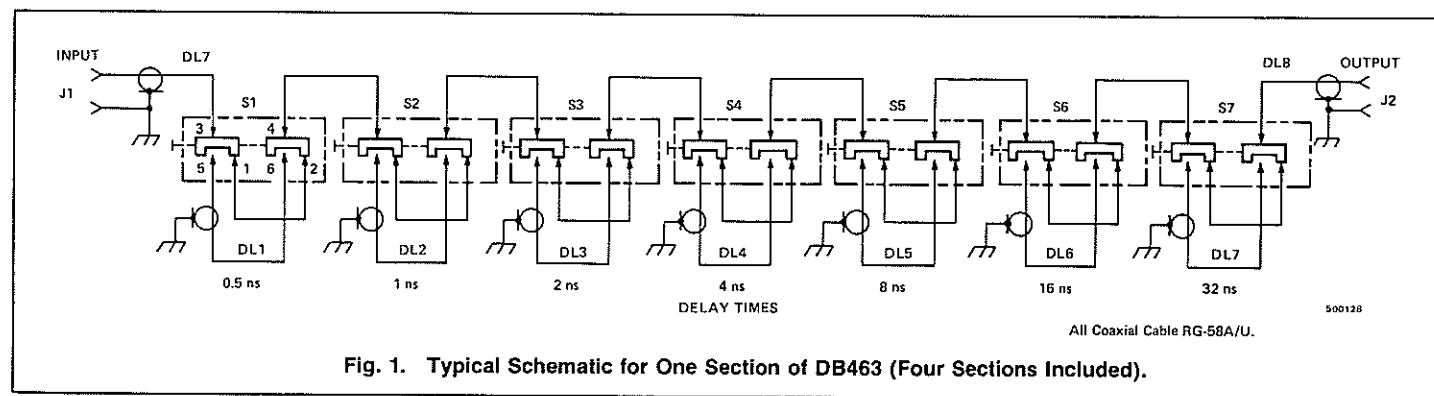

Printed in U.S.A.

1635 1086