

Ultra-Miniature DC to HV DC Converters

0 to + or -100 through 0 to + or - 10,000 VDC @ 0.5 Watts

Q Series



DESCRIPTION

The Q Series is a broad line of ultra-miniature, DC to HV DC converters supplying up to 5,000 volts in 0.125 cubic inches and up to 10,000 volts in 0.614 cubic inches. These component-sized converters are ideal for applications requiring minimal size and weight. The output is directly proportional to the input voltage and is linear from approximately 0.7V input to maximum input voltage, allowing for a controllable output voltage. Isolation is < +/- 500V bias on output RTN and output power is 0.5 watts. No external components or minimum load are required. The output ripple is extremely low for this package size, as low as 0.05% (typical) and can be further reduced with the addition of an external capacitor. Light weight, low power consumption and wide temperature range make these units ideal for portable, battery-powered equipment. Application notes are available on this series. Technical assistance is readily available.

Typical delivery: stock to one week.

FEATURES

- Ultra-Miniature Case Size
- No External Components Required
- Low Ripple and EMI/RFI
- Proportional Input/Output
- Input/Output Isolation
- Short Circuit Protection
- Proven Reliability
- MTBF: >3 million hrs per Bellcore TR-332

OPTION

External Copper Shield (Add "S" to model# ie: Q10-5-S)
Alternate Input/Output configurations:
available contact factory
Low Outgassing Epoxy

WINNER!

- 2001 UC Davis Connect
Most Innovative New Product Award
- 1999 Electronic Products
Product of the Year Award
- 1998 EE Product News
Runner up – Product of the Year Award

APPLICATIONS

- Avalanche Photodiodes
- Photomultiplier Tubes
- Light Sources
- Piezo Devices
- Sustaining Ion Pumps
- Electrophoresis
- Printers
- Igniters
- Capacitor Charging

MODEL	INPUT VOLT-AGE	OUTPUT VOLTAGE	OUTPUT*1 CURRENT	RIPPLE P-P	INPUT CURRENT		TYPICAL-FREQUENCY	CASE
					NO LOAD	FULL LOAD		
Q01-5	0 to 5V	0 to +/-100V	5 mA	<1.00%	<50mA	<175mA	100-200kHz	A
Q01-12	0 to 12V	0 to +/-100V	5 mA	<1.00%	<15mA	<100mA	100-200kHz	A
Q01-24	0 to 24V	0 to +/-100V	5 mA	<1.00%	<10mA	<50mA	100-200kHz	A
Q02-5	0 to 5V	0 to +/-200V	2.5 mA	<0.25%	<50mA	<175mA	200-350kHz	A
Q02-12	0 to 12V	0 to +/-200V	2.5 mA	<0.25%	<15mA	<75mA	200-350kHz	A
Q02-24	0 to 24V	0 to +/-200V	2.5 mA	<0.25%	<10mA	<50mA	200-350kHz	A
Q03-5	0 to 5V	0 to +/-300V	1.6 mA	<0.25%	<50mA	<175mA	125-300kHz	A
Q03-12	0 to 12V	0 to +/-300V	1.6 mA	<0.25%	<15mA	<100mA	125-300kHz	A
Q03-24	0 to 24V	0 to +/-300V	1.6 mA	<0.10%	<10mA	<50mA	125-300kHz	A
Q04-5	0 to 5V	0 to +/-400V	1.25 mA	<0.05%	<50mA	<175mA	200-350kHz	A
Q04-12	0 to 12V	0 to +/-400V	1.25 mA	<0.05%	<15mA	<100mA	200-350kHz	A
Q04-24	0 to 24V	0 to +/-400V	1.25 mA	<0.05%	<10mA	<50mA	200-350kHz	A
Q05-5	0 to 5V	0 to +/-500V	1 mA	<0.10%	<50mA	<200mA	175-350kHz	A
Q05-12	0 to 12V	0 to +/-500V	1 mA	<0.05%	<15mA	<100mA	175-350kHz	A
Q05-24	0 to 24V	0 to +/-500V	1 mA	<0.125%	<10mA	<50mA	200-350kHz	A
Q06-5	0 to 5V	0 to +/-600V	0.8 mA	<0.10%	<50mA	<200mA	150-275kHz	A
Q06-12	0 to 12V	0 to +/-600V	0.8 mA	<0.10%	<20mA	<100mA	175-350kHz	A
Q06-24	0 to 24V	0 to +/-600V	0.8 mA	<0.10%	<10mA	<50mA	150-275kHz	A
Q07-5	0 to 5V	0 to +/-700V	0.7 mA	<0.10%	<50mA	<175mA	150-275kHz	A
Q07-12	0 to 12V	0 to +/-700V	0.7 mA	<0.10%	<15mA	<100mA	150-275kHz	A
Q07-24	0 to 24V	0 to +/-700V	0.7 mA	<0.25%	<10mA	<50mA	75-175kHz	A
Q08-5	0 to 5V	0 to +/-800V	0.625 mA	<0.30%	<50mA	<175mA	200-350kHz	A
Q08-12	0 to 12V	0 to +/-800V	0.625 mA	<0.30%	<20mA	<100mA	100-200kHz	A
Q08-24	0 to 24V	0 to +/-800V	0.625 mA	<0.25%	<10mA	<50mA	100-200kHz	A
Q09-5	0 to 5V	0 to +/-900V	0.555 mA	<0.30%	<50mA	<175mA	125-300kHz	A
Q09-12	0 to 12V	0 to +/-900V	0.555 mA	<0.25%	<20mA	<100mA	125-300kHz	A
Q09-24	0 to 24V	0 to +/-900V	0.555 mA	<0.30%	<10mA	<50mA	125-300kHz	A
Q10-5	0 to 5V	0 to 1,000V	0.5 mA	<0.25%	<50mA	<175mA	400-500kHz	A
Q10-12	0 to 12V	0 to 1,000V	0.5 mA	<0.25%	<15mA	<100mA	125-300kHz	A
Q10-24	0 to 24V	0 to 1,000V	0.5 mA	<0.25%	<10mA	<50mA	125-300kHz	A
Q10N-5	0 to 5V	0 to -1,000V	0.5 mA	<0.25%	<50mA	<175mA	400-500kHz	A
Q10N-12	0 to 12V	0 to -1,000V	0.5 mA	<0.25%	<15mA	<100mA	125-300kHz	A
Q10N-24	0 to 24V	0 to -1,000V	0.5 mA	<0.25%	<10mA	<50mA	125-300kHz	A
Q12-5	0 to 5V	0 to 1,200V	0.4 mA	<0.25%	<50mA	<175mA	150-250kHz	A
Q12N-5	0 to 5V	0 to -1,200V	0.4 mA	<0.25%	<50mA	<175mA	150-250kHz	A
Q15-5	0 to 5V	0 to 1,500V	0.3 mA	<0.25%	<75mA	<175mA	125-350kHz	A
Q15N-5	0 to 5V	0 to -1,500V	0.3 mA	<0.25%	<75mA	<200mA	125-350kHz	A
Q20-5	0 to 5V	0 to 2,000V	0.25 mA	<0.25%	<100mA	<200mA	150-350kHz	A
Q20N-5	0 to 5V	0 to -2,000V	0.25 mA	<0.25%	<100mA	<200mA	150-350kHz	A
Q30-5	0 to 5V	0 to 3,000V	0.16mA	<0.50%	<100mA	<200mA	100-225kHz	B
Q30N-5	0 to 5V	0 to -3,000V	0.16mA	<0.50%	<100mA	<200mA	125-275kHz	B
Q40-5	0 to 5V	0 to 4000V	0.125mA	<0.50%	<175mA	<300mA	125-275kHz	B
Q40N-5	0 to 5V	0 to -4000V	0.125mA	<0.50%	<175mA	<300mA	125-275kHz	B
Q50-5	0 to 5V	0 to 5000V	0.100mA	<0.50%	<250mA	<400mA	200-350kHz	B
Q50N-5	0 to 5V	0 to -5000V	0.100mA	<0.50%	<250mA	<400mA	200-350kHz	B
Q60-5	0 to 5V	0 to 6000V	83µA	<1.00%	<175mA	<250mA	50-100kHz	C
Q60N-5	0 to 5V	0 to -6000V	83µA	<1.00%	<175mA	<250mA	50-100kHz	C
Q80-5	0 to 5V	0 to 8000V	62.5µA	<1.00%	<175mA	<250mA	50-100kHz	C
Q80N-5	0 to 5V	0 to -8000V	62.5µA	<1.00%	<175mA	<250mA	50-100kHz	C
Q101-5	0 to 5V	0 to 10,000V	50µA	<1.00%	<175mA	<250mA	50-75kHz	C
Q101N-5	0 to 5V	0 to -10,000V	50µA	<1.00%	<175mA	<250mA	50-75kHz	C

*Note: 1. At Maximum Rated Output Voltage.

e-mail sales@emcohighvoltage.com
Web site www.emcohighvoltage.com

Phone (209) 267-1630 Fax (209) 267-0282
70 Forest Products Road, Sutter Creek CA 95685


Ultra-Miniature DC to HV DC Converters

0 to + or -100 through 0 to + or - 10,000 VDC @ 0.5 Watts
Q Series

www.emcohighvoltage.com

EMCO
High Voltage Corporation

CASE A&B Q01 to Q20

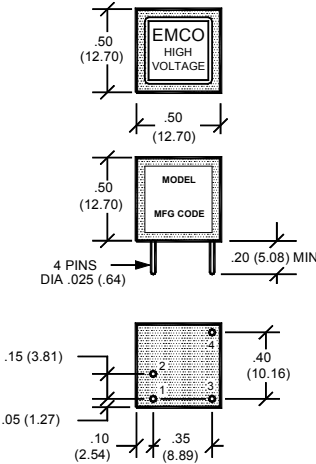

BOTTOM VIEW

Pin Diameter .025

PHYSICAL CHARACTERISTICS

SIZE: 0.5 x 0.5 x 0.5 (12.7 x 12.7 x 12.7)
WEIGHT: 0.15 Ounces Approx. (4.25 Grams)
PACKAGING: Fully Encapsulated
CASE MATERIAL: Glass-filled Epoxy
PINS: See Table

ELECTRICAL SPECIFICATIONS


INPUT VOLTAGE: Models Q01-Q10: 0 to 5, 12 or 24 VDC
Models Q12-Q50: 0 to 5 VDC
TYPICAL TURN-ON VOLTAGE: 0.7 Volts
OUTPUT VOLTAGE TOLERANCE: +5%, -10%
At full rated output voltage, full load, 25°C.
ISOLATION: < +/- 500V BIAS ON OUTPUT RTN (PIN 4)
OPERATING TEMP: -25° to +70° C (Q30 - Q50: -10° to +60° C)
STORAGE TEMP: -55° to +105° C

Pin #	Function	Qxx	QxxN
1	Input	(-)	(-)
2	Input	(+)	(+)
3	Output	(+)	(-)
4	Output	(RTN)	(RTN)

Dimensions are in inches
Dimensional Tolerances: ± .03 (.76mm)
(Metric Equivalents in Parenthesis)

Post-wave solder installation recommended.


CASE B Q30 to Q50

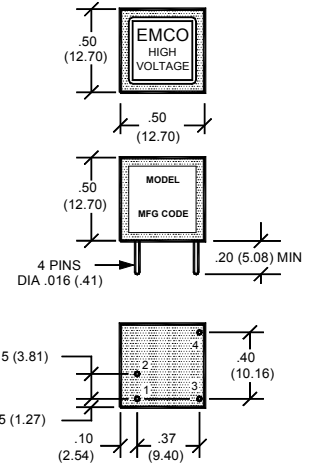

BOTTOM VIEW

Pin Diameter .016

CASE C Q60, Q80 & Q101

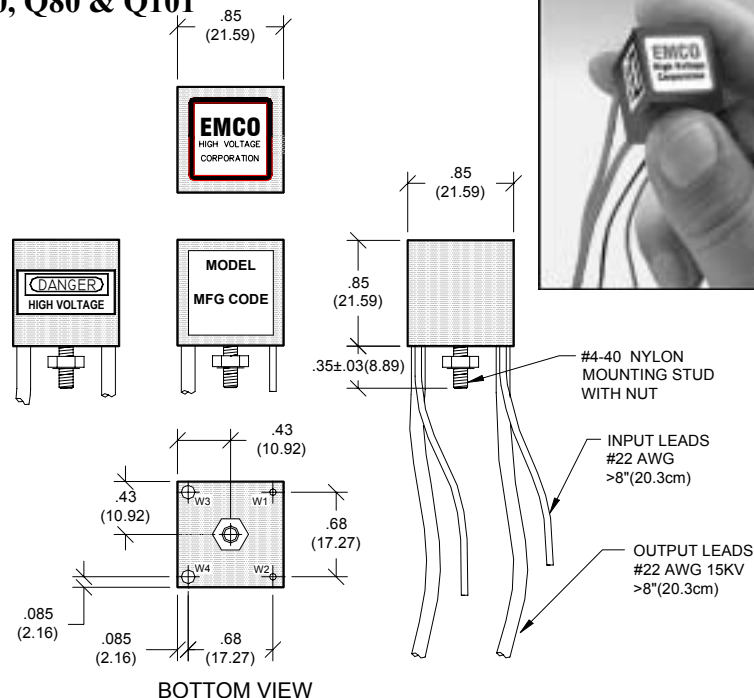

BOTTOM VIEW

PHYSICAL CHARACTERISTICS

SIZE: 0.85 x 0.85 x 0.85 (21.59 x 21.59 x 21.59)
WEIGHT: 1 Ounce (28.3 Grams)
PACKAGING: Fully Encapsulated
CASE MATERIAL: Glass-filled Epoxy

ELECTRICAL SPECIFICATIONS

INPUT VOLTAGE: 0 to 5 VDC
TYPICAL TURN-ON VOLTAGE: 0.7 Volts
OUTPUT VOLTAGE TOLERANCE: +5%, -10%
At full rated output voltage, full load, 25°C.
ISOLATION: < +/- 500V BIAS ON OUTPUT RTN (W4)
OPERATING TEMP: -10° to +60° C
STORAGE TEMP: -20° to +105° C
NOTE: Do not allow output voltage to exceed maximum rating.

Wire #	Color	Function	Qxx	QxxN
W1	Red	Input	(+)	(+)
W2	Black	Input	(-)	(-)
W3	Brn	Output	(+)	(-)
W4	Vio	Output	(RTN)	(RTN)

Dimensions are in inches
Dimensional Tolerances: ± .03 (.76mm)
(Metric Equivalents in Parenthesis)

Post-wave solder installation recommended.

e-mail sales@emcohighvoltage.com
Web site www.emcohighvoltage.com

Phone (209) 267-1630 Fax (209) 267-0282
70 Forest Products Road, Sutter Creek CA 95685

We reserve the right to make changes without notification