


ENERGIZER X91

AA



Industry Standard Dimensions

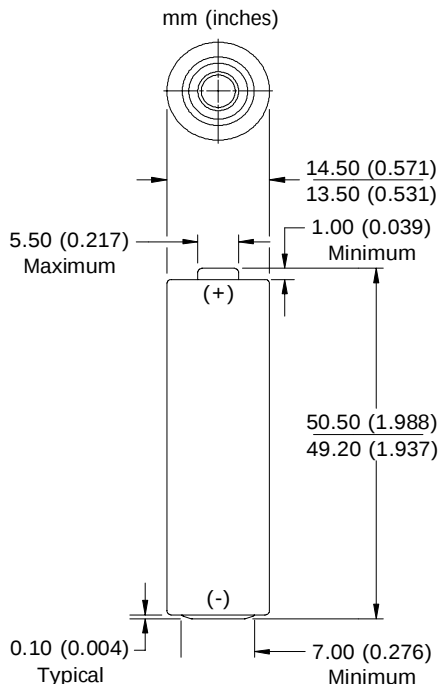


Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium
Designation:	ANSI-15A, IEC-LR6
Nominal Voltage:	1.5 volts
Nominal IR:	150 to 300 milliohms (fresh)*
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Typical Weight:	23.0 grams (0.8 oz.)
Typical Volume:	8.1 cubic centimeters (0.5 cubic inch)
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Performance


Continuous discharge to 0.8 volts at 21°C

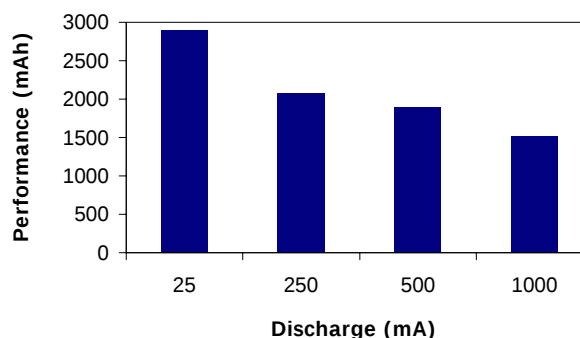

Device Selection Guide:

Digital Camera	
Photoflash	
Games, CD's, MD's	
Tape Player	
Lighting	
Toy	
Remote Control	
Radio	
Clock	

Battery Selection Indicator

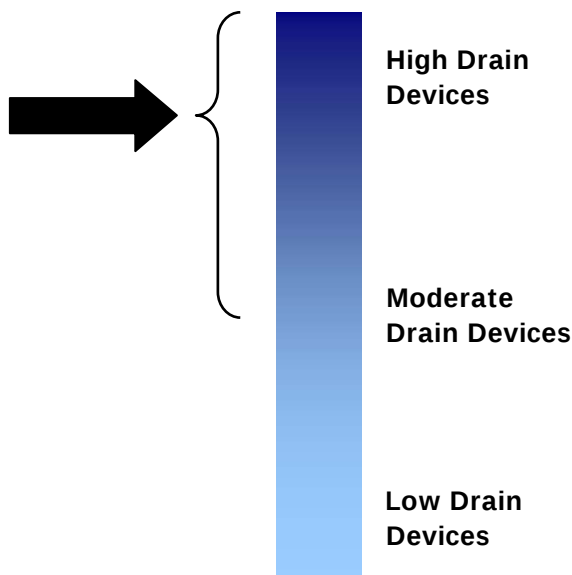

Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER X91

AA


Constant Power Performance

Typical Characteristics (21°C)

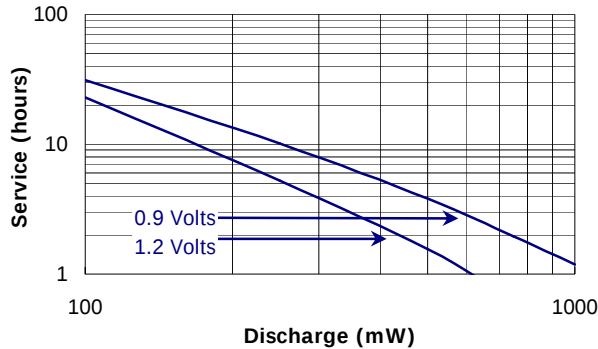


Constant Current Performance

Typical Characteristics (21°C)

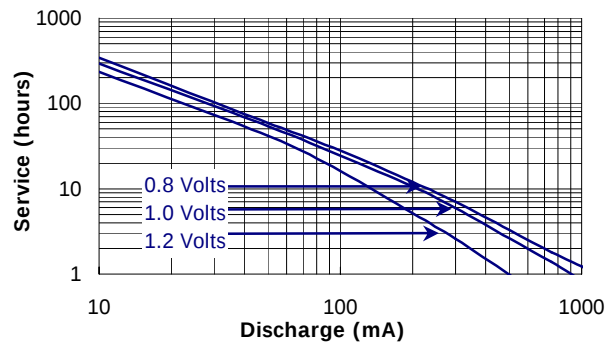


Constant Power Performance

Discharge Characteristics (21°C)


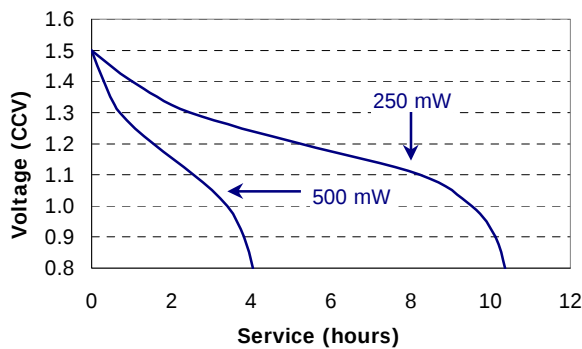


Constant Current Performance

250 mA Discharge (-20°C / 0°C / 21°C)

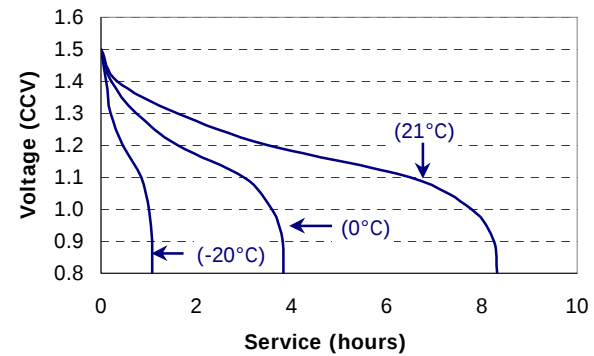

Industry Standard Tests (21°C)

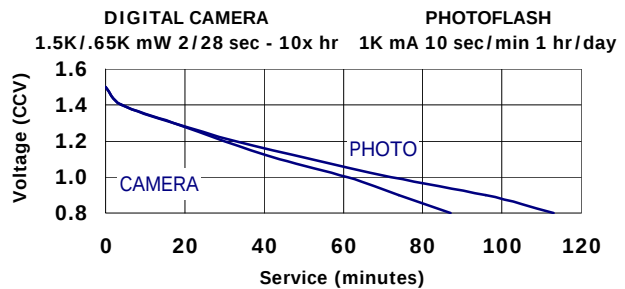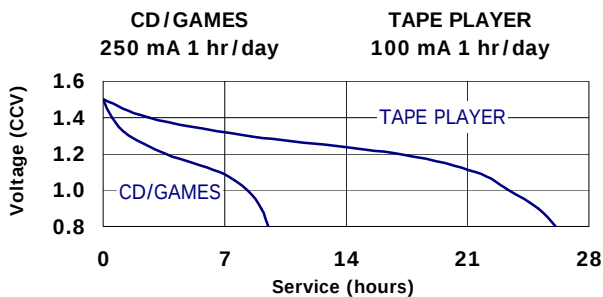

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.