


ENERGIZER NO. CR2032



Industry Standard Dimensions

mm (inches)

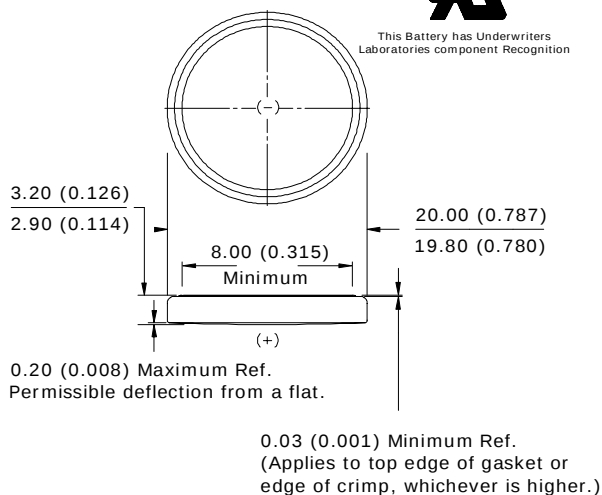

Simulated Application test

Typical Performance at 21°C (70°F)

Schedule:	Typical Drains: at 2.9V (mA)	Load (ohms)	Cutoff 2.0V (hours)
Continuous	0.29	10,000	776

Typical Discharge Characteristics


Load: 10K ohms - Continuous
Typical Drain @ 2.9V: 0.29 mA



Specifications

Classification:	"Lithium Coin"
Chemical System:	Lithium / Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI / NEDA-5003LC, IEC-CR2025
Nominal Voltage:	3.0 Volts
Typical Capacity:	225 mAh (to 2.0 volts) (Rated at 10K ohms at 21°C)
Typical Weight:	3.3 grams (0.12 oz.)
Typical Volume:	1.0 cubic centimeters (0.06 cubic inch)
Max Rev Charge:	1 microampere
Energy Density:	198 milliwatt hr/g, 653 milliwatt hr/cc
Typical Li Content:	0.109 grams (0.0038 oz.)
UL Listed:	MH12454
Shipping:	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185

Cross Section

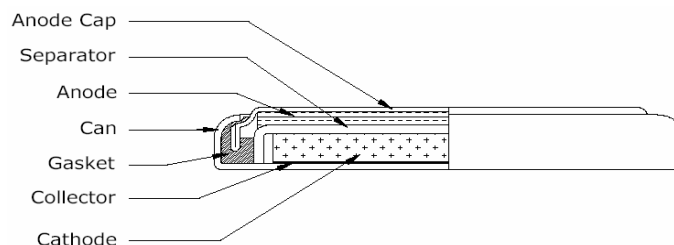


Internal resistance Characteristics

Pulse Test at 21°C (70°F)

Bkgnd Drain: Continuous
10K ohms
0.29 mA @ 2.9V

Pulse Drain: 2 seconds X 12 times/day
400 ohms
6.8 mA @ 2.7V

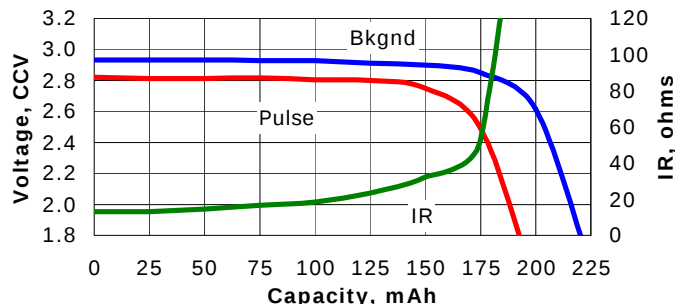

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©Eveready Battery Company, Inc. - All Rights Reserved