


ENERGIZER L522MJ

9V



Industry Standard Dimensions

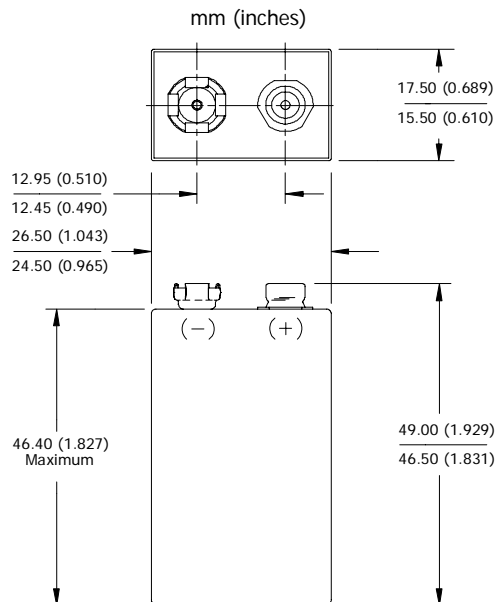

This Battery has Underwriters Laboratories component Recognition


Specifications

Classification:	Lithium 9V
Chemical System:	Lithium-Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI-1604LC
Nominal Voltage:	9.0 volts
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Max Discharge :	120 mA continuous *
Typical Weight:	36.4 grams (1.3 oz.)
Typical Volume:	21.4 cubic centimeters (1.3 cubic inch)
Jacket:	Metal
Terminal:	Miniature Snap
Typical Li Content:	1.35 grams (0.048 oz.)
UL Listed:	MH12454
Applications:	This battery best suited for long and short term applications. For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185


* **Discharging above 120 milliamps (mA) may activate the built-in safety mechanism. This can permanently affect battery performance.**

Typical Discharge Performance (21°C)

60Ω (120 mA) Continuous Discharge

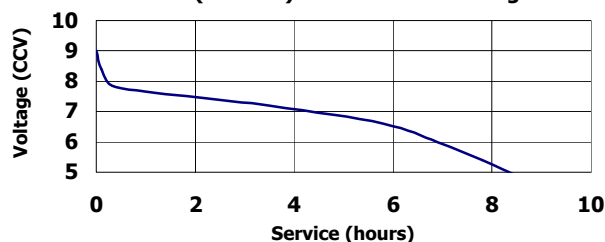


300Ω (27 mA) Continuous Discharge

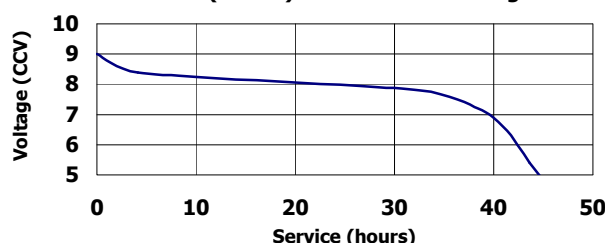


Milliamp-Hours Performance (21°C)

Continuous Discharge to 5.4 volts

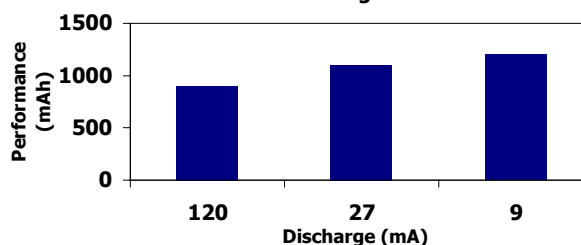

900Ω (9 mA) Continuous Discharge

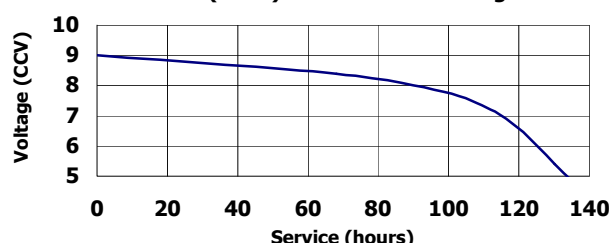

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.