

28 mm (1-1/8 Inch) Diameter, 9-stage, Bialkali Photocathode, Side-on Type
High Gain and Low Dark Current
300 nm to 650 nm Spectral Response


SPECIFICATIONS

GENERAL

Parameter	Description/Value	Unit
Spectral Response	300 to 650	nm
Wavelength of Maximum Response	400	nm
Photocathode	Material	Bialkali
	Minimum Effective Area	8 × 24
Window Material	Borosilicate glass	—
Dynode	Structure	Circular-cage
	Number of Stages	9
Direct Interelectrode Capacitances	Anode to Last Dynode	4
	Anode to All Other Electrodes	6
Base	11-pin base JEDEC No. B11-88	—
Weight	Approx. 45	g
Operating Ambient Temperature	-30 to +50	°C
Storage Temperature	-30 to +50	°C
Suitable Socket	E678-11A (Sold Separately)	—
Suitable Socket Assembly	E717-63 (Sold Separately)	—



Figure 1: Typical Spectral Response

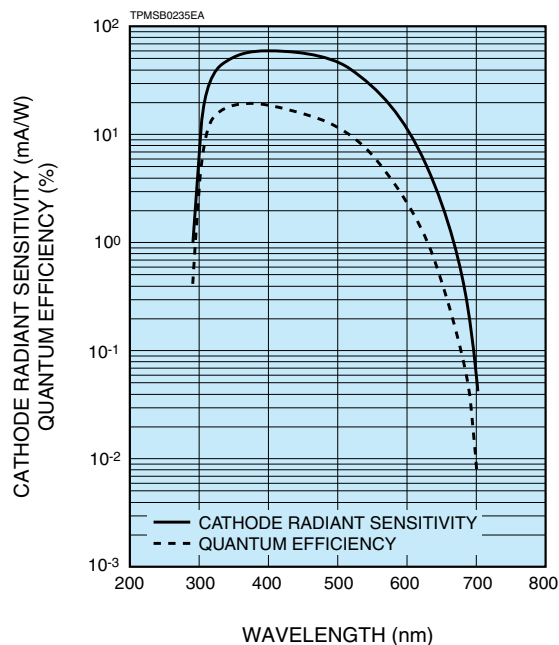

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter	Value	Unit
Supply Voltage Between Anode and Cathode	1250	V
Voltage Between Anode and Last Dynode	250	V
Average Anode Current	0.1	mA

CHARACTERISTICS (at 25 °C)

Parameter	Min.	Typ.	Max.	Unit
Cathode Sensitivity	Luminous (2856 K)	40	60	—
	Radiant at 400 nm	—	60	—
	Quantum Efficiency at 400 nm	—	18.6	—
	Blue Sensitivity Index (CS 5-58)	—	7.1	—
Anode Sensitivity	Luminous (2856 K)	200	600	2000
	Radiant at 400 nm	—	6 × 10 ⁵	—
Gain	—	1.0 × 10 ⁷	—	—
Anode Dark Current (After 30 min Storage in Darkness)	—	1	10	nA
Time Response	Anode Pulse Rise Time	—	2.2	—
	Electron Transit Time	—	22	—

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	P
Ratio	1	1	1	1	1	1	1	1	1	1	1

Supply Voltage: 1000 V, K: Cathode, Dy: Dynode, P: Anode

PHOTOMULTIPLIER TUBE R11558

Figure 2: Typical Gain Characteristics

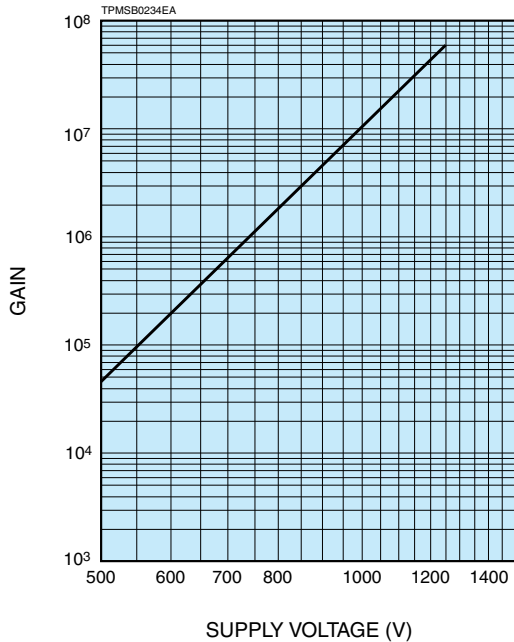


Figure 3: Dimensional Outline and Basing Diagram (Unit: mm)


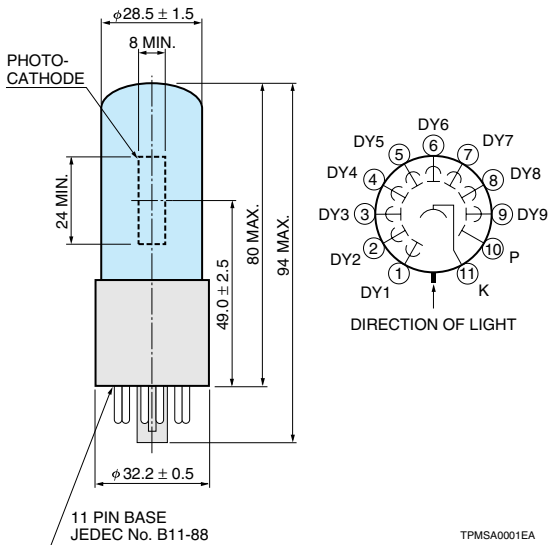


Figure 4: Accessories (Unit: mm) Sold Separately

D Type Socket Assembly E717-63

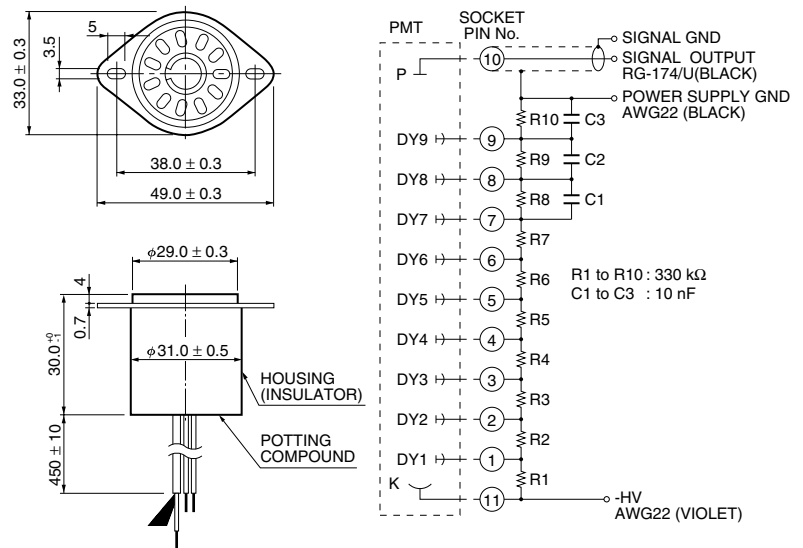

* Hamamatsu also provides C4900 series compact high voltage power supplies and C6270, C8991 DP type socket assemblies which incorporate a DC to DC converter type high voltage power supply.

Warning–Personal Safety Hazards
Electrical Shock–Operating voltages applied to this device present a shock hazard.

HAMAMATSU

WEB SITE www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: info@hamamatsu.it

TPMS1078E01
JUN. 2010. IP