


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

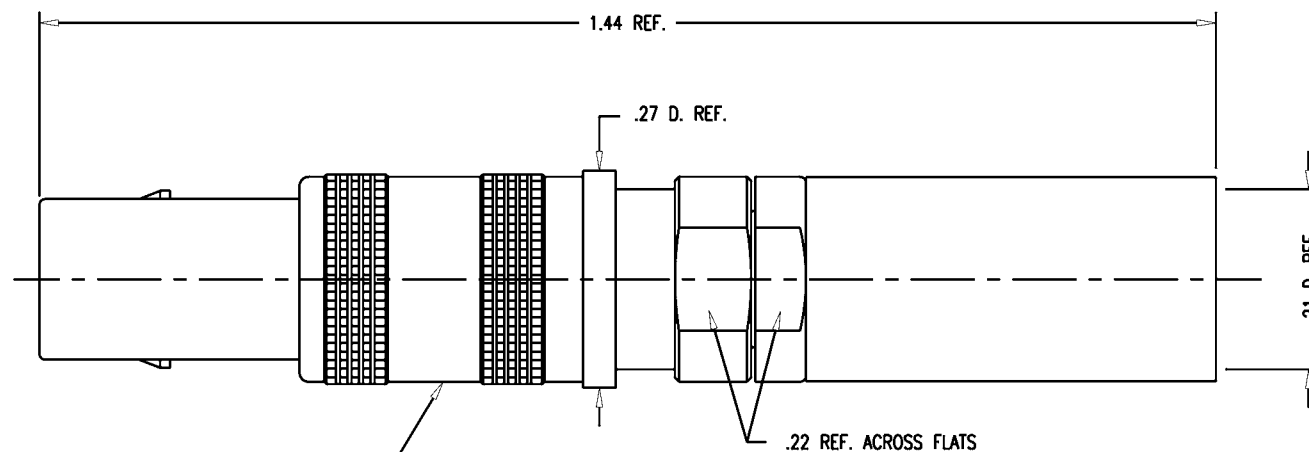

STAMP: KINGS 1075-2

NOTES:

1. FOR USE WITH RG-58, 58A & 58C/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-458.
4. FOR CRIMPING USE DIE KTH-2027.
5. MATERIALS:
INSULATORS: TEFLON, ASTM-D-4894
K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135
K-LOC BODY: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS

1075-2

REVISIONS

ISSUE	CHANGES
6	CN 36644 C REDRAWN KH 11/21/95

KAM6228

SCALE 6:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, K-LOC

DRAWN	KH	DATE	11/21/95
DESIGN	LI	DATE	11/22/95
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1075-2

GSD