


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

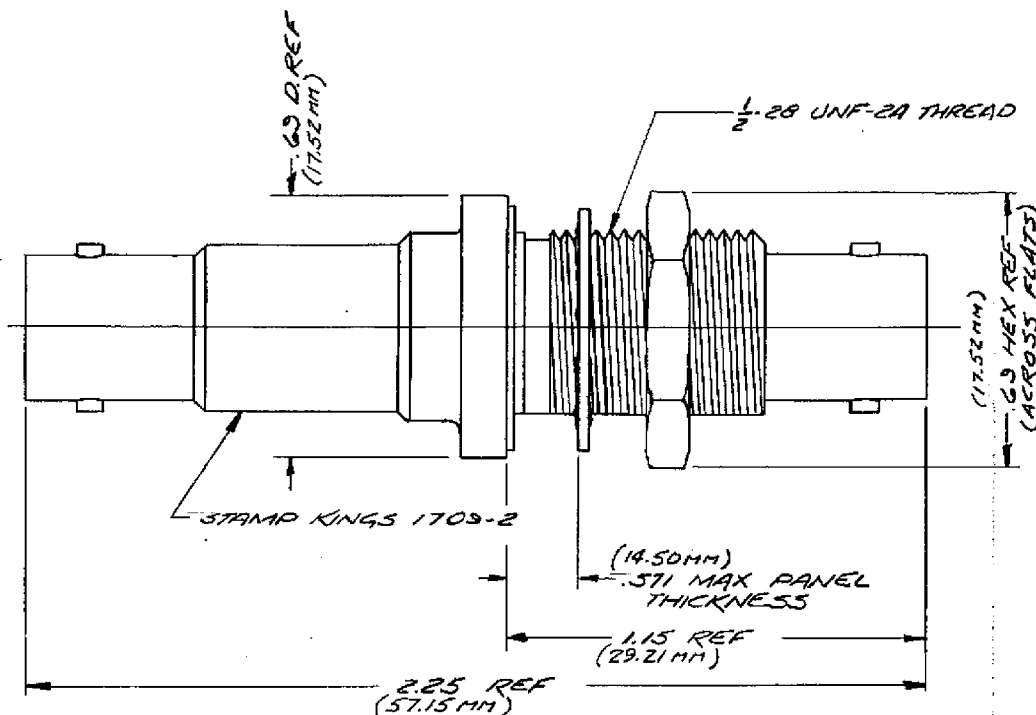

NOTES:

1. MATERIALS:

BRASS, QQ-B-626
 BERYLLIUM COPPER, QQ-C-530
 PHOSPHOR BRONZE, QQ-B-750
 CORNING GLASS
 KOVAR
 SILICONE RUBBER, EE-R-765

2. FINISHES

CONTACT TO BE HARD GOLD PLATE,
 ALL OTHER METAL PARTS
 TO BE TR-5.


3. ELECTRICAL CHARACTERISTICS:

VOLTAGE RATING: 5000 VOLTS DC
 3500 VOLTS RMS

LEAKAGE RATING:

10⁻⁷ CC/SEC OF TRAKER GAS
 AT ATMOSPHERIC PRESSURE
 TEST VOLTAGE:

10000 VOLTS DC
 5000 VOLTS RMS



MOUNTING HOLE

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
 3 PLACE DECIMALS $\pm .004$ ANGLES $\pm 0^\circ 30'$
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT
 EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

ITEM	REQ'D	DESCRIPTION	PART NO.
------	-------	-------------	----------

REVISIONS

ISSUE	CHANGES
3	CN 25258 C GL 8 NOV 83

USED ON:

REF:

FINISH

SPEC. KER 10004

MATL.

SPEC.

SHV BULKHEAD
 ADAPTER (HERM. SEAL)

DRAWN JHP DATE 10 MAR 77

APPR. A.T. DATE 10 MAR 77

KINGS ELECTRONICS
 40 MARBLEDALE ROAD
 TUCKAHOE, N. Y. 10707

1709-2

GSDSD