
Model Nomenclature

AKM Brushless Servomotor

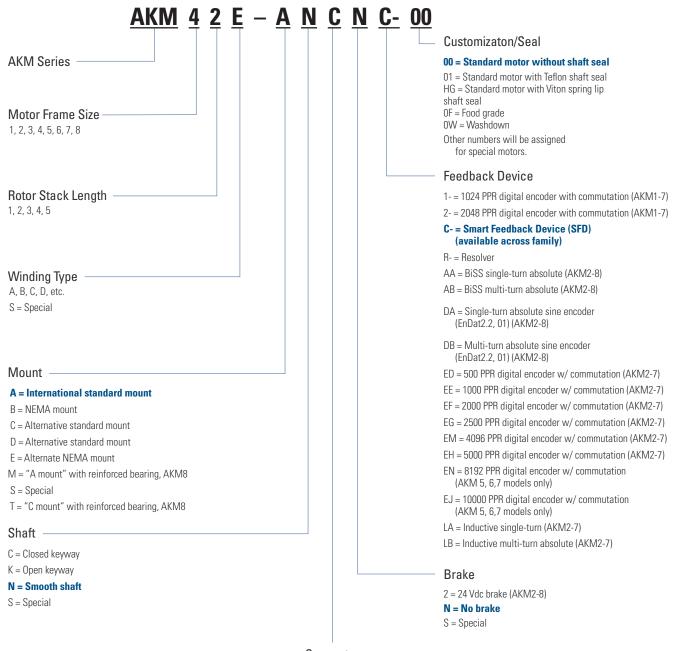

Connectors

- B = Dual motor-mounted rotatable IP65 connectors (AKM2 only)
- C = 0.5 m shielded cables with IP65 connectors (AKM1, 2), motor-mounted rotatable IP65 connectors (AKM3-7)
- D = Single angular connector (AKM2, 3, 4)
- G = Straight motor-mounted IP65 connectors (AKM2-7)
- H = Motor-mounted IP65 power connector size 1.5 (AKM74Q & AKM82 only)
- M = 0.5 m shielded cable w/ IP20 connector (AKM1, 2, 3, 4 models, less than 6 amps)
- P = 0.5 m shielded cable w/single IP20 connector (AKM1, 2, 3, 4 models with SFD and no brake, less than 6 amps)
- S = Special
- T = Terminal box for power and feedback connector size 1.0 (AKM8 only)

www.kollmorgen.com