

# Miller 8815-12 and 8815-24 Shadow Beam Anchor

## Materials

**Foot Ends** .....Aluminum  
**Support Shaft**.....Stainless Steel  
**Retractable Plunger**.... Stainless Steel  
**D- Ring Attachment**.....Plated, Drop forged steel and stainless steel  
**Hardware**.....Steel Minimum Tensile strength

\* All hardware meets ASTM (50) fifty-hour salt spray test requirements.

## Technical


**Max Working Load**.....400 lbs (181.4 kg)  
**Minimum Tensile Strength**.....5000 lbs. (22kN)  
**Fits Flange Sizes**.....See Chart Below  
**Weight**.....See Chart Below



## Identification

**Label Materials**.....Lexan and Valeron  
**Label Contents**..... Inspection, Type, Model, Date  
Size, Material Specs,  
Capacity, Certifications.

Miller Shadow Beam Anchors connect horizontally to a wide range of I and H beam flanges from 4 inches (100mm) to 24 inches (610mm) wide and up to 2-1/2 inches thick. The fixed unit (Model 8815) is designed to be tightened horizontally or vertically, firmly gripping the beam or column to provide a temporary or permanent anchorage attachment.

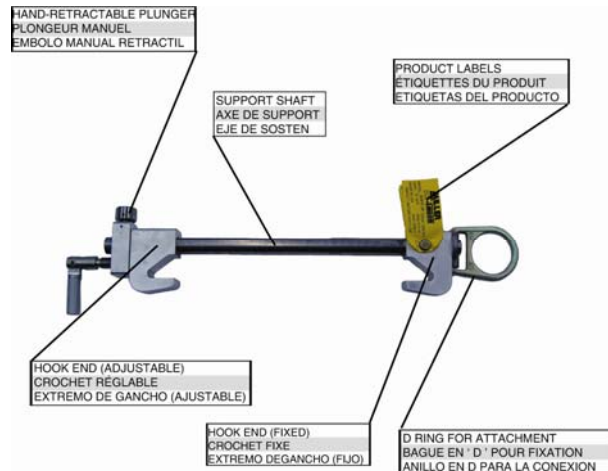

Model No.	Fits Flange Sizes	Weight		
<b>8815-12</b>	4" to 12" (100mm to 305mm)	7.75lbs (3.1kg)		
<b>8815-24</b>	12" to 24" (305mm to 610mm)	13.65lbs (6.19kg)		