
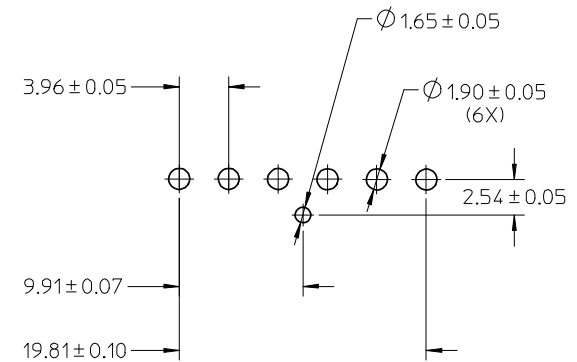


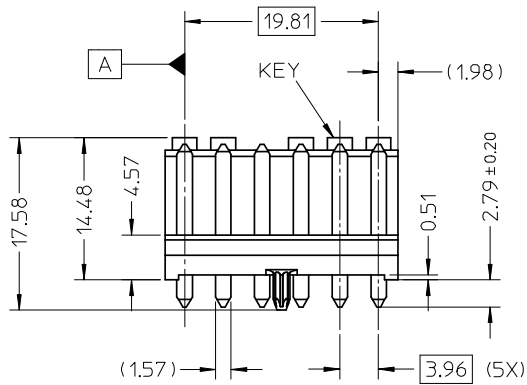


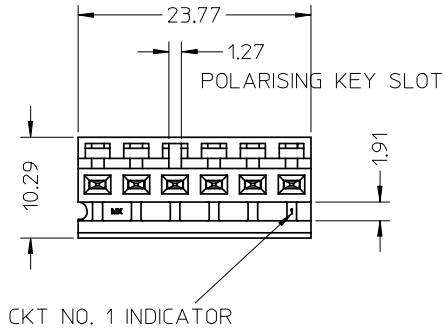

RECOMENDED PCB LAYOUT

NOTES:

- AXIAL PIN PUSHOUT FORCE: 2LBS (0.91 KG) MIN.
- MATERIALS:
PIN - BRASS, ALLOY 260
PLATING - POST ELECTRO-PLATE 5.08μM MIN TIN OVER 1.27μM MIN TIN OVERALL, MATTE FINISH (AS PER ES-88-224 CODE)
WAFER - CODE "P": POLYESTER, 15% GF, 94V-0,COLOR:BK
- PS-8619 APPLIES
- NO POLARIZING KEY AT CIRCUIT #4

ENTER DESCRIPTION EC NO: 12008-0572 DRWN:RRANGAPPA01 2008/04/10 CHKD:KPRASAD 2008/04/10 APPR:KPRASAD 2008/04/10			DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION ⊙ □		
A			REV		mm INCH		DRAWN BY RAGHU		DATE 2008/04/04		HEADER SINGLE ROW 3.96MM PITCH		
					4 PLACES ± --- ± ---		CHECKED BY		DATE				
					3 PLACES ± --- ± ---		KPRASAD		2008/04/04				
					2 PLACES ± 0.25 ± ---		APPROVED BY		DATE		MOLEX MOLEX INCORPORATED		
					1 PLACE ± 0.35 ± ---		KPRASAD		2008/04/04				
					ANGULAR ± 1 °		MATERIAL NO. 366420001		DOCUMENT NO. SDA-8619-0609		SHEET NO. 1 OF 1		
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				