



P2

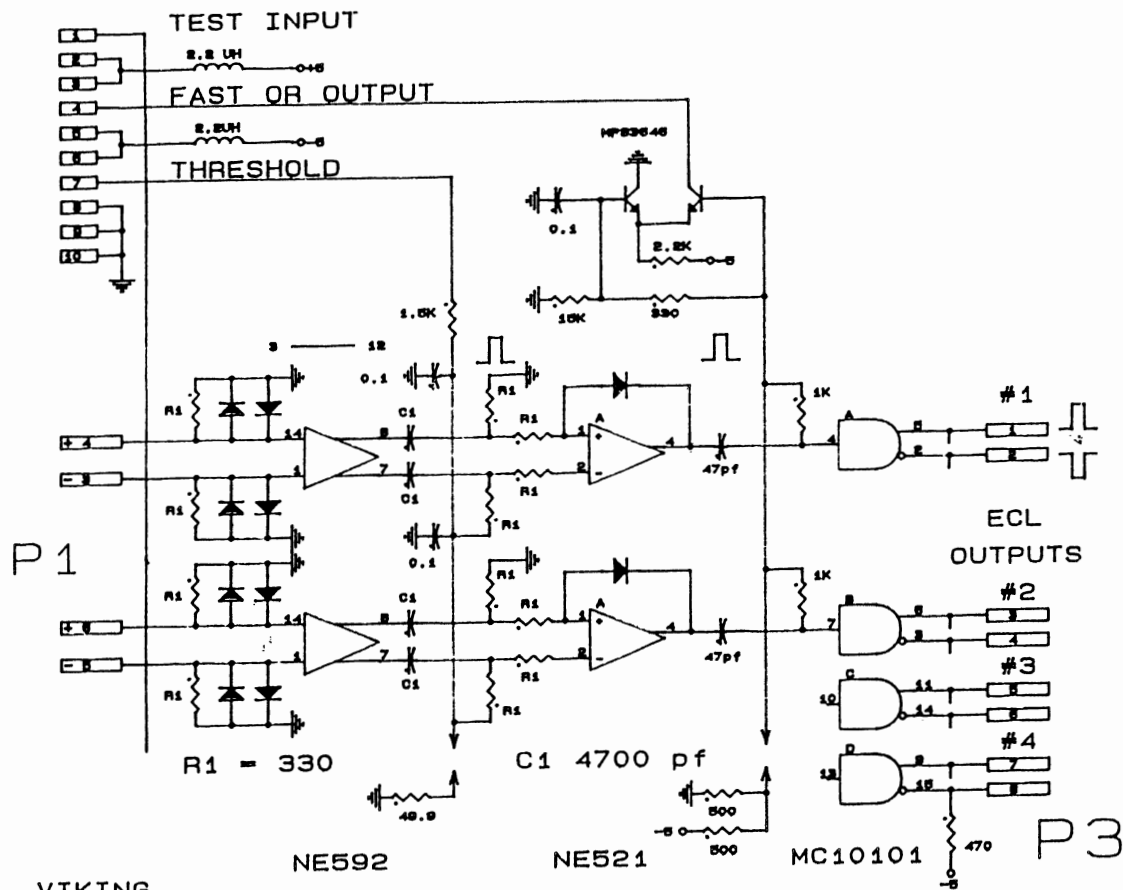

VIKING
3VN18/1JND5

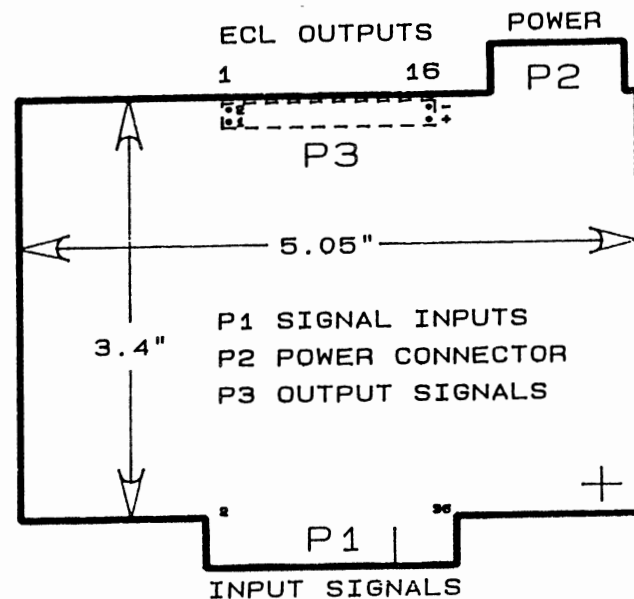

NOTES:

1. THRESHOLD 1 V = 1 MICRO AMP.
2. FAST OR output
-30 MV INTO 50 OHMS.
3. POWER CONSUMPTION
+5 V at 0.4 AMP. 2 WATTS
-5 V at 0.68 AMP. 3.5 WATTS
335 mw PER CHANNEL
5.5 WATTS PER CARD
4. GROUND UNUSED INPUTS!
THIS REDUCES THE INPUT NOISE.

RESISTANCE IN OHMS
CAPACITANCE IN MICRO FARADS
INDUCTANCE IN HENRYS

NANOMETRIC SYSTEMS, INC. 451 S. ELVD. OAK PARK, IL 60302 USA PHONE (708) 524 1348 FAX (708) 524 0774		
Title	16 CHANNEL AMPLIFIER CARD	
Size	Document Number	REV
8	N-277	1.0
Printed	APR 14 1990	1 of 1