

HEAVY DUTY INDUSTRIAL PRESSURE TRANSMITTERS GAGE AND DIFFERENTIAL PRESSURE MODELS

PX750 Series

5 Models:

Gage Pressure

Differential Pressure

High Differential Pressure

Draft-Range Differential

Square-Root Output

**Smart Retrofit
Kit Now Available!**
See Page B-234

Shown smaller
than actual size.

Starts at
\$1565



SPECIFICATIONS

(For All Models)

Service: Liquid, Gas, Vapor

Output: 4-20 mA_{dc} 2-wire

Excitation: 12 to 45 V_{dc} with no load.
See chart for loop resistance (Figure 1).

Indication: Optional meter with 1½",
0-100% scale; accuracy is 2% of span

Hazardous Locations: Factory Mutual
(FM) approvals: Class 1 Division 1 and
2, Groups B, C, and D. Dust-ignition
proof: Class 2, Divisions 1 and 2,
Groups E, F, & G. Suitable for use in:
Class 3, Divisions 1 and 2. Indoor and
outdoor use. NEMA 4X.

Zero and Span: Continuously
adjustable externally Zero Elevation and
Suppression: Regardless of output
specified, zero elevation and
suppression must be such that neither
the span nor the upper or lower range
value, exceed 100% of the upper range
limit. Maximum zero elevation: 600% of
calibrated span. Maximum zero
suppression: 500% of calibrated span

Temperature Limits: Amplifier: -20 to
+200°F (-29 to -93°C)
Square Root Amplifier: -20 to 150°F (-29
to 66°C)

Element: -40 to 220°F (-40 to 104°C)

Humidity Limits: 0 to 100% RH

Volumetric Displacement: Less than
0.01 cubic inches (16cm³)

Turn On Time: 2 seconds — no warm
up required

Field-selectable ¼"
or ½" FNPT Ports.
Adaptor included.

PHYSICAL SPECIFICATIONS

Isolating Diaphragm: 316 Stainless
Steel

Drain/Vent Valves: 316 Stainless Steel
Process Flange and Adapter:
Cadmium plated carbon steel standard
(316 Stainless Steel Optional)

Wetted O-Rings: Viton® A
(Flouro-Polymer)

Fill Fluid: Silicon Oil

Bolts: Cadmium Plated Carbon Steel

Electronic Housing:
Low Copper Aluminum


Paint: Epoxy-Polyester

Electrical Connections: ½" conduit with
screw terminals and integral test jacks
compatible with miniature banana plugs

Weight: 12 pounds (5.44 kg)
excluding options

Vibration Effect: 0.05% of upper range
limit per G to 200 Hz in any axis

Power Supply Effect: < 0.005% of shift
up to 1 inH₂O which can be calibrated out

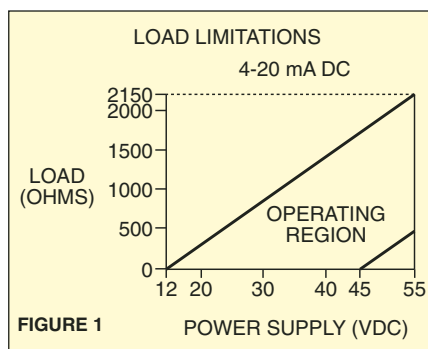

ACCESSORIES

PX750-M1, linear meter kit,
0 to 100% scale, **\$250**

PX750-B3, mounting bracket kit for
flush panel mounting or 2" pipe, **\$60**

HEAVY DUTY GAGE PRESSURE TRANSMITTER RUGGED NEMA 4X ENCLOSURE

PX750-GI Series
0-5 inH₂O to 6000 psig

Starts at
\$1565

- ✓ Stainless Steel Diaphragm
- ✓ High Accuracy: 0.25% of Span
- ✓ FM Explosion-Proof Rating; NEMA 4X Enclosure
- ✓ 4 to 20 mA Current Output
- ✓ External Zero and Span Adjustments
- ✓ Compatible with Any 2-Wire System

The OMEGA PX750 Gage Pressure Transmitter brings true precision and reliability to industrial pressure monitoring applications. Process pressure is transmitted through an isolating diaphragm and an oil fill fluid to a central sensing diaphragm. The atmospheric reference pressure is transmitted similarly to the other side of the sensing diaphragm. The displacement of the sensing diaphragm is proportional to the pressure differential across it. In addition to gage pressure, the PX750 can measure vacuums by simply reversing the process connection to the sensing element.

SPECIFICATIONS

Accuracy: $\pm 0.25\%$ of calibrated span (includes linearity, hysteresis and repeatability)

Stability: $\pm 0.25\%$ URL for 6-months

Temperature Effect at Maximum Span (e.g. 0 to 100 psig for 0 to 17/100 psig Range): Zero error = $\pm 0.5\%$ of span per 55°C (100°F); total effect including span and zero errors = $\pm 1.0\%$ of span per 55°C (100°F)

PX750-30Gi, \$1695, shown smaller than actual size..



Temperature Effect at Minimum Span (e.g. 0 to 17 psig for 0 to 17/100 psig Range): Zero error = $\pm 3.0\%$ of span per 55°C (100°F); total effect including span and zero errors = $\pm 3.5\%$ of span per 55°C (100°F) (double the specified effects for 30 inH₂O range)

Mounting: 1/2 NPT on adaptor, 1/4 NPT with adaptor removed

Damping: Time constant continuously adjustable between 0.2 (0.4 for 30 inH₂O range) to 1.67 seconds for silicone fill

MOST POPULAR MODELS HIGHLIGHTED

To Order (Specify Model Number)

Model No.	Price	Lower Range Gage Pres.	Upper Range Gage Pres.	Compatible Meters
PX750-30GI	\$1695	0 to 5 inH ₂ O	0 to 30 inH ₂ O	DP41-E, DP25B-E, DP3002-E
PX750-150GI	1565	0 to 25 inH ₂ O	0 to 150 inH ₂ O	DP41-E, DP25B-E, DP3002-E
PX750-750GI	1565	0 to 125 inH ₂ O	0 to 750 inH ₂ O	DP41-E, DP25B-E, DP3002-E
PX750-100GI	1565	0 to 17 psi	0 to 100 psi	DP41-E, DP25B-E, DP3002-E
PX750-300GI	1565	0 to 50 psi	0 to 300 psi	DP41-E, DP25B-E, DP3002-E
PX750-1KGI	1565	0 to 170 psi	0 to 1000 psi	DP41-E, DP25B-E, DP3002-E
PX750-3KGI	1699	0 to 500 psi	0 to 3000 psi	DP41-E, DP25B-E, DP3002-E
PX750-6KGI	1699	0 to 1000 psi	0 to 6000 psi	DP41-E, DP25B-E, DP3002-E

HEAVY DUTY DIFFERENTIAL PRESSURE TRANSMITTER

PX750-DI/HDI Series 0-5 inH₂O to 0-170 psid

Starts at
\$1545

- ✓ **High Accuracy:**
0.2% of Span
- ✓ **"Smart" Option**
- ✓ **External Zero and Span Adjustments Up to 600% Elevation or 500% Suppression**
- ✓ **Stainless Steel Diaphragm**
- ✓ **NEMA 4X Enclosure**
- ✓ **FM Explosion-Proof Rating**

The PX750 Industrial Transmitter is designed for accurate measurement of differential pressure in higher dp applications such as level measurements on towers and pressure drop across compressors or filters. Full overpressure protection to 2000 psi permits confident application in high pressure systems. Installation is simplified by a compact flexible design, 2-wire compatibility, external span and zero adjustments all packaged in an FM approved, weather-tight NEMA 4 enclosure.

A new "Smart" option now makes the PX750 compatible with new installations and makes it possible to upgrade existing installations.

SPECIFICATIONS

Accuracy: ±0.2% of calibrated span,. Includes combined effects of hysteresis, linearity and repeatability

Linearity: ±0.1% of calibrated span

Hysteresis: ±0.05% of calibrated span

Dead Band: None

Stability: ±0.2% of upper range limit for 6 months

PX750-30DI, \$1805,
shows smaller than
actual size.

Temperature Effect at Maximum Span
0 to 150 inH₂O: Zero error ±3% of span per 55°C (100°F); total error ± 3.5% of span per 55°C (100°F) (includes zero and span errors)


Note: Double the specified effects for the 0 to 30 inH₂O range.

Static Pressure and Overpressure Limits: 0 psia to 2000 psig on either or both sides without damage to the transmitter. Operates within specifications for static pressure from 0.5 psi absolute to 2000 psig; 10,000 psi proof pressure on flanges

High Differential Ranges:
Zero effect: ±0.5% of upper range limit for 2000 psi; span error: -1 ±0.25% of reading for 1000 psi; this is a systematic error which can be calibrated out prior to installation

Damping: Time constant continuously adjustable between 0.2 and 1.67 s

Process Connections: Reversible for either ¼ FNPT on 2½" centers or ½ FNPT on 2, 2½ or 2¾" centers with adaptors provided

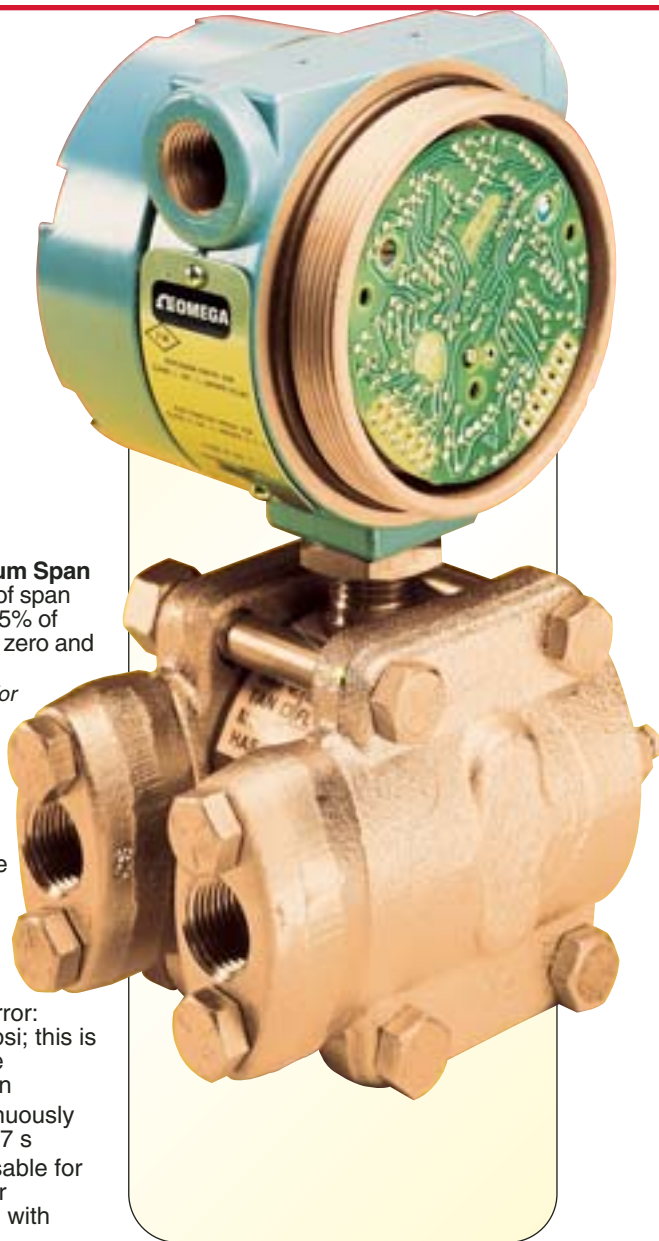

AVAILABLE FOR FAST DELIVERY!

To Order (Specify Model Number)

MODEL NO.	PRICE	LOWER RANGE DIFFERENTIAL	UPPER RANGE DIFFERENTIAL	COMPATIBLE METERS
INH₂O DIFFERENTIAL PRESSURE RANGES				
PX750-30DI	\$1805	0 to 5 inH ₂ O	0 to 30 inH ₂ O	DP41-E, DP25B-E, DP3002-E
PX750-150DI	1545	0 to 25 inH ₂ O	0 to 150 inH ₂ O	DP41-E, DP25B-E, DP3002-E
PX750-750DI	1665	0 to 125 inH ₂ O	0 to 750 inH ₂ O	DP41-E, DP25B-E, DP3002-E
HIGH DIFFERENTIAL PRESSURE RANGES				
PX750-100HDI	\$1665	0 to 17 psi	0 to 100 psi	DP41-E, DP25B-E, DP3002-E
PX750-300HDI	1665	0 to 50 psi	0 to 300 psi	DP41-E, DP25B-E, DP3002-E
PX750-1KHDI	1665	0 to 170 psi	0 to 1000 psi	DP41-E, DP25B-E, DP3002-E

SQUARE ROOT OUTPUT TRANSMITTER FOR FLOW MEASUREMENT

PX750-SQDI Series 5 to 750 inH₂O

Starts at
\$1675

- ✓ Output Linear with Flow
- ✓ High Accuracy: 0.25%
- ✓ Adjustable Damping
- ✓ Linear Zero Functions for High Stability
- ✓ Rugged NEMA 4X Industrial Enclosure

For the measurement of flow, the PX750 transmitter combines the square root extraction function within the differential pressure transmitter to provide a 4 to 20 mA signal directly proportional to flow. It is compatible with all OMEGA® 4 to 20 mA readout devices. The PX750 flow transmitter has an operable range from 20 to 100% of flow rate. No additional power supplies, wiring or additional "block boxes" are required for use with this instrument. A stable zero flow signal is achieved by electronically switching from a square root to a linear function at 20% of flow.

SPECIFICATIONS

Accuracy: ±0.25% of calibrated span for a range of 20% to 100% of flow (4% to 100% of input pressure). Includes combined effects of hysteresis, repeatability, and conformity of the square root function. Output linear with input pressure for the range of 0 to 20% of flow (0 to 4% of input pressure).

Deadband: None

Stability: ±0.25% of upper range limit for six months

Temperature Effect: The total output effect, whether at zero or full scale, including zero and span errors: ±1.5% of upper range limit per 100°F (55°C) (±0.25% for PX750-30 model)

PX750-30SQDI, \$1785, shown in typical installation with a pitot tube sensor. See the OMEGA® Flow Handbook for a complete selection of flow products.



Static Pressure Effect:

Zero Error: ±0.25% of differential pressure upper range limit for 2000 psi (13.79 MPa), ±0.5% for PX750-30

Span Error: Correctable to ±0.125% of reading per 1000 psi (6.89 MPa), ±0.25% for PX750-30 model); this is a systematic error which can be calibrated out for a particular pressure before installation.

Damping: Time constant continuously adjustable between 0.2 and 1.0 s

Static Pressure and Overpressure

Limits: 0 psia to 2000 psig (to 13.79 MPa) on either side without damage to the transmitter; operates within specifications between static line pressure of ½ psia and 2000 psig (3.44 kPa to 13.79 MPa) for silicone oil transmitters, and 10,000 psig (68.95 MPa) proof pressure on the flanges

MOST POPULAR MODELS HIGHLIGHTED

To Order (Specify Model Number)

Model No.	price	Lower Range Differential	Upper Range Differential	Compatible Meters
PX750-30SQDI	\$1785	0 to 5 inH ₂ O	0 to 30 inH ₂ O	DP41-E, DP25B-E, DP3000-E
PX750-150SQDI	1675	0 to 25 inH ₂ O	0 to 150 inH ₂ O	DP41-E, DP25B-E, DP3000-E
PX750-750SQDI	1675	0 to 125 inH ₂ O	0 to 750 inH ₂ O	DP41-E, DP25B-E, DP3000-E



UNITED STATES

www.omega.com

1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca

Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de

Deckenpfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk

Manchester, England
0800-488-488

FRANCE

www.omega.fr

Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz

Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl

Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters