


## Tactile Switch (Sealed Type)



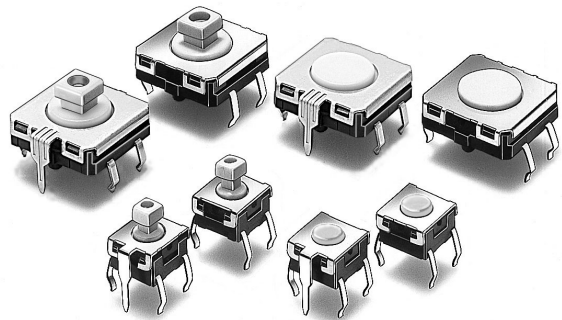

## B3W

### Allows Cleaning After Soldering with Alcohol Solvents

- Internal sealed construction allows immersion cleaning with alcohol solvents after soldering.
- Thin, compact construction in both 12 x 12 mm and 6 x 6 mm sizes.
- Snap-action contact construction for a positive click action.
- Available with ground terminals for protection against static electricity.
- Sealed construction also provides high reliability in dusty environments.



## Ordering Information


Type	Plunger	Height	Operating force (OF)		Bags (100 Switches)	
					Without ground terminal	With ground terminal
6 x 6 mm B3W-1000	Flat type 	4.3 mm	Standard force	1.57 N {160 gf}	B3W-1000	B3W-1100
			High-force	2.25 N {230 gf}	B3W-1002	B3W-1102
	Projected type 	7.3 mm	Standard force	1.57 N {160 gf}	B3W-1050	B3W-1150
			High-force	2.25 N {230 gf}	B3W-1052	B3W-1152
12 x 12 mm B3W-4000	Flat type 	4.3 mm	Standard force	1.96 N {200 gf}	B3W-4000	B3W-4100
			High-force	3.43 N {350 gf}	B3W-4005	B3W-4105
	Projected type 	7.3 mm	Standard force	1.96 N {200 gf}	B3W-4050	B3W-4150
			High-force	3.43 N {350 gf}	B3W-4055	B3W-4155

**Note:** Orders must be made in units of 100 pieces (quantity per bag).

### ■ Accessories (Order Separately)

Special Key Tops are available for projected Switch models. See page 39.

## Nomenclature

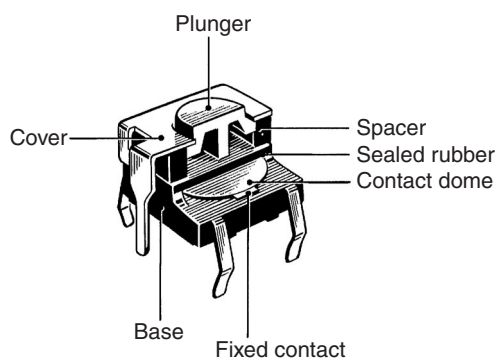

## Specifications

### ■ Ratings/Characteristics

<b>Switching capacity</b>	1 to 50 mA, 5 to 24 VDC (resistive load)
<b>Ambient temperature</b>	-25°C to 70°C (with no icing)
<b>Ambient humidity</b>	35% to 85%
<b>Contact configuration</b>	SPST-NO
<b>Contact resistance</b>	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
<b>Insulation resistance</b>	100 MΩ min. (at 250 VDC)
<b>Dielectric strength</b>	500 VAC, 50/60 Hz for 1 min
<b>Bounce time</b>	5 ms max.
<b>Vibration resistance</b>	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
<b>Shock resistance</b>	Destruction: 1,000 m/s <sup>2</sup> {approx. 100 G} max. Malfunction: 100 m/s <sup>2</sup> {approx. 10 G} max.
<b>Life expectancy</b>	B3W-1000: 1.57 N (standard force):1,000,000 operations min. 2.26 N (high-force):300,000 operations min. B3W-4000: 1.96 N (standard force):3,000,000 operations min. 3.43 N (high-force):1,000,000 operations min.
<b>Weight</b>	6 x 6 mm: approx. 0.3 g, 12 x 12: approx. 1 g

### ■ Operating Characteristics

Item	B3W-1000		B3W-4000	
	1.57 N	2.26 N	1.96 N	3.43 N
Operating force (OF)	1.57 N {160 gf} max.	2.26 N {230 gf} max.	1.96 N {200 gf} max.	3.43 N {350 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.	0.29 N {30 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 <sup>+0.2</sup> / <sub>-0.1</sub> mm		0.3 <sup>+0.2</sup> / <sub>-0.1</sub> mm	

# Dimensions


- Note:** 1. All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.
2. No terminal numbers are indicated on the Switches. The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up.




## ■ 6 x 6 mm Models

### Flat Plunger Type (without Ground Terminal)


B3W-1000  
B3W-1002

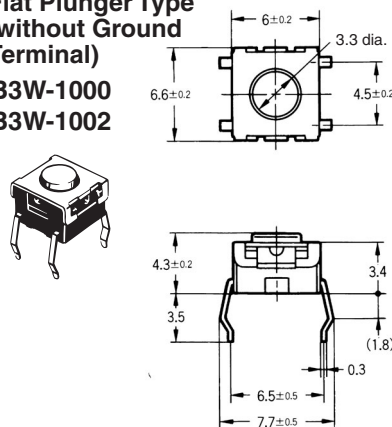

PCB Mounting (Top View)  
(Single-sided PCB, t=1.6)

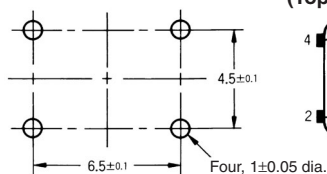


Terminal Arrangement  
/Internal Connections  
(Top View)




### Flat Plunger Type (with Ground Terminal)


B3W-1100  
B3W-1102

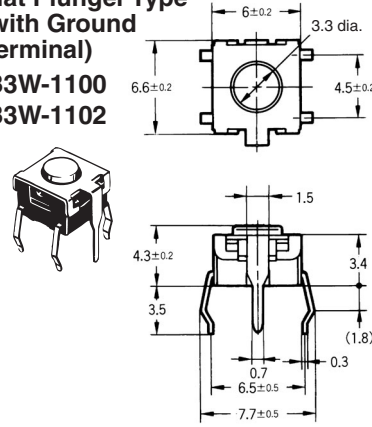

PCB Mounting (Top View)  
(Single-sided PCB, t=1.6)

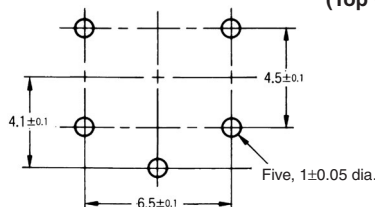


Terminal Arrangement  
/Internal Connections  
(Top View)




### Projected Plunger Type (without Ground Terminal)


B3W-1050  
B3W-1052

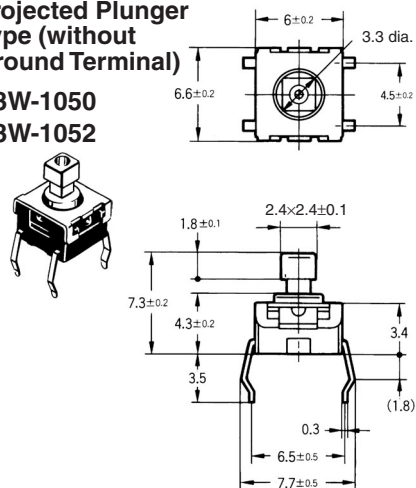

PCB Mounting (Top View)  
(Single-sided PCB, t=1.6)

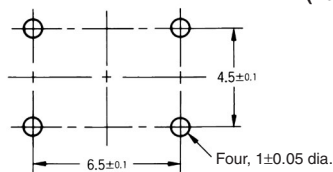


Terminal Arrangement  
/Internal Connections  
(Top View)




### Projected Plunger Type (with Ground Terminal)


B3W-1150  
B3W-1152

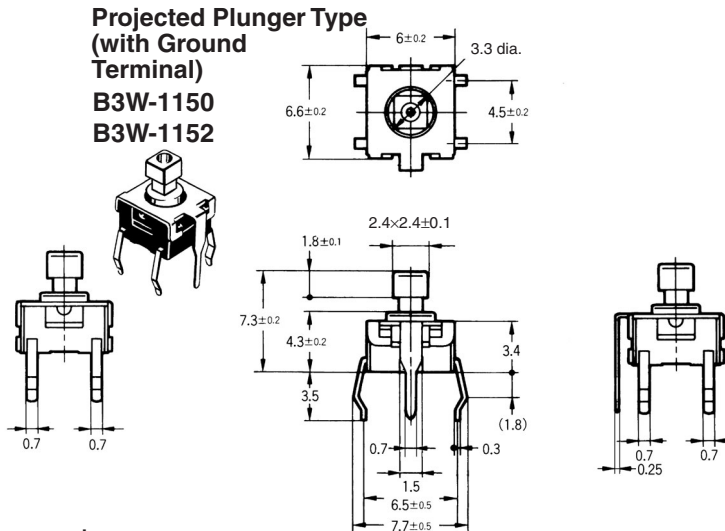

PCB Mounting (Top View)  
(Single-sided PCB, t=1.6)

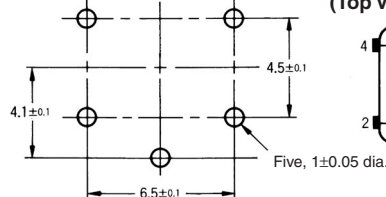


Terminal Arrangement  
/Internal Connections  
(Top View)




## ■ 12 x 12 mm Models

### Flat Plunger Type (without Ground Terminal)


B3W-4000  
B3W-4005

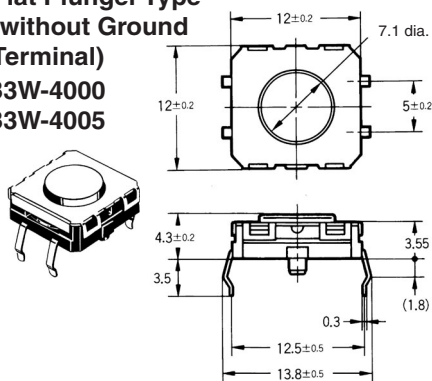

#### PCB Mounting (Top View) (Single-sided PCB, t=1.6)

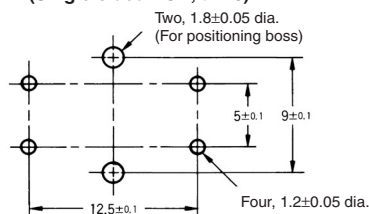


#### Terminal Arrangement /Internal Connections (Top View)




### Flat Plunger Type (with Ground Terminal)


B3W-4100  
B3W-4105

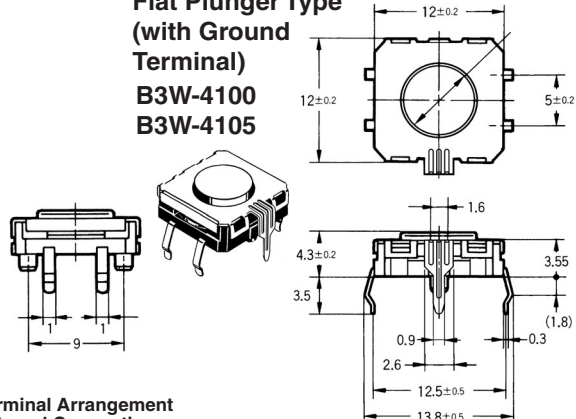

#### PCB Mounting (Top View) (Single-sided PCB, t=1.6)

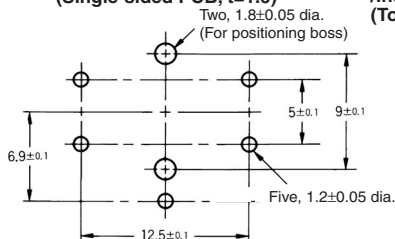


#### Terminal Arrangement /Internal Connections (Top View)




### Projected Plunger Type (without Ground Terminal)


B3W-4050  
B3W-4055

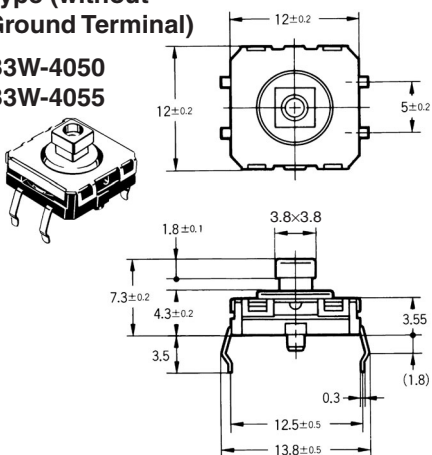

#### PCB Mounting (Top View) (Single-sided PCB, t=1.6)

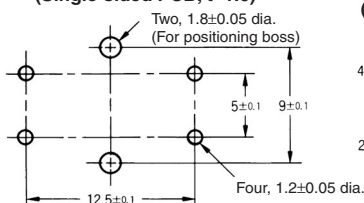


#### Terminal Arrangement /Internal Connections (Top View)




### Projected Plunger Type (with Ground Terminal)


B3W-4150  
B3W-4155

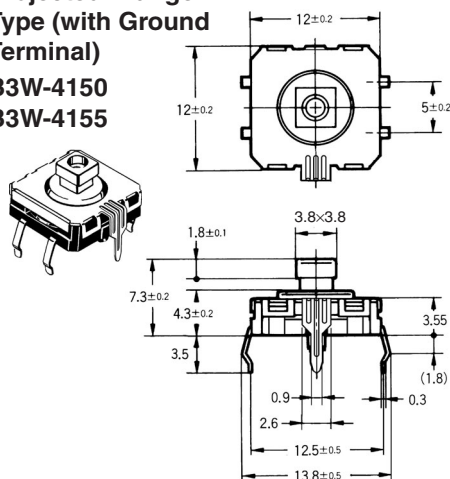

#### PCB Mounting (Top View) (Single-sided PCB, t=1.6)

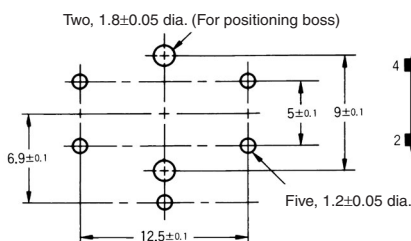

#### Terminal Arrangement /Internal Connections (Top View)



## Key Tops

B32-series Special Key Tops are available for projected plunger models. Refer to page 42 for details.

## Precautions

---

Be sure to read the precautions common to all Tactile Switches on pages 5 to 7 for correct use.

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.


## Tactile Switch Key Top

## B32

**Key Top Designed Specially for  
Projected-plunger-type B3F, B3FS, and  
B3W Switches**

■ Available in a wide range of colors and sizes.

RoHS Compliant (Refer to page 8 for details.)

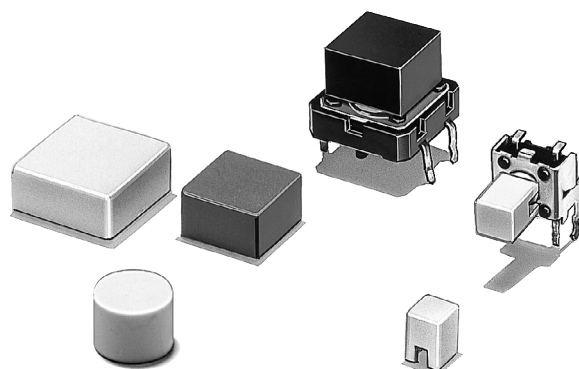

## Ordering Information

For B3F, B3FS, and B3W Switches

Color	6 × 6 mm Switches (B3F-1000, B3F-3000, B3F-6000, B3W-1000, B3FS)			12 × 12 mm Switches (B3F-4000, B3F-5000, B3W-4000)		
	4 × 4 mm Key Top	6 mm dia. Key Top	D-type Key Top	9 × 9 mm Key Top	12 × 12 mm Key Top	9.5-mm dia.
Light gray	B32-1000	B32-2000	B32-2100	B32-1200	B32-1300	B32-1600
Black	B32-1010	B32-2010	B32-2110	B32-1210	B32-1310	B32-1610
Orange	B32-1020	---	---	B32-1220	B32-1320	B32-1620
Yellow	B32-1030	---	---	B32-1230	B32-1330	B32-1630
Blue	B32-1040	---	---	B32-1240	B32-1340	---
White	B32-1060	---	---	B32-1260	B32-1360	---
Red	B32-1080	---	---	B32-1280	B32-13880	---

**Note:** The minimum order unit is 1,000 Switches per package. Orders must be made in multiples of the minimum order unit.

## Specifications


### ■ Characteristics

Ambient operating temperature	–25°C to 70°C at 60% max. humidity (with no icing or condensation)
Ambient operating humidity	35% to 85% (at 5 to 35°C)


# Dimensions

**Note:** All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.


## B32-10□0




### Reference Dimensions

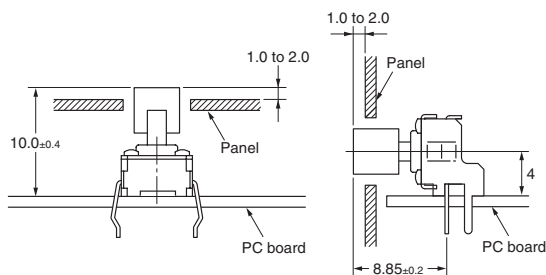


### Panel Cutout




## B32-2000 B32-2010




### Reference Dimensions

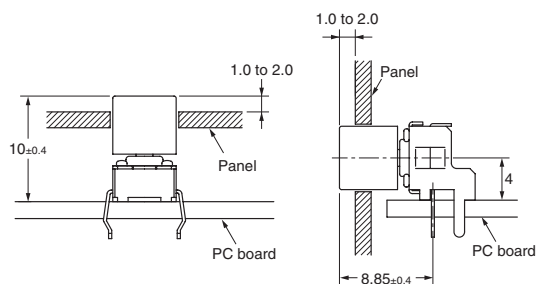


### Panel Cutout




## B32-2100 B32-2110




### Reference Dimensions

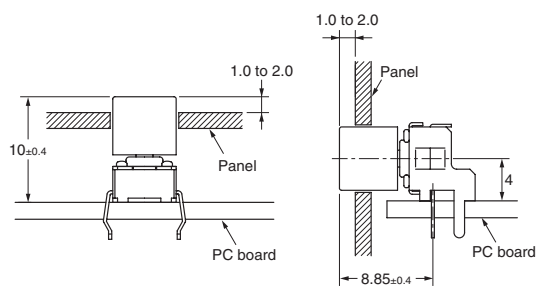


### Panel Cutout




## B32-12□0

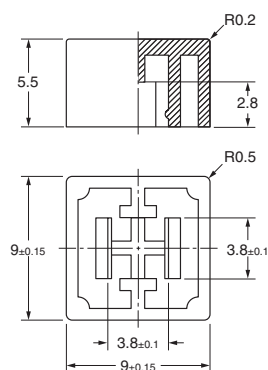



### Reference Dimensions




### Panel Cutout




## B32-13□0

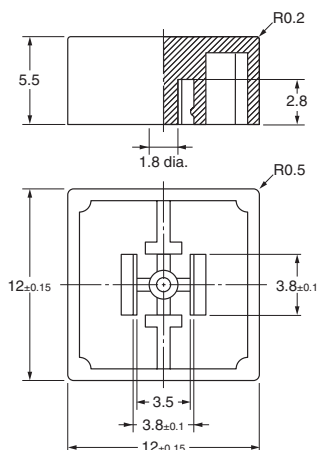


## Reference Dimensions

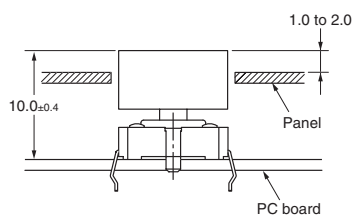


## Panel Cutout




## B32-16□0

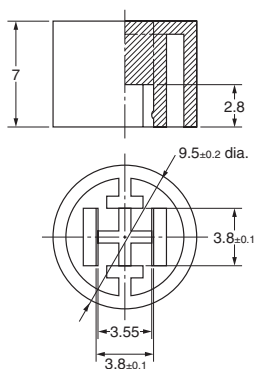

## Reference Dimensions

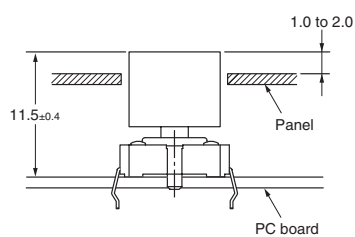

## Panel Cutout



**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



# Safety Precautions

## ■ Precautions for Safe Use

Use the Switch within the rated voltage and current ranges, otherwise the Switch may have a shortened life expectancy, radiate heat, or burn out. This particularly applies to the instantaneous voltages and currents when switching.

## ■ Precautions for Correct Use

### Storage

To prevent degradation, such as discoloration, in the terminals during storage, do not store the Switch in locations that are subject to the following conditions.


1. High temperature or humidity
2. Corrosive gases
3. Direct sunlight

### Handling

#### 1. Operation


Do not repeatedly operate the Switch with excessive force. Applying excessive pressure or applying additional force after the plunger has stopped may deform the disc spring of the Switch, resulting in malfunction. In particular, applying excessive force to Side-operated Switches may damage the caulking, which in turn may damage the Switch. Do not apply force exceeding the maximum (29.4 N for 1 minute, one time) when installing or operating Side-operated Switches.

Be sure to set up the Switch so that the plunger will operate in a straight vertical line. A decrease in the life of the Switch may result if the plunger is pressed off-center or from an angle.

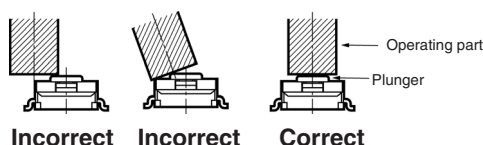

#### 2. Dust Protection

Do not use Switches that are not sealed in dust-prone environments. Doing so may cause dust to penetrate inside the Switch and cause faulty contact. If a Switch that is not sealed must be used in this kind of environment, use a sheet or other measure to protect it against dust.



### PCBs

The Switch is designed for a 1.6-mm thick, single-side PCB.

Using PCBs with a different thickness or using double-sided, through-hole PCBs may result in loose mounting, improper insertion, or poor heat resistance in soldering. These effects will occur, depending on the type of holes and patterns of the PCB. Therefore, it is recommended that a verification test is conducted before use.

If the PCBs are separated after mounting the Switch, particles from the PCBs may enter the Switch. If PCB particles or foreign particles from the surrounding environment, workbench, containers, or stacked PCBs become attached to the Switch, faulty contact may result.

### Soldering

#### 1. General Precautions

Before soldering the Switch on a multilayer PCB, test to confirm that soldering can be performed properly. Otherwise the Switch may be deformed by the soldering heat on the pattern or lands of the multilayer PCB.

Do not solder the Switch more than twice, including rectification soldering. An interval of five minutes is required between the first and second soldering.

#### 2. Automatic Soldering Baths (B3F, B3W, B3WN, B3M, B3J)


Soldering temperature: 260°C max.

Soldering time: 5 s max. for a 1.6-mm thick single-side PCB

Preheating temperature: 100°C max. (ambient temperature)

Preheating time: Within 60 s


Make sure that no flux will rise above the level of the PCB. If flux overflows onto the mounting surface of the PCB, it may enter the Switch and cause a malfunction.



#### 3. Reflow Soldering (Surface Mounting)

Solder the terminals within the heating curve shown in the following diagram.

##### B3S, B3SN, B3FS

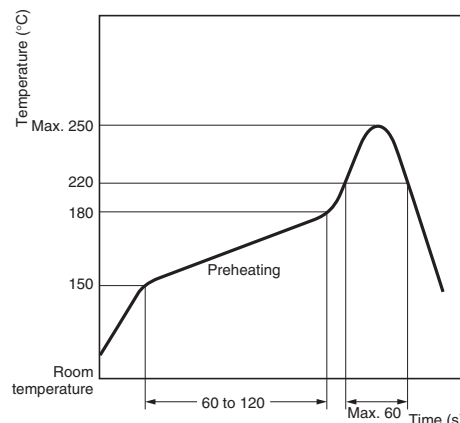

**Note:** The above heating curve applies if the PCB thickness is 1.6 mm.

The peak temperature may vary depending on the reflow bath used. Confirm the conditions beforehand.

Do not use an automatic soldering bath for surface-mounted Switches. The soldering gas or flux may enter the Switch and damage the Switch's push-button operation.

#### 4. Manual Soldering (All Models)

Soldering temperature: 350°C max. at the tip of the soldering iron  
Soldering time: 3 s max. for a 1.6-mm thick, single-side PCB

Before soldering the Switch on a PCB, make sure that there is no unnecessary space between the Switch and the PCB.

### Washing

#### 1. Washable and Non-washable Models

<b>Washable (sealed types)</b>	B3W, B3WN, B3S, B3SN
<b>Non-washable (standard types)</b>	B3F, B3FS, B3M, B3J, B3DA, B3D

Standard Switches are not sealed, and cannot be washed. Doing so will cause the washing agent, together with flux or dust particles on the PCB, to enter the Switch, resulting in malfunction.

## 2. Washing Methods

Washing equipment incorporating more than one washing bath can be used to clean washable models, provided that the washable models are cleaned for one minute maximum per bath and the total cleaning time does not exceed three minutes.

## 3. Washing Agents

Apply alcohol-based solvents to clean washable models. Do not apply any other agents or water to clean any washable model, as such agents may degrade the materials or performance of the Switch.

## 4. Washing Precautions

Do not impose any external force on washable models while washing.


Do not clean washable models immediately after soldering. The cleaning agent may be absorbed into the Switch through respiration as the Switch cools. Wait for at least three minutes after soldering before cleaning washable models.

Do not use Sealed Switches while submersed in water or in locations exposed to water.

## Switch Packaging (Taping Specification Models)

### 1. Radial Types

The tape is packaged by fan-folding into the box, as shown in the following diagram.

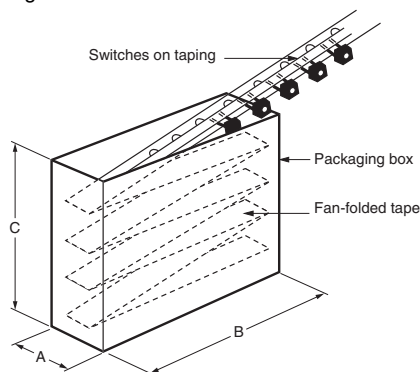



Model	A	B	C
B3F	50 mm	325 mm	275 mm
B3WN	53 mm	326 mm	350 mm

Do not apply any external force to the packaging box, or subject it to vibration. Doing so may deform the Switch terminals.

Remove the tape slowly, making sure that the Switches are not entangled or caught. Otherwise the terminals may be deformed.

Do not store the packaged Switches in locations subject to high temperatures or high humidity. The packaging boxes are sealed with paper tape and are not airtight. Storing the packaged Switches in locations with high temperature or high humidity may result in deterioration of the tape and Switches, and long-term storage under such conditions may cause discoloration of the Switch terminals.


### 2. Packaging Specifications for Embossed Taping (B3FS-1000P/-1002P, B3SN)

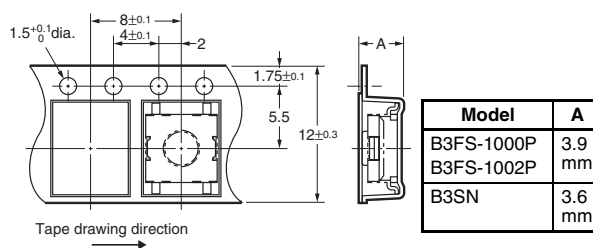


<b>Standards</b>	Conforms to JEITA.
<b>Package</b>	3,000 Switches
<b>Heat resistance</b>	50°C for 24 hours (without deformation)

**Note:** Switches with ground terminals are packaged with the ground terminal on the opposite side of the guide hole.


### B3FS-1010P

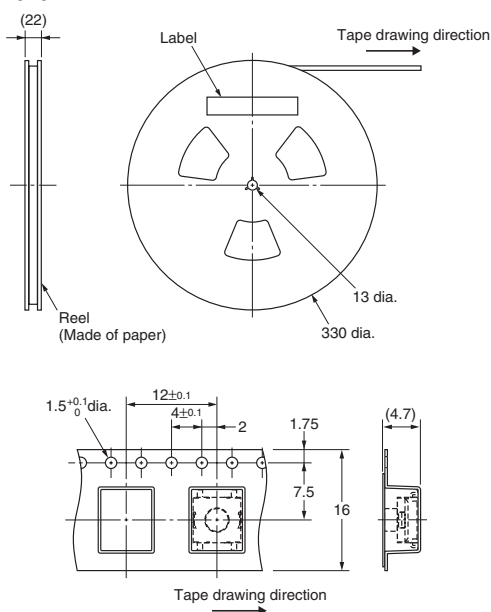

<b>Standards</b>	Conforms to JEITA.
<b>Package</b>	1,000 Switches
<b>Heat resistance</b>	60°C for 24 hours (without deformation)

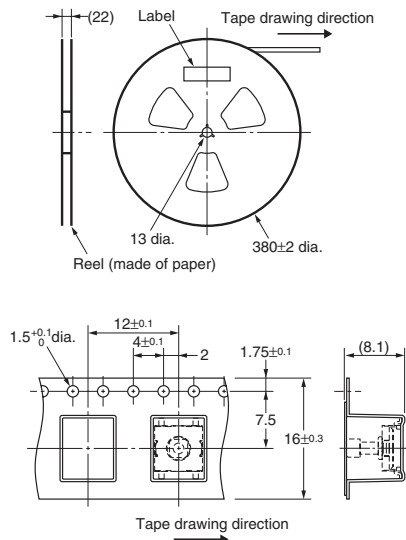**B3FS-1050P**

<b>Standards</b>	Conforms to JEITA.
<b>Package</b>	1,000 Switches
<b>Heat resistance</b>	60°C for 24 hours (without deformation)

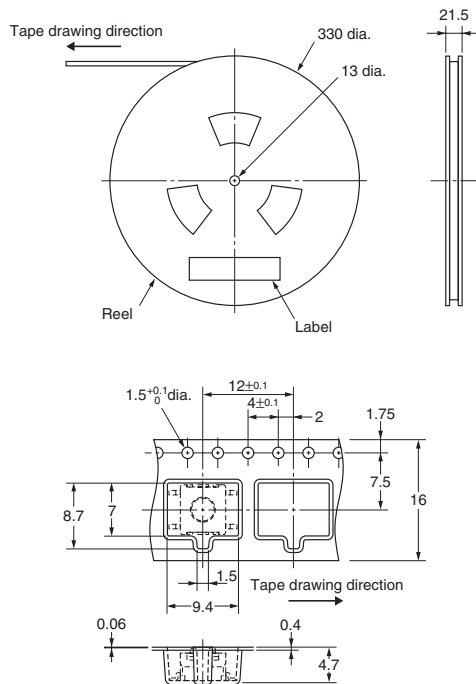**B3S**

<b>Standards</b>	Conforms to JEITA.
<b>Package</b>	1,000 Switches
<b>Heat resistance</b>	50°C for 24 hours (without deformation)

**Note:** Switches with ground terminals are packaged with the ground terminal on the opposite side of the guide hole.

**LEDs (B3J)**

Make sure that the polarity of the LEDs is correct. The polarity is not indicated on the Switch, but the positive pole is located on the back surface of the Switch on the side without the OMRON mark.

Connect limiting resistors to the LEDs. The Switch does not have built-in limiting resistors, so satisfy the LED characteristics by obtaining the limiting resistance according to the following formula based on the voltage to be used.

$$\text{Limiting resistance (R)} = \frac{(\text{Voltage used (E)} - \text{LED forward voltage (VF)})}{\text{LED forward current (IF)}} \quad (\Omega)$$

