



# TCP 350 drive electronics






## TCP 350 drive electronics

- Drive electronics including power supply and Display Control Unit
- The TCP 350 drive electronics unit is employed for driving and monitoring the HiPace 80, 300, 400, 700 und 800
- Pfeiffer Vacuum ActiveLine gauge connection (except hot cathode)
- Interface RS-485
- Mating plug for "Remote" connector included in scope of delivery

### Dimensions

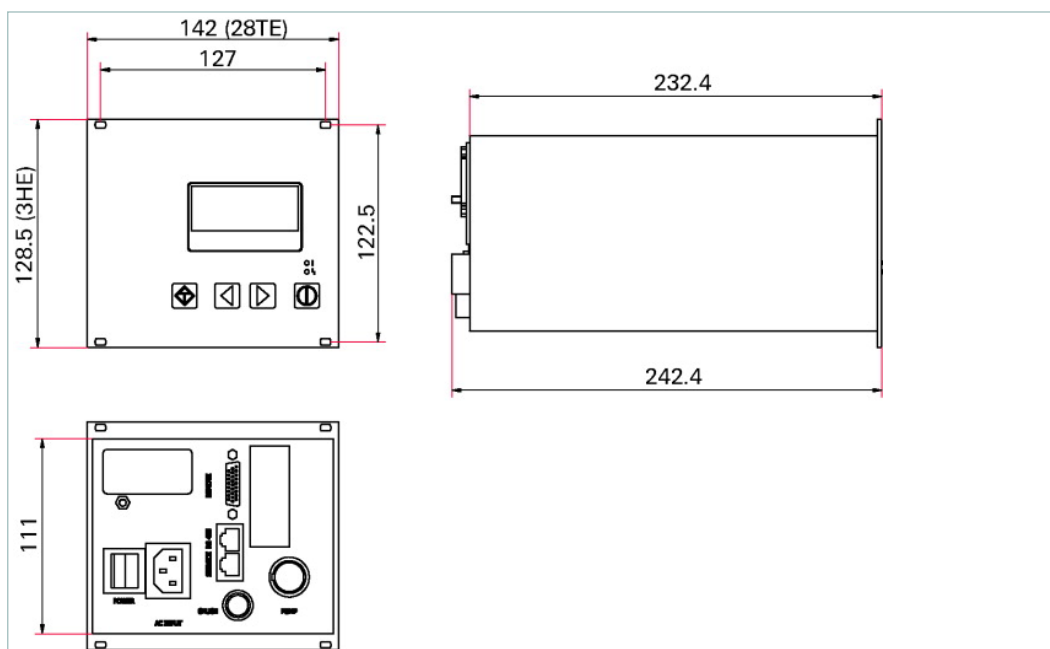

### Technical Data

### TCP 350 drive electronics

Ambient temperature	5-40 °C   41-104 °F   278-313 K
Cable length Turbo-TCP max.	100 m
Frequency	50/60 Hz
Interface	RS-485
Mains requirement: power consumption	400 VA
Mains requirement: voltage (range)	95-265 V AC
Power supply	TCP 350
Protection category	IP 20
Weight	2.8 kg   6.17 lb

### Order number

TCP 350

**PM C01 740**

Accessories	
<b>Accessory external drive units</b>	
Adapter cable, TCP 350 - backing pump relay box, M12	PM 061 377 -T
Adapter cable, TCP 350 - backing pump relay box, M8	PM 061 376 -T
<b>Connection cables</b>	
Connection cable from TCP 350 to HiPace with 2 accessory ports M12, 3 m	PM 061 356 -T
Connection cable from TCP 350 to HiPace with 2 accessory ports M8, 3 m	PM 061 353 -T
<b>Mains cables</b>	
Mains cable 115 V AC, NEMA 5-15 to C13, 3 m	P 4564 309 ZE
Mains cable 208 V AC, NEMA 6-15 to C13, 3 m	P 4564 309 ZF
Mains cable 230 V AC, CEE 7/7 to C13, 3 m	P 4564 309 ZA

**Vacuum solutions  
from a single source**

Pfeiffer Vacuum stands for innovative and custom vacuum solutions worldwide, technological perfection, competent advice and reliable service.

**Complete range  
of products**

From a single component to complex systems:  
We are the only supplier of vacuum technology  
that provides a complete product portfolio.

**Competence in  
theory and practice**

Benefit from our know-how and our portfolio of training opportunities! We support you with your plant layout and provide first-class on-site service worldwide.

**Are you looking for a  
perfect vacuum solution?  
Please contact us:**

**Pfeiffer Vacuum GmbH**  
Headquarters · Germany  
T +49 6441 802-0  
[info@pfeiffer-vacuum.de](mailto:info@pfeiffer-vacuum.de)  
[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)