

Sockets




Care has been taken in the design and manufacture of these sockets. High-grade insulating and contact materials ensure optimal results over a long operating life.


The data given in Part 4 of this catalogue are only guaranteed when the tubes are used with the original PHOTONIS sockets.

A PHOTONIS PMT and a PHOTONIS socket - the perfect match.


for 19 mm tube

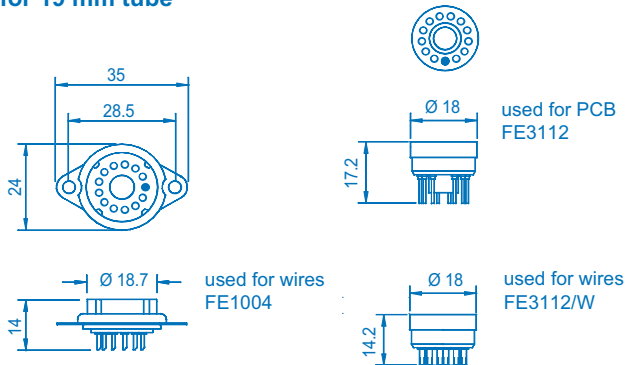


for 25 mm tubes

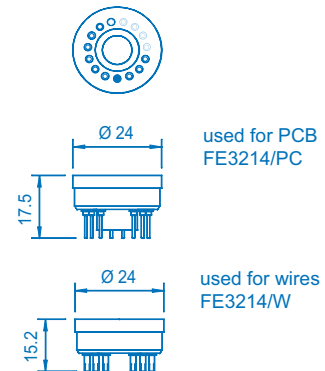

for 29 mm tubes

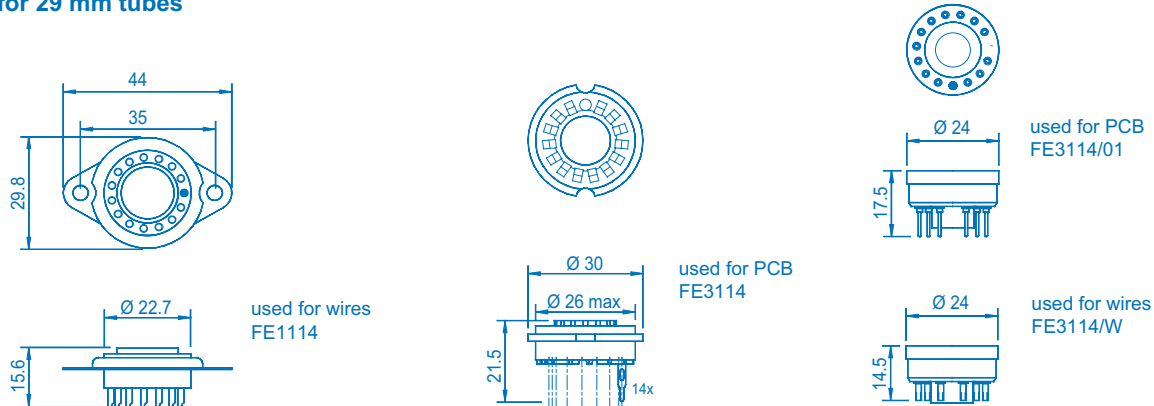


for 39 mm tubes

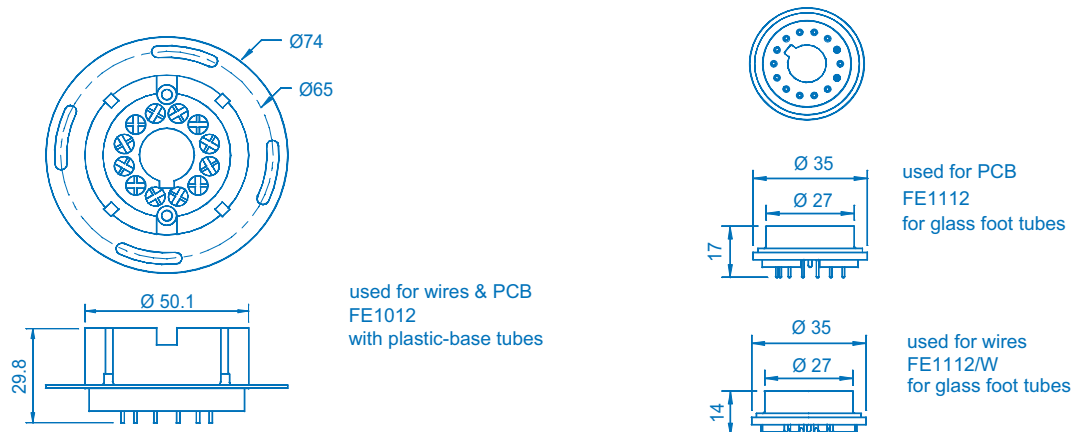


nominal dimensions in mm

for XP3062




used for PCB
FE1113
for XP3062




used for wires
FE1113/W
for XP3062


for 51 mm tubes and bigger

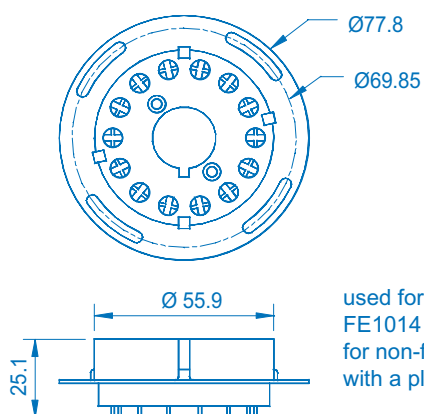


used for wires & PCB
FE1014
for non-fast tubes
with a plastic base

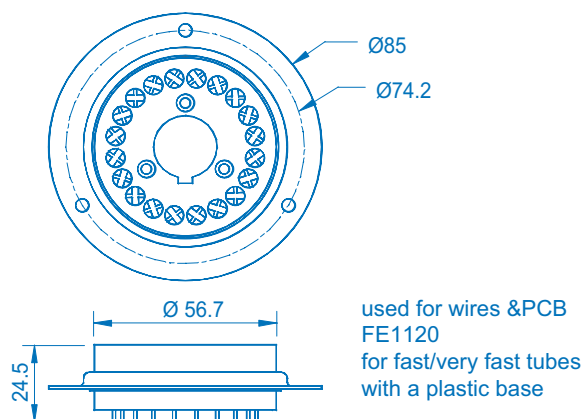

used for wires & PCB
FE1120
for fast/very fast tubes
with a plastic base

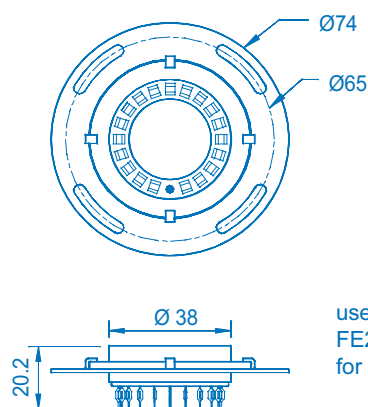


used for wires & PCB
FE2019
for glass-foot tubes

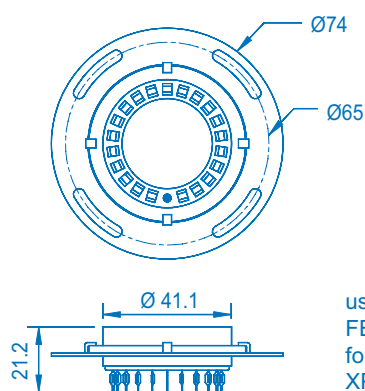


used for wires & PCB
FE2021
for XP1802, XP2220,
XP2228 and XP22K0


for multipixel tubes

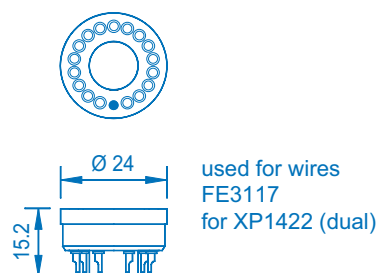

used for wires
FE3117
for XP1422 (dual)



used for wires
FE3123
for XP1452

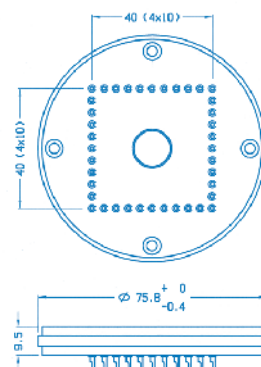

used for wires
FE3139
for XP1472

nominal dimensions in mm