

30 Amp Power PCB Relay

PTRH



C **US E86876**

Load Type	Voltage	1 Form A (SPST-NO)	1 Form B (SPDT-NC)	1 Form C	
				NO	NC
General Purpose	120 VAC	30 A	20 A	30 A	20 A
	250 VAC	30 A	20 A	30 A	20 A
	30 VDC	30 A	20 A	30 A	20 A
Resistive (100,000 Cycles)	120 VAC	30 A	20 A	30 A	20 A
	250 VAC	30 A	20 A	30 A	20 A
Motor (30,000 Cycles)	240 VAC	2 HP	---	2 HP	---
	120 VAC	1 HP	---	1 HP	---
LRA/FLA	240 VAC	80 A/30 A	---	80 A/30	---
	120 VAC	96 A/30 A	---	96 A/30	---

CHARACTERISTIC

Operate Time	Less than 15 ms
Release Time	Less than 10 ms
Insulation Resistance	1,000 MΩ min, at 500 VDC, 50% RH
Dielectric Strength	50 Hz 2,500 V 1 Min Between Coil and Contacts
	4,000 V without Pin 6 50 Hz 1,500 V 1 min. Between Contacts
Shock Resistance	200 m/s, 11 ms
Power Consumption	0.9 W, 0.6 W

ORDERING INFORMATION

Example:	PTRH	-1C	-12	S		-1	-X
Model:	PTRH						
Contact Form:	1A, 1B, 1C						
Coil Voltage:	3, 5, 6, 9, 12, 15, 24, 28, 48, 110						
Enclosure:	Nil: Open Frame; S: Sealed; E: Covered C: Dust Cover						
Coil Sensitivity:	Nil: 0.9 W; 0.6: 0.6 W; 1.1: 1.1 W						
Contact Material:	Nil: AgCdO; T: AgSnO ₂						
Spacing:	Nil: UL508; -1: UL 508 and UL 873 (Pin #6 Omitted)						
RoHS Compliant:	-X						

Box Quantity: 600; Inner Box 300

FEATURES

- Most Popular Power PCB Relay Footprint - T90
- 30 Amp 250 VAC General Purpose UL Rating
- 2 HP 250 VAC Rating
- UL Class F Insulation Standard
- Gold Flashed Contacts Available
- Meets UL 508 and UL 873 Spacing with Pin 6 Omitted
- Epoxy Sealed, Immersion Cleanable
- RoHS Compliant

CONTACT DATA

Material	AgSnO ₂ , AgSnO ₂	
Initial Contact Resistance	50 MΩ Max. @ 1 A, 6 VDC	
Maximum Switching Voltage	110 VDC, 300 VAC	
Maximum Switching Current	30 A	
Maximum Switching Power	1,500 W, 12,000 VA	
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	5 X 10 ⁴ Operations

With Pin 6 Omitted (-1) Meets UL 508 and UL 873 Spacing - 3.18 mm Through Air, 6.36 mm Over Surface. With Pin 6 Meets UL508

CHARACTERISTIC Continue

Vibration Resistance	10 - 55 Hz Double Amplitude
Terminal Strength	10N
Solderability	235 °C for 3 secs
Operating Temperature Range	-40°C to 125°C
Storage Temperature Range	-40°C to 155°C
Relative Humidity	85% (at 40°C)
Weight	13.5 gr Approximately
Material Compliant To	EU RoHS V2, EU REACH V3

COIL DATA

Coil Voltage		Coil Power (W)			Coil Power (W)		Must Release Voltage Min (VDC)
		Resistance (Ohms ± 10%)			Must Operate Voltage Max (VDC)		
Rated	Max	0.6 W	0.9 W	1.1 W	0.6 W & 0.9 W	1.1 W	
3	3.9	15	10	——	2.25	——	0.3
5	6.5	42	28	——	3.75	——	0.5
6	7.8	60	40	33	4.50	4.8	0.6
9	11.7	135	90	——	6.75	——	0.9
12	15.6	240	150	131	9.00	9.6	1.2
15	19.5	375	260	——	10.25	——	1.5
18	23.4	540	380	——	13.50	——	1.8
24	31.2	960	640	524	18.00	19.2	2.4
28	36.4	1307	871	713	21.0	22.4	2.8
48	62.4	3840	2560	2095	36.00	38.4	4.8
110	143	20167	13445	——	82.50	——	11.0






NOTES:

The use of any coil voltage less than the rated voltage will compromise the operation of the relays. Must Operate Voltage is listed for test purposes only and is not to be used as design criteria. Pickup and release voltages are for test purposes only and are not to be used as design criteria.


Dimensions are in mm, Inches are listed for reference only.

DIMENSIONS (mm/inches)


Knock off, on top corner, nib for ventilation after soldering and water wash.

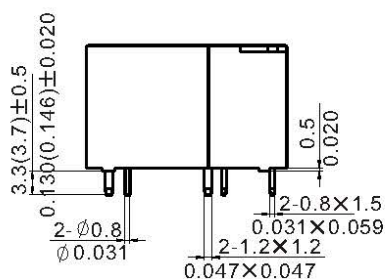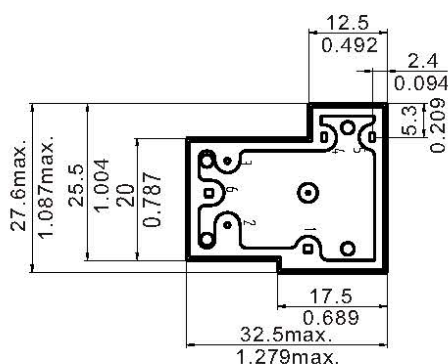

Open type

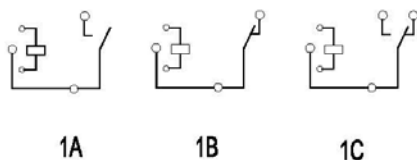


Wiring diagram(Bottom view)



(-1)

Mounting (Bottom view)



Available with Pin 6 UL508 or Without Pin 6 UL873 (-1)

p



3220 Commander Drive, Suite 102 Carrollton, TX 75006

Sales: (972) 713-6272

(888) 997-3933

Fax: (972) 735-0964

www.PickerComponents.com

e-mail: sales@pickercomponents.com