

Struthers-Dunn
2295 Hoffmeyer Rd
Florence, South Carolina
29501-7306

Telephone: (843)664-3303 Fax: (843)662-8862
Email: info@struthers-dunn.com Website: www.struthers-dunn.com


Item # 134MPCX-2-12VDC, 134 Series - Mercury Reed Relays

134 Series - Mercury Reed Relays

The 134 series are single throw, normally open, miniature mercury reed relays. Reeds are hermetically sealed in glass tubes with trace amounts of liquid mercury to provide continuously refreshed contact surfaces for extremely long life.

The 131 series offers double throw contacts. Both are capable.

For Additional Configuration please contact the manufacturer.

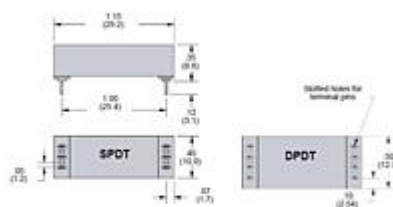

[SPECIFICATIONS](#) · [MAXIMUM CONTACT RATING](#) · [CONTACTS](#) · [COIL](#) · [TIMING](#) · [DIELECTRIC STRENGTH](#) · [CAPACITANCE](#) · [TEMPERATURE](#) · [LIFE EXPECTANCY](#) · [MISCELLANEOUS](#)

SPECIFICATIONS

Series	134
Contact Arrangement	SPDT Mercury
Nominal Input Voltage	12 VDC
Maximum Pull-in	9
Minimum Dropout	1
Nominal Resistance	330 ohms
Nominal Power	435 mW

MAXIMUM CONTACT RATING

Maximum Switching Load	50 VA
------------------------	-------

Switching Current and Voltage	1 Amps 500VDC
Carry Current	2 A

CONTACTS

Contact Configuration	Up To DPDT
Contact Material	Liquid Mercury
Contact Rating	2 A
Contact Rating Load (maximum)	50 VA
Contact Rating Switching Voltage (maximum)	500 VDC
Contact Rating Switching Current (maximum)	2 A
Contact Rating Carry Current (maximum)	3 A
Contact Resistance, Initial	100 milliohms max at 6VDC

COIL

Coils Available	DC
Coil Power	Varies
Input Voltage Tolerance - DC	80% to 110% of nominal
Drop-out voltage	10% of nominal
Duty	Continuous

TIMING

Operate Time (typical w/o suppression)	2 ms
Release Time (typical w/o suppression)	2.5 ms

DIELECTRIC STRENGTH

Across Open Contacts	1,000 Vrms
Between Mutually Insulated Point	1,000 Vrms
Insulation Resistance	1,000 megohms at 500VAC

CAPACITANCE

Capacitance Across Open Contacts	0.9pF
----------------------------------	-------

TEMPERATURE

Operating	-37 to 85 °C -34.6 to 185 °F
Storage	-40 to 105 °C -40 to 221 °F

LIFE EXPECTANCY

Electrical (full load)	40,000,000
Mechanical (no load)	100,000,000

MISCELLANEOUS

Mounting Position	Vertical $\pm 15^\circ$
Enclosure	Epoxy Encapsulated
Weight	Varies