


Heavy Duty Reliability and Versatility

The "NEW" Unistrut Channel Caster eliminates material handling problems. This caster allows for 1-5/8" Unistrut Metal Framing to be easily transformed into a versatile, mobile cart or dolly. The polyolefin wheels keep the caster free from corrosion while providing a smooth, sturdy, rolling surface. These casters are available in multiple load ratings to accommodate most applications.

Features:

- Quick and easy to assemble or disassemble – builds up or breaks down in seconds
- Simple one bolt design
- No drilling, tapping or welding
- Mount and move tool boxes, machines, benches and saws for mobility


Series 40 Swivel Caster

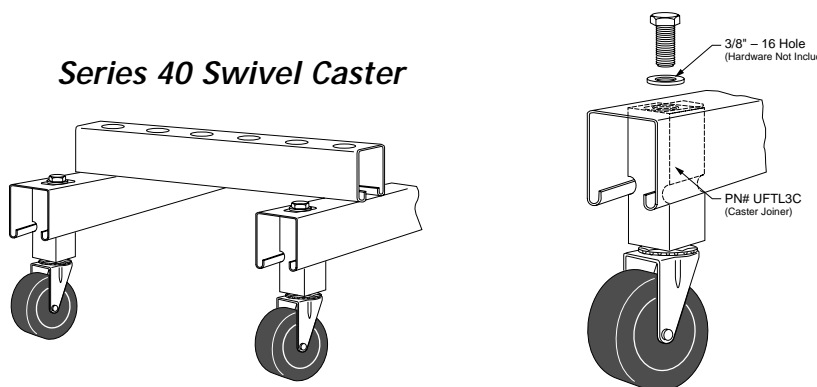


Note: Caster Joiners are required to attach the caster to 1-5/8" Unistrut Metal Framing. Caster Joiners must be ordered separately and require:

- 1 – 3/8"-16 diameter fastener (PN#HHCS037100EG) and
- 1 – 3/8" diameter washer (PN#HFLW037EG).

Make pull carts with Series 40 and Series 60 casters

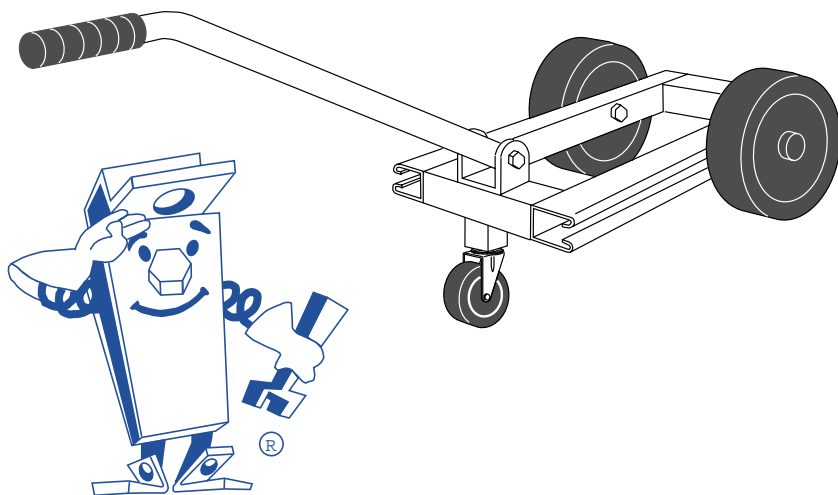

Make pull carts and dollies out of Unistrut Metal Framing

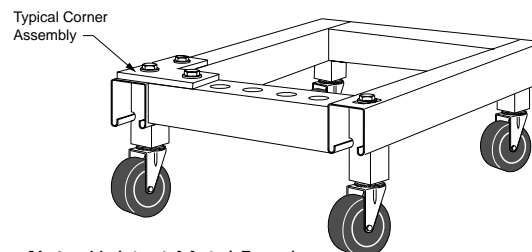

Note: Unistrut Metal Framing comes in 10 foot lengths or can be cut to any desired length.

Distributed by: **UNISTRUT**

1140 West Thorndale Ave.
Itasca, IL 60143
Toll Free: (800) 468-9510
Tel: (630) 773-3460
Fax: (630) 773-4214

tyco

Flow Control

Unistrut

Part No.	Series	Load Rating	List Price
P2960-302S	30 Dual Wheel/Swivel	125 lbs./wheel	\$19.50 each
P2960-403S	40 Single Wheel/Swivel	250 lbs./wheel	\$20.00 each
P2960-403R	40 Single Wheel/Rigid	250 lbs./wheel	\$20.00 each
P2960-908P	60 Single Wheel/Rigid	600 lbs./wheel	\$36.00 each
UFTL3C	Caster Joiner	600 lbs./wheel	\$ 8.80 each