



## **INSTALLATION OF THE VMIACC-0130 P2 POWER ADAPTER FOR THE VMIVME-1129**

The VMIACC-0130 is designed to be used in conjunction with the VMIVME-1129 digital input board. Use the following procedure to install the VMIACC-0130.

### **WARNING**

**DO NOT PERFORM THIS PROCEDURE WITH POWER APPLIED.**

### **PROCEDURE**

1. Install the power (E1) and ground (E2) connections to the VMIACC-0130 using a minimum wire size of 12 AWG and ring lugs that are capable of handling the wire size chosen.
2. Install the VMIACC-0130 (power and ground connected) to the P2 connector on the backplane that has the VMIVME-1129 installed in that slot. Orient the VMIACC-0130 such that the a1 silk screen matches a1 on the backplane.
3. Power may be applied at this time for test of proper installation.

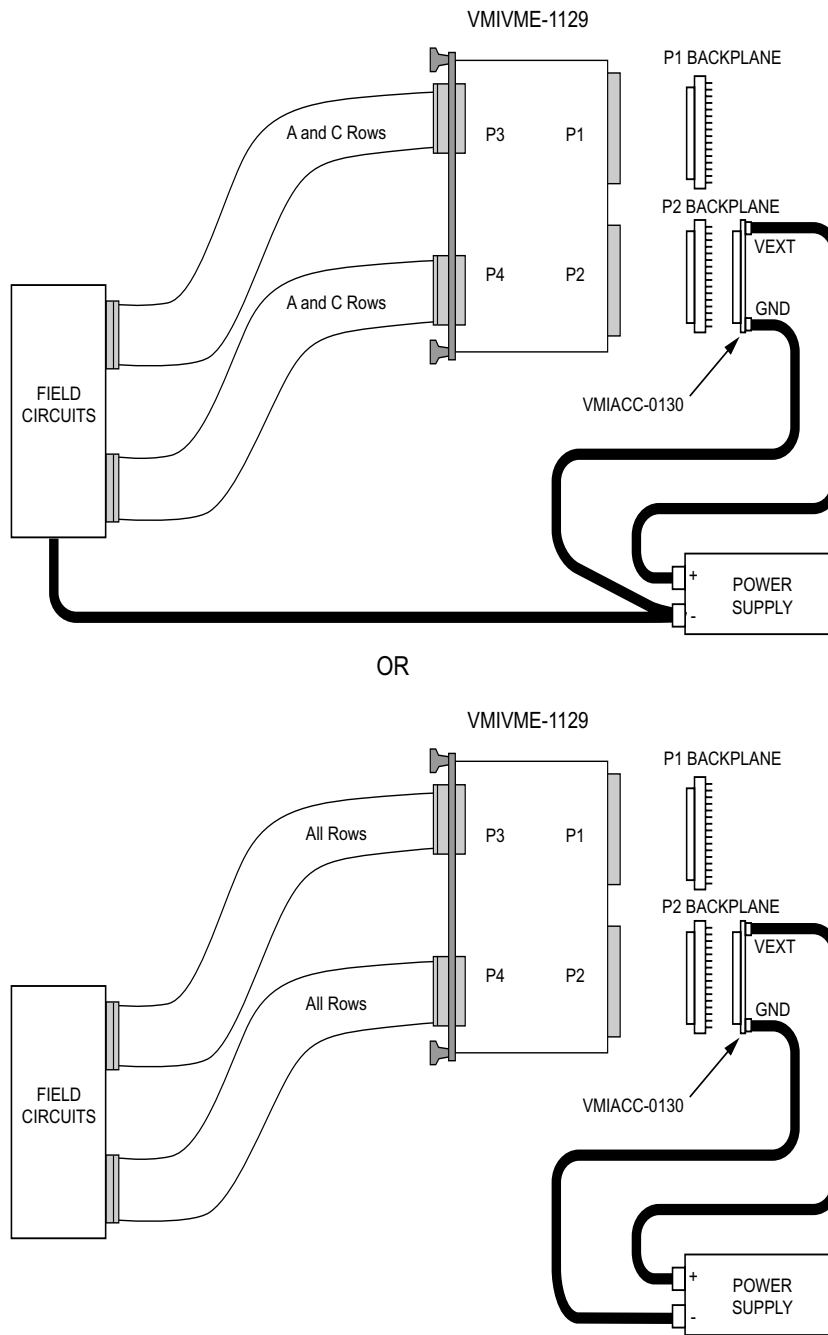


Figure 1. P2 External Power Connections