

- Standard features
 - PCI mezzanine card (PMC)-based Gbit Ethernet adapter
 - 1000SX fiber interface via front panel SC duplex fiber connector
 - IEEE 802.3/802.3x/802.3z compliant
 - 64-bit/66 MHz interface for optimum performance
 - 64 Kbyte packet buffer
 - PCI revision 2.2 compliant
 - Universal PMC signaling operation

INTRODUCTION — The VMIPMC-6100 is a PMC-based Gbit Ethernet adapter. This product is ideal for applications requiring 1000SX Ethernet.

The VMIPMC-6100 uses the Intel® 82543GC Gbit Ethernet MAC. The 82543GC provides a 32-/64-bit, 33/66 MHz interface compliant to PCI Rev. 2.2. It also has a 64 Kbyte packet buffer to maintain high performance. A fiber 1000SX interface is provided via the PMC front panel using a duplex fiber connector. Drivers are available for download, making the VMIPMC-6100 easy to integrate with single-board computer (SBC) products such as VMIC's VMEbus and CompactPCI® offerings.

FUNCTIONAL CHARACTERISTICS

PMC: Universal +5 V and + 3.3 V PMC (PCI) signaling is supported

PHYSICAL/ENVIRONMENTAL

Temperature: 10 to 50 °C operating range

Relative Humidity: 10 to 90 percent (noncondensing) recommended operating range

MTBF: 888,940 hours (Bellcore)

ELECTRICAL CHARACTERISTICS

PMC Power: + 5 V, 1.3 A maximum


PMC Signaling: Universal 3.3 or 5 V, 32-/64-bit, 33/66 MHz

SOFTWARE

Windows NT®/Windows® 2000, Linux, and Solaris drivers supported.

NETWORK CONNECTIONS

- Fiber-optic (multimode) with SC-type connectors
 - 50 μ multimode fiber (316 m half duplex, 550 m full duplex length)
 - 62.5 μ multimode fiber (275 m length)

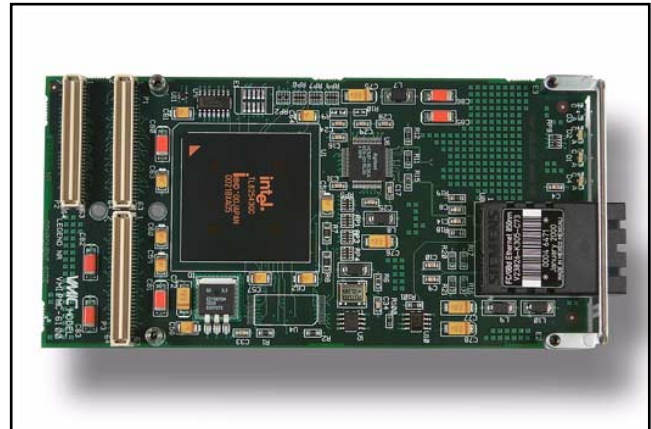

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Intel is a registered trademark of Intel Corporation. Windows and Windows NT are registered trademarks of Microsoft Corporation. CompactPCI is a registered trademark of PCI Industrial Computer Manufacturers' Group. Other registered trademarks are the property of their respective owners.

Ordering Options							
Feb. 6, 2002 800-756100-000 C	A	B	C	—	D	E	F
VMIPMC-6100	—	0		—			
A = Transmission Mode 0 = Multimode Fiber Optic (SC-Type Connectors) 1 = Single-Mode Fiber Optic (SC-Type Connectors) B = 0 (Option reserved for future use) C = Temperature Specifications 0 = Standard Product 1 = Extended Temperature							
Cable Specifications							
Fiber-Optic Cable - Multimode; (62.5 Micron core); Single-Mode (9 Micron core).							
Fiber-Optic Cable Assemblies	A	B	C	—	D	E	F
VMICBL-000-F4	—	0		—			
ABC = Cable Lengths 000 = .5 ft (0.15 m) 011 = 350 ft (106.68 m) 001 = 1 ft (.31 m) 012 = 500 ft (152.15 m) 002 = 5 ft (1.52 m) 013 = 574 ft (175 m) 003 = 10 ft (3.04 m) 014 = 656 ft (200 m) 004 = 25 ft (7.62 m) 015 = 820 ft (250 m) 005 = 50 ft (15.24 m) 016 = 1,000 ft (304.30 m) 006 = 80 ft (24.40 m) 017 = 1,148 ft (350 m) 007 = 100 ft (30.49 m) 018 = 1,312 ft (400 m) 008 = 150 ft (45.72 m) 019 = 1,500 ft (456.45 m) 009 = 200 ft (60.98 m) 020 = 1,640 ft (500 m) 010 = 250 ft (76.20 m)							
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 E-mail: info@vmic.com Web Address: www.vmic.com Copyright © August 2000 by VMIC Specifications subject to change without notice.							