



502 and 506 Polarizing Bars for DIN 41612 Connectors

- The 502 and 506 polarizing bars are used to key a specific board to a specific backplane slot
- The user defines the keying sequence by removing selected tabs from the 502 and 506 polarizing bars
- The 502 polarizing bar mounts directly to the card edge connector on the plug-in board
- The 506 polarizing bar mounts directly to the backplane connector

Note: The Polarizing Bars are screwed together with the connector, no additional drill holes are required.

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Other registered trademarks are the property of their respective owners.

PHOTO NOT AVAILABLE

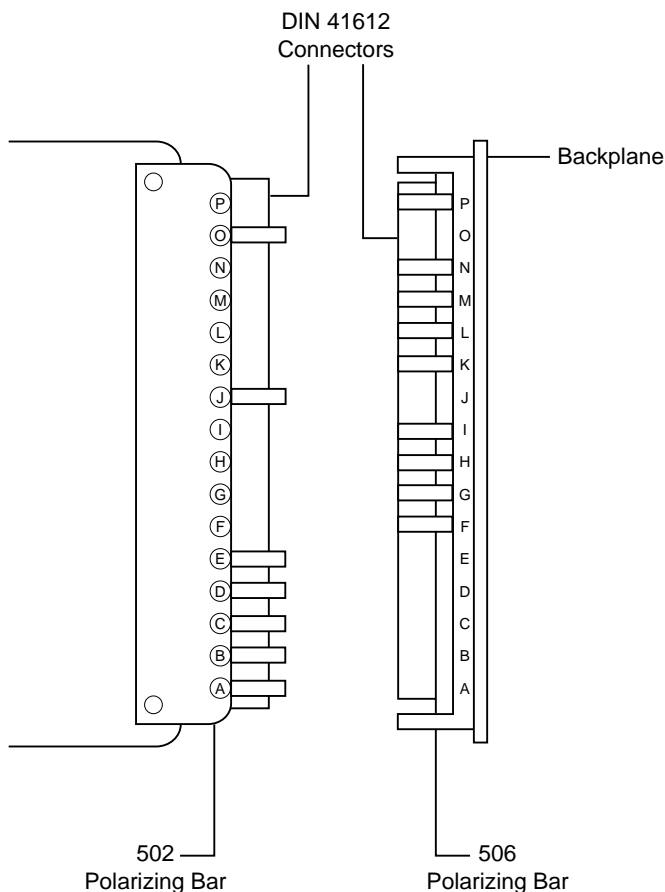


Figure 1. 502 and 506 Polarizing Bars

Ordering Options							
March 18, 1996 800-800502-000 A	A	B	C	-	D	E	F
VMIACC-0502	-	5	0	-			
AB = 50 C = Mounting Position 0 = Mounts Directly to the Card Edge Connector (ERNI 502) 1 = Mounts Directly to the Backplane Connector (ERNI 506)							
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 E-mail: info@vmic.com Web Address: www.vmic.com Copyright © February 1996 by VMIC Specifications subject to change without notice.							