

Large Acceptance Proton Form Factor Ratio Measurement up to 12 GeV^2 using Recoil Polarization Method

B.Wojtsekhowski for the SBS collaboration

Large Acceptance Proton Form Factor Ratio Measurement at 13 and 15 GeV² using Recoil Polarization Method Experiment E12-07-109

E.Cisbani, M.Jones, N.Lyanage,
L.Pentchev, A.Puckett, B.Wojtsekhowski

Electron-nucleon elastic scattering


Nucleon current, one-photon approximation, $\alpha_{em} = 1/137$,

$$\mathcal{J}_{hadron}^{\mu} = ie\bar{N}(p_f) [\gamma^{\nu} F_1(Q^2) + \frac{i\sigma^{\mu\nu}q_{\nu}}{2M} F_2(Q^2)] N(p_i)$$

$$\frac{d\sigma}{d\Omega}(E, \theta) = \frac{\alpha^2 E' \cos^2(\frac{\theta}{2})}{4E^3 \sin^4(\frac{\theta}{2})} [(F_1^2 + \kappa^2 \tau F_2^2) + 2\tau (F_1 + \kappa F_2)^2 \tan^2(\frac{\theta}{2})]$$

$$\frac{d\sigma}{d\Omega}(E, \theta) = \sigma_M \left[\frac{G_E^2 + \tau G_M^2}{1 + \tau} + 2\tau G_M^2 \tan^2(\frac{\theta}{2}) \right]$$

The nucleon structure in terms of GPDs

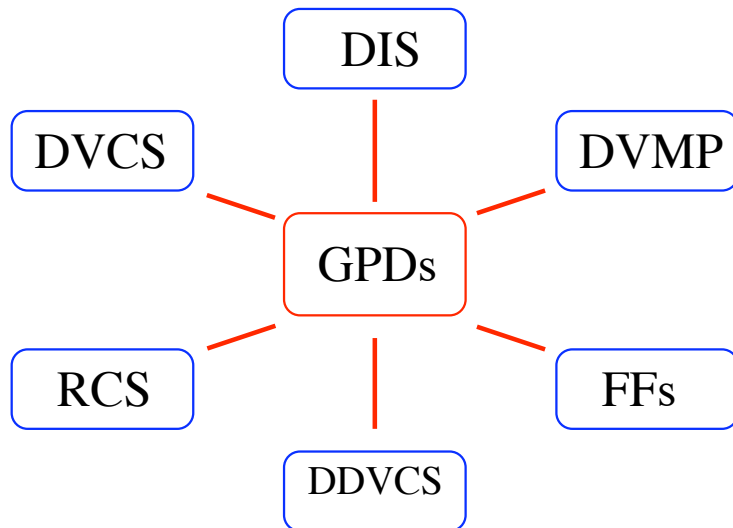

Reduction formulas at $\xi = t = 0$
for **DIS** and $\xi = 0$ for **FFs**





$$H^q(x, \xi = 0, t = 0) = q(x)$$

$$\tilde{H}^q(x, \xi = 0, t = 0) = \Delta q(x)$$



$$\int_{-1}^{+1} dx H^q(x, 0, Q^2) = F_1^q(Q^2)$$

$$\int_{-1}^{+1} dx E^q(x, 0, Q^2) = F_2^q(Q^2)$$

The nucleon FFs

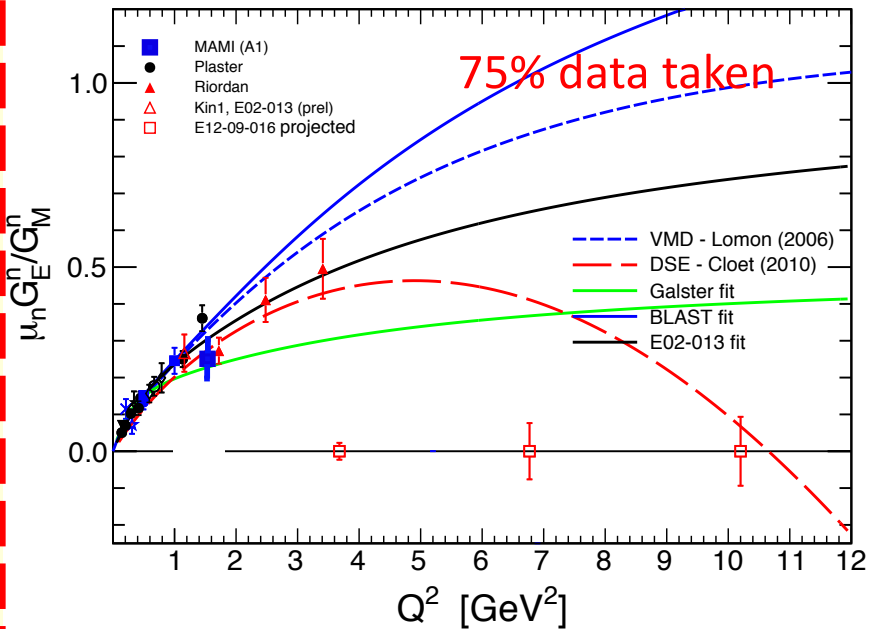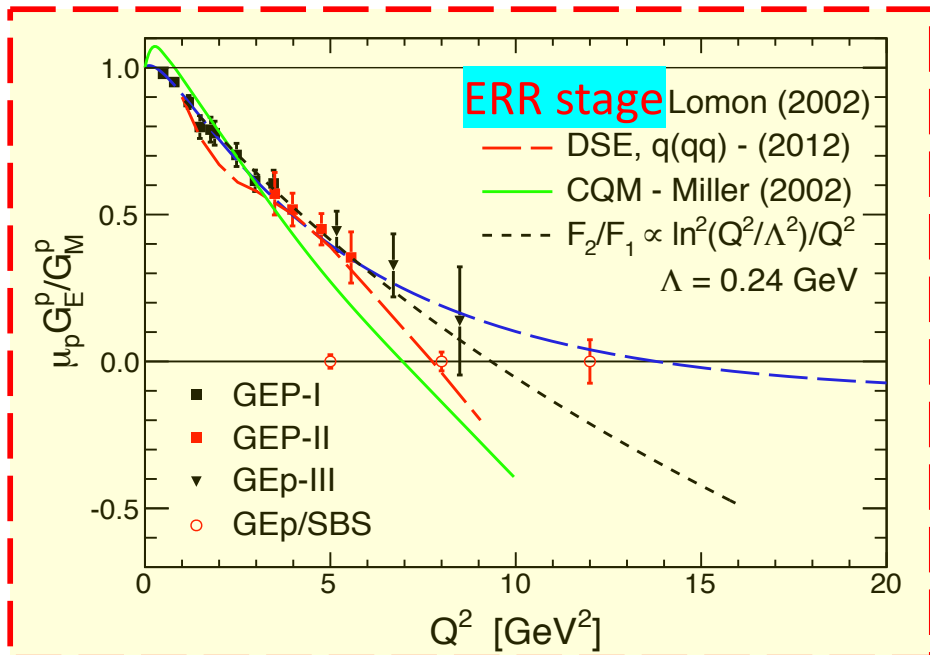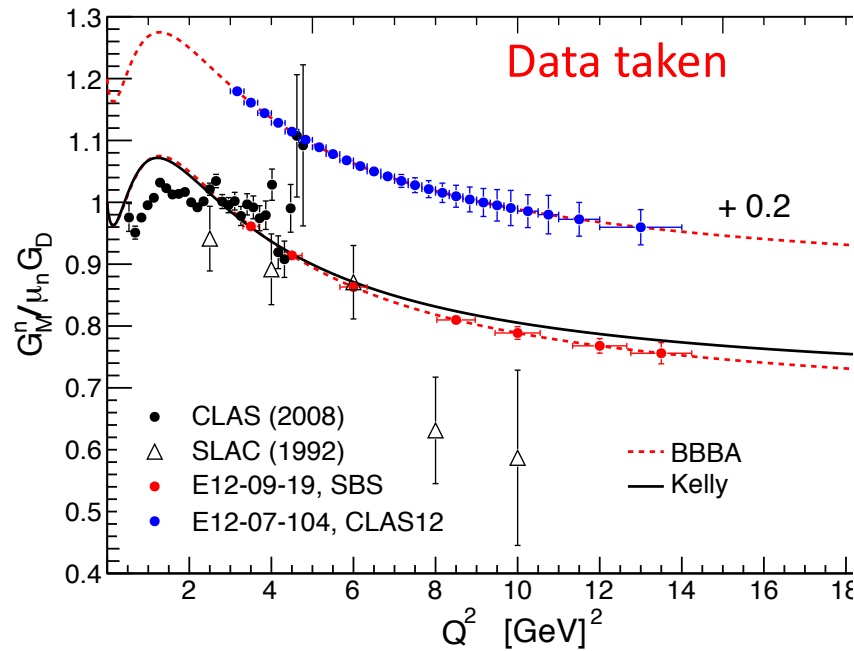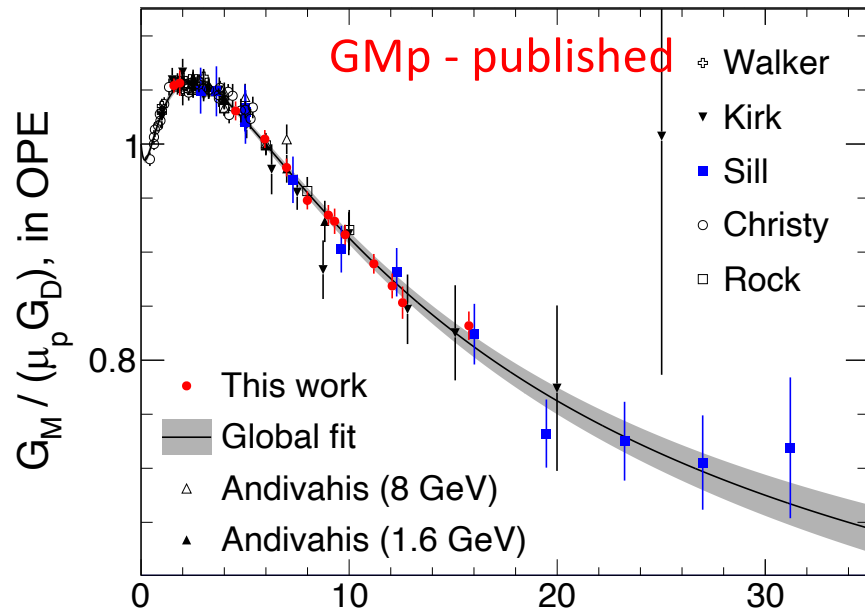

Method: Focal Plane Polarimeter

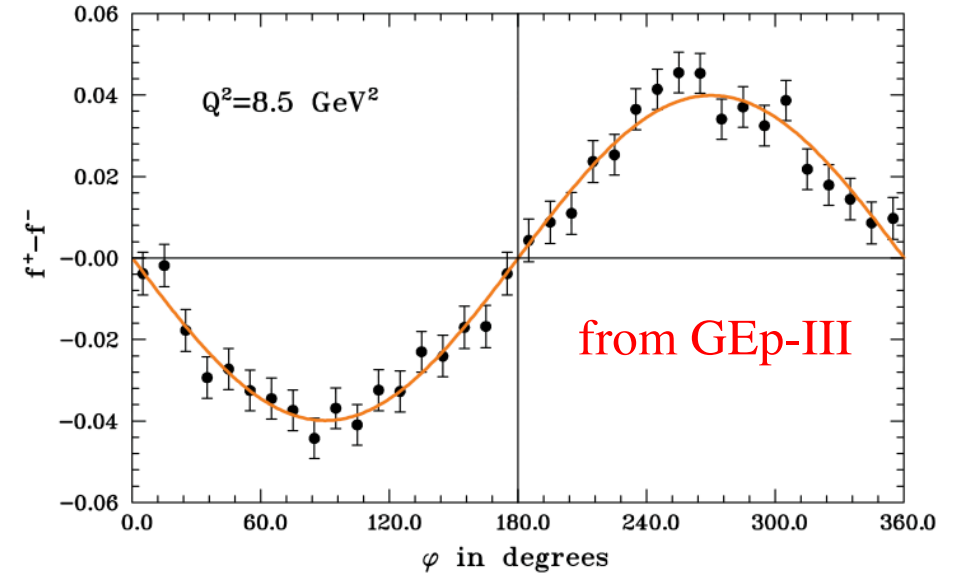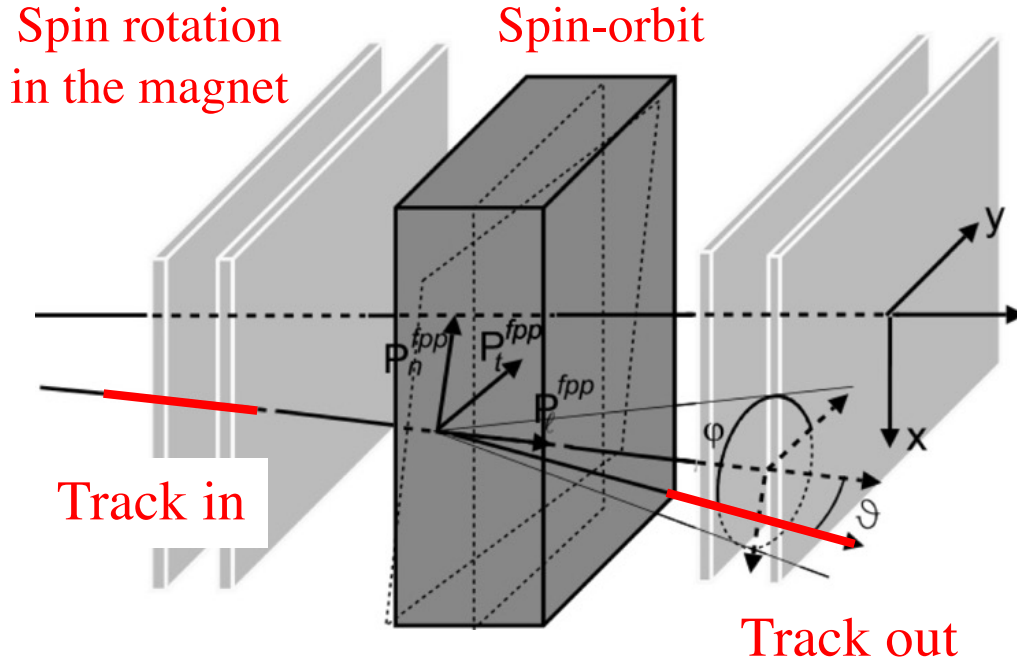

$$f^\pm(\vartheta, \varphi) = \frac{\epsilon(\vartheta, \varphi)}{2\pi} \left[1 \pm A_y (P_x^{fpp} \sin \varphi - P_y^{fpp} \cos \varphi) \right]$$


where $\pm$ refers to electron beam helicity

$$A = \frac{f^+ - f^-}{f^+ + f^-} = A_y \left(P_x^{fpp} \sin \varphi - P_y^{fpp} \cos \varphi \right), P_x^{fpp} \text{ is calculated}$$

$$\mu_p \frac{G_E^p}{G_M^p} = -\mu_p \frac{E_e + E'_e}{2M_p} \tan \frac{\theta_e}{2} \left(\frac{P_x^{fpp}}{P_y^{fpp}} \sin \chi_\theta + \gamma_p (\mu_p - 1) \Delta \phi \right)$$

Method: Focal Plane Polarimeter

A_Y analyzing power vs.
inverse proton momentum

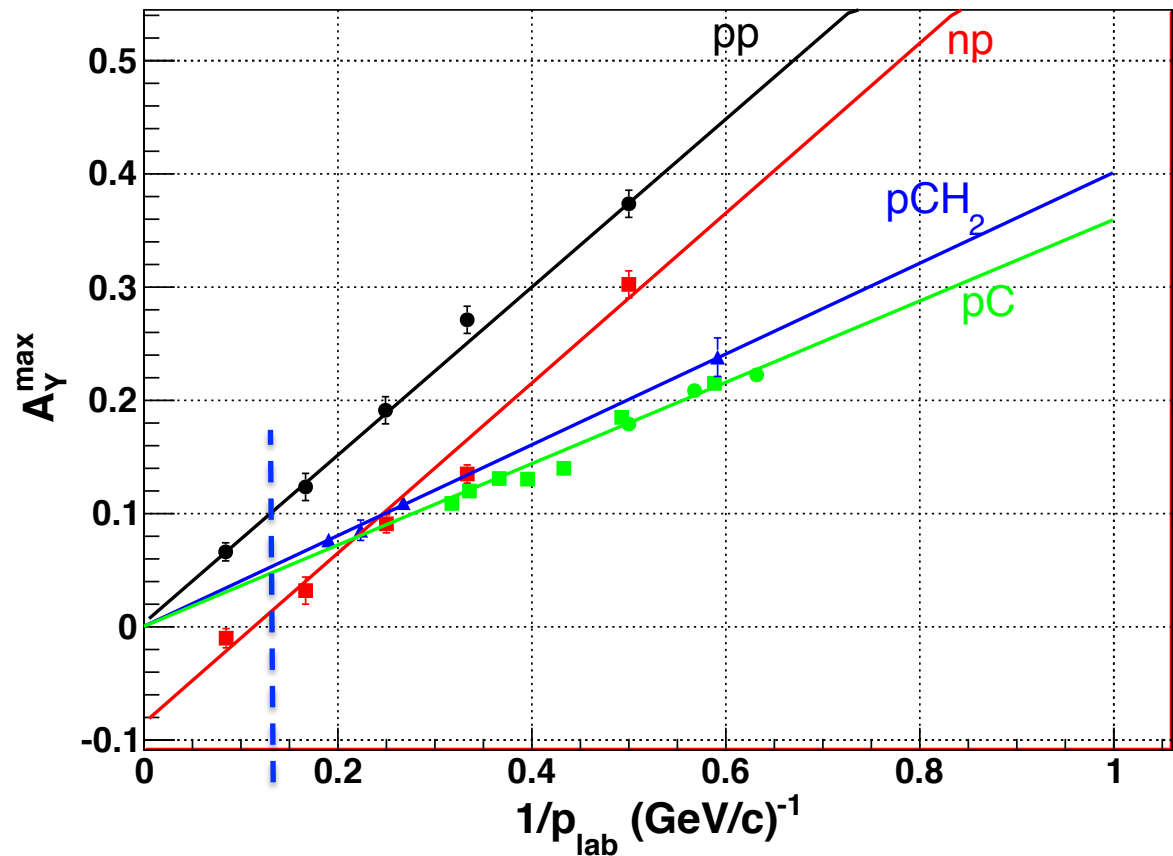

proton momentum will be $\sim 7.3 \text{ GeV/c}$

$$\mu_p \frac{G_E^p}{G_M^p} = -\mu_p \frac{E_e + E'_e}{2M_p} \tan \frac{\theta_e}{2} \left(\frac{P_x^{fpp}}{P_y^{fpp}} \sin \chi_\theta + \gamma_p (\mu_p - 1) \Delta\phi \right)$$

Challenges in this experiment

$$\text{Form factor} \propto Q^{-4}$$

$$\text{Cross section} \propto E^2/Q^4 \times Q^{-8}$$

$$\begin{aligned} \text{Figure-of-Merit} &\propto A_Y^2 \times \sigma \times \Omega \\ &\propto E^2/Q^{16} \end{aligned}$$


Need large statistics $\Rightarrow$ luminosity and **solid angle**

Max luminosity $\rightarrow$ **large background, radiation damage**


Large solid angle $\rightarrow$ small bend $\rightarrow$ **huge background**

Solution is a modern tracking detector - **GEM**

Concept of a large solid angle proton arm

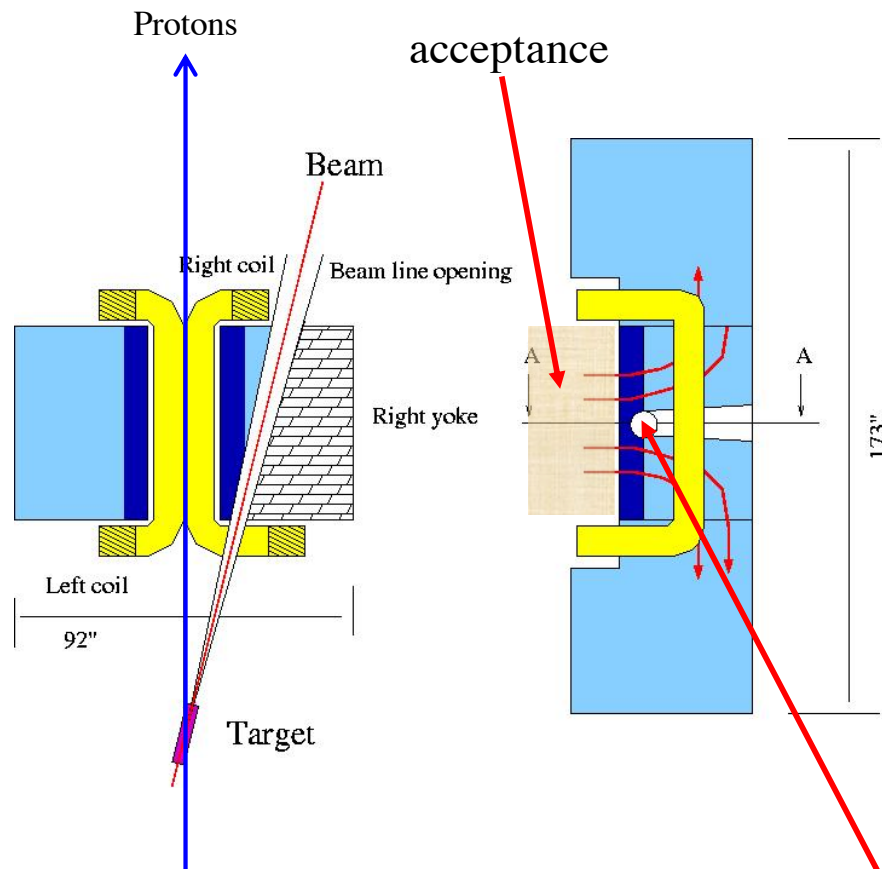

Magnet: 48D48 - 46 cm gap, 2-3 Tesla*m
Solid angle is 70 msr at angle 15 deg.
GEM chambers with 70 μ m resolution
momentum resolution is 0.5% for 5 GeV/c
angular resolution is 0.5 mr

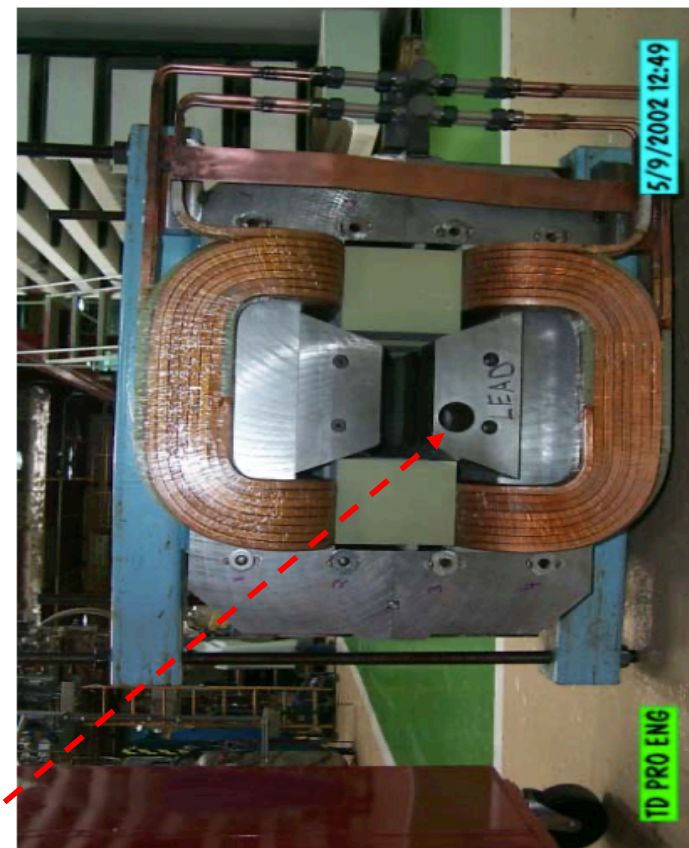

beam


SBS magnet placed near the pivot



SBS magnet parameters
and operation confirmed
in GMn and GEn runs




Proton arm: calorimeter

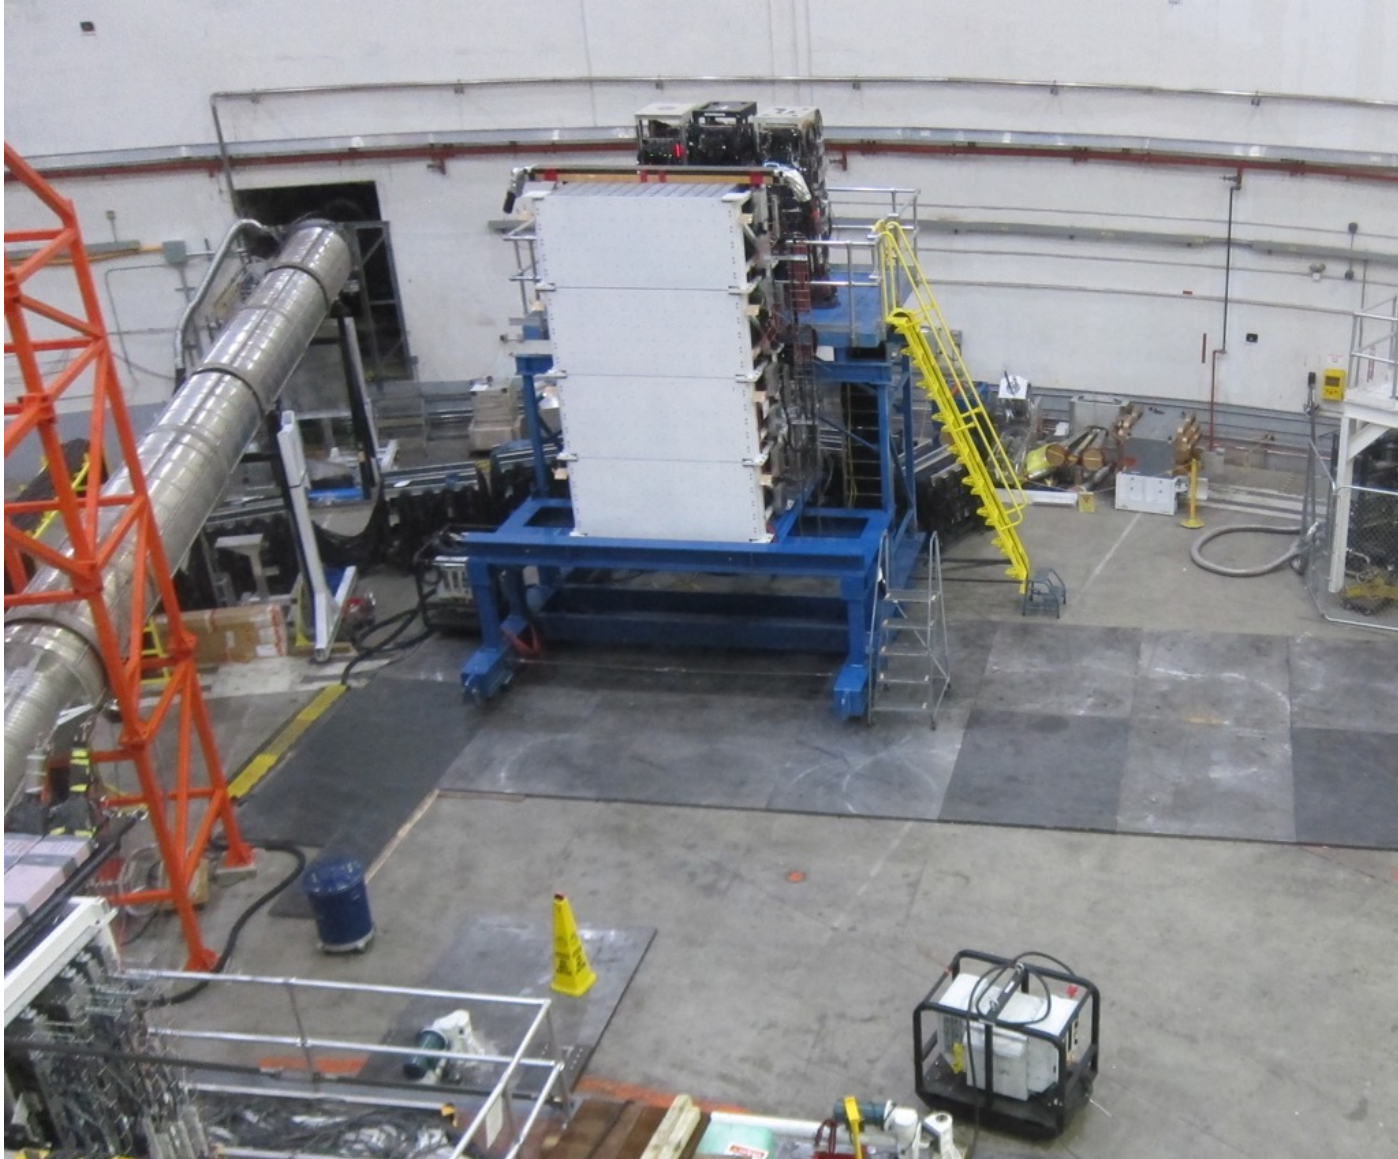


HCAL parameters confirmed in GMn and GEn runs

SBS trackers in the polarimeter



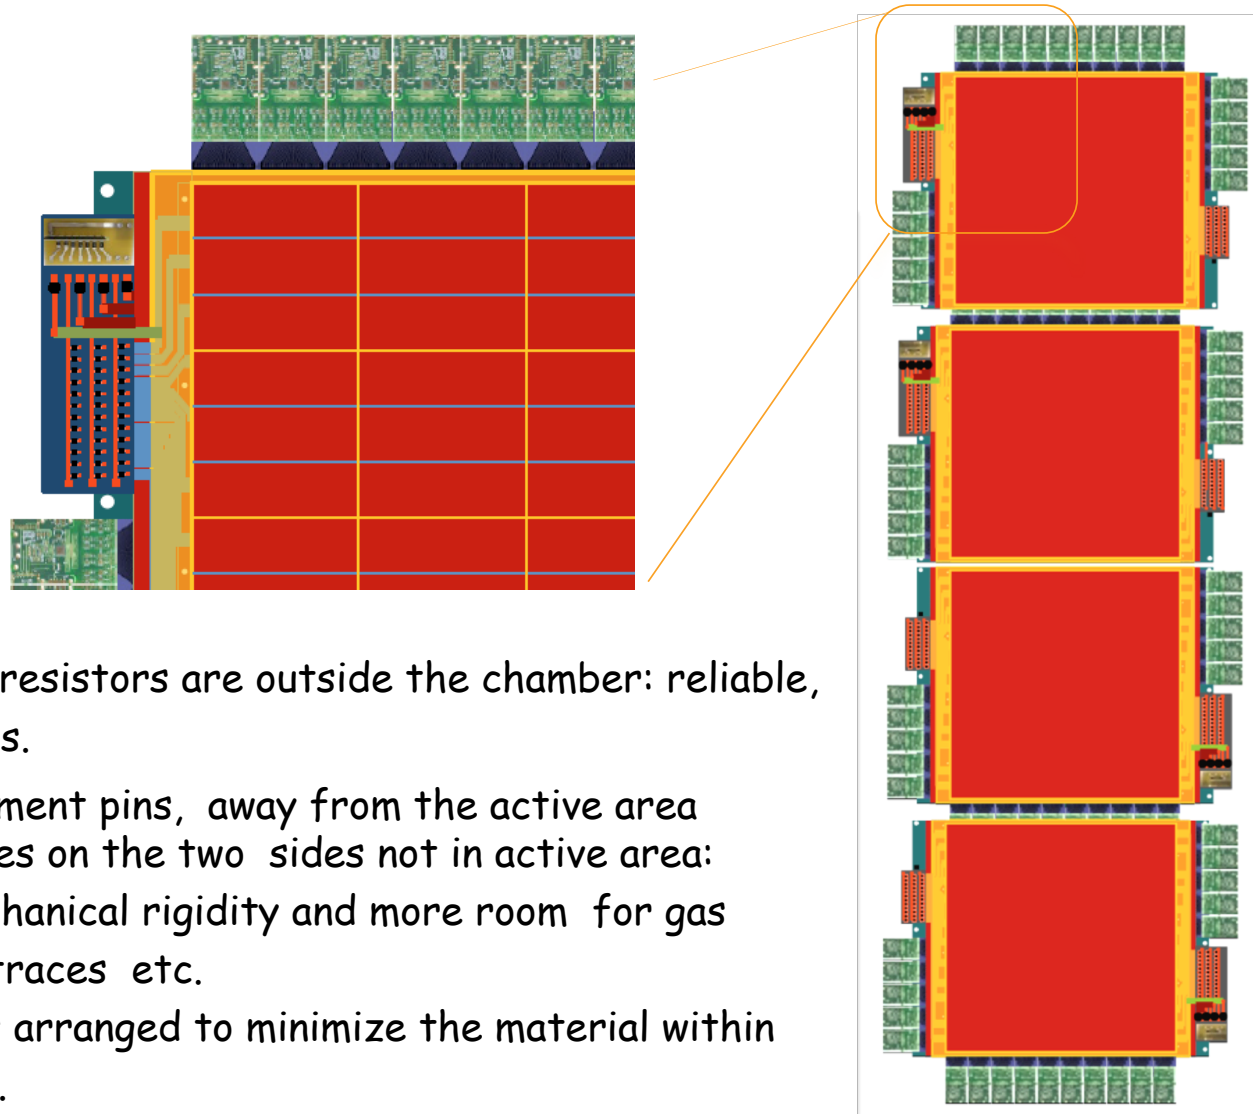


- ❑ Protection resistors are outside the chamber: reliable, easy access.
- ❑ Large alignment pins, away from the active area
- ❑ Wide frames on the two sides not in active area: better mechanical rigidity and more room for gas inlets, HV traces etc.
- ❑ Electronics arranged to minimize the material within active area.

SBS trackers under tests during GEn run

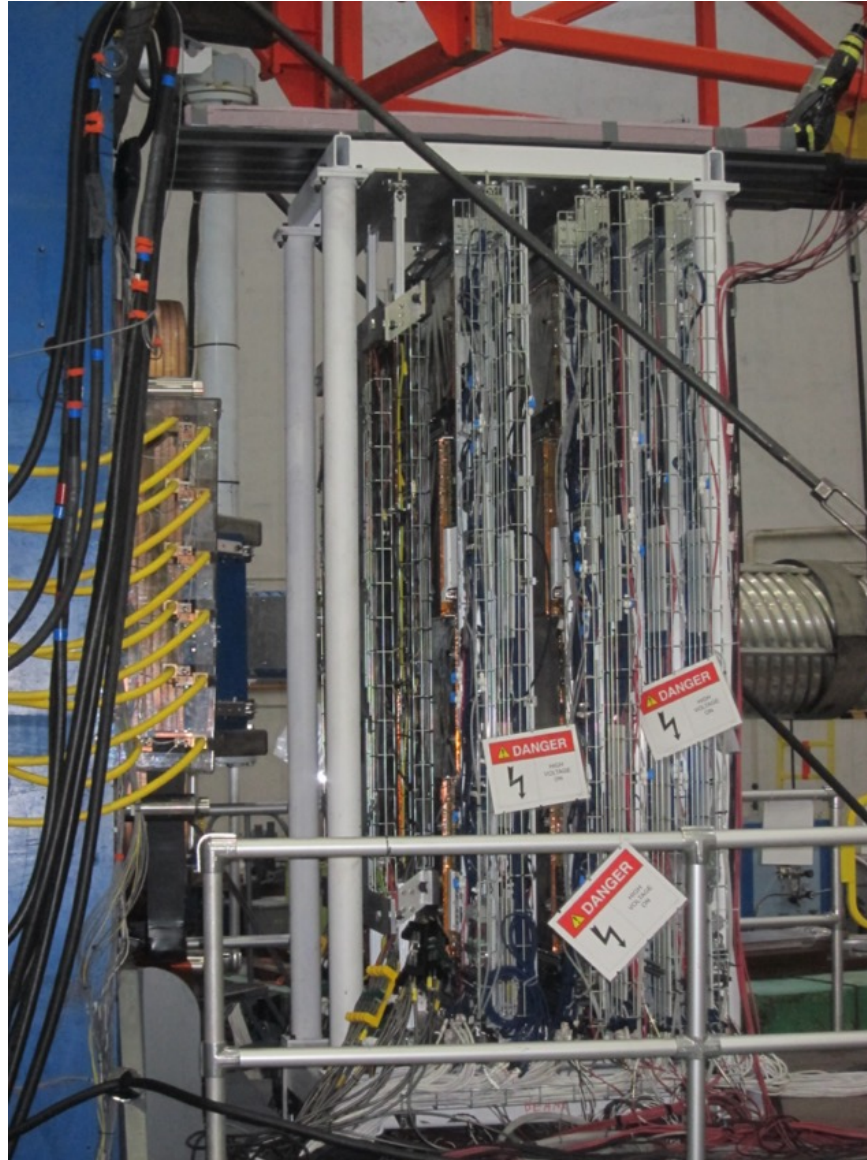


Electron arm: calorimeter CAD model

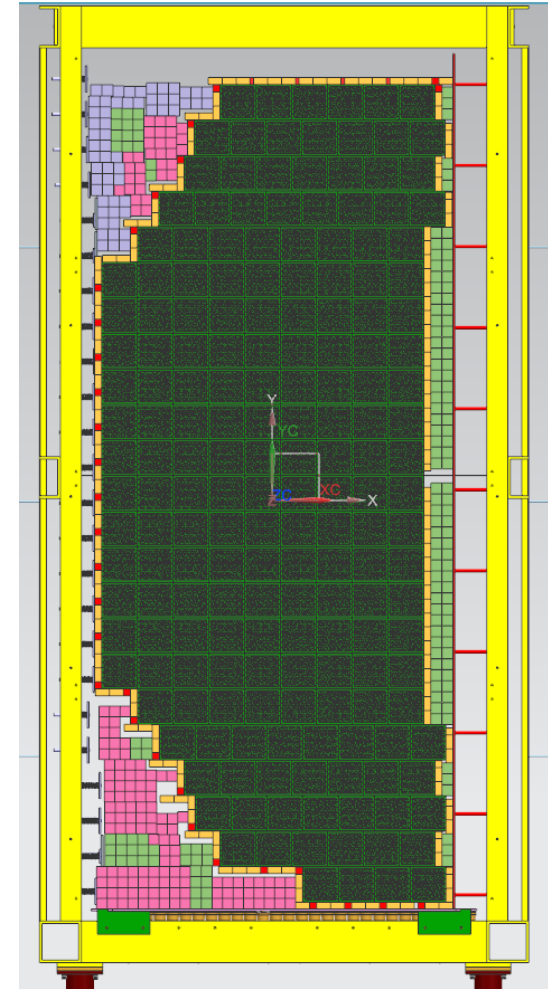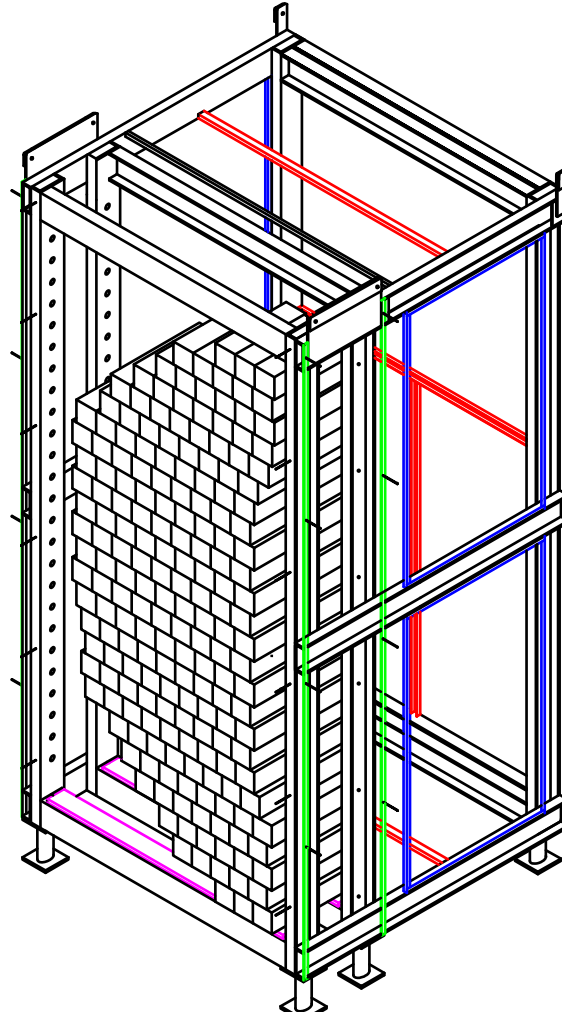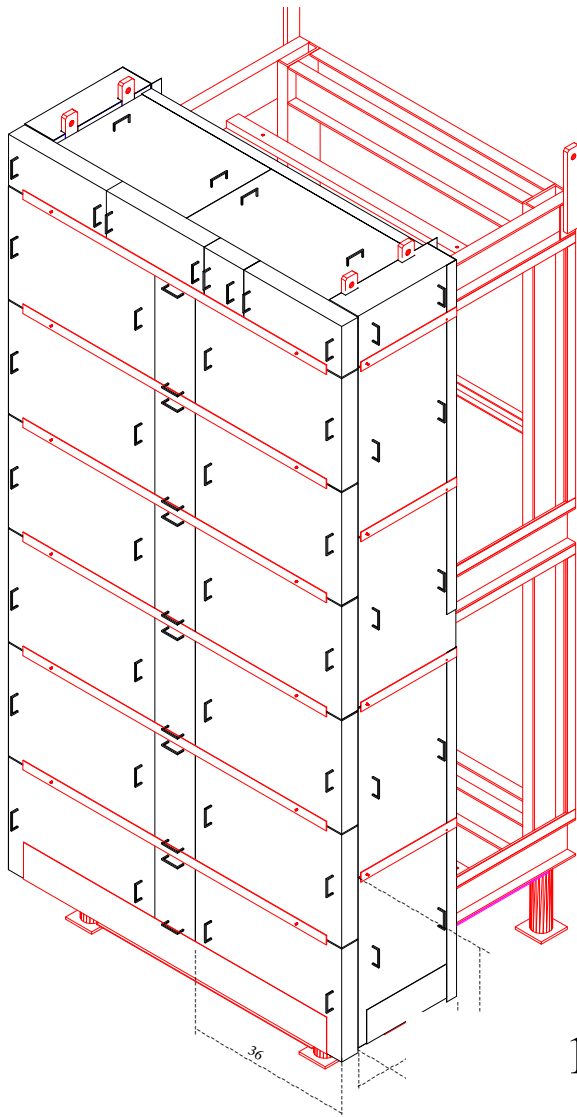

184 SMs (each is a 3x3 group of lead-glass modules),
Elevated temperature of the glass (225-185 C)
provides **continuous** annealing of radiation damage
(**confirmed with actual beam test** of the 4x4 prototype)

Electron arm: coordinate detector

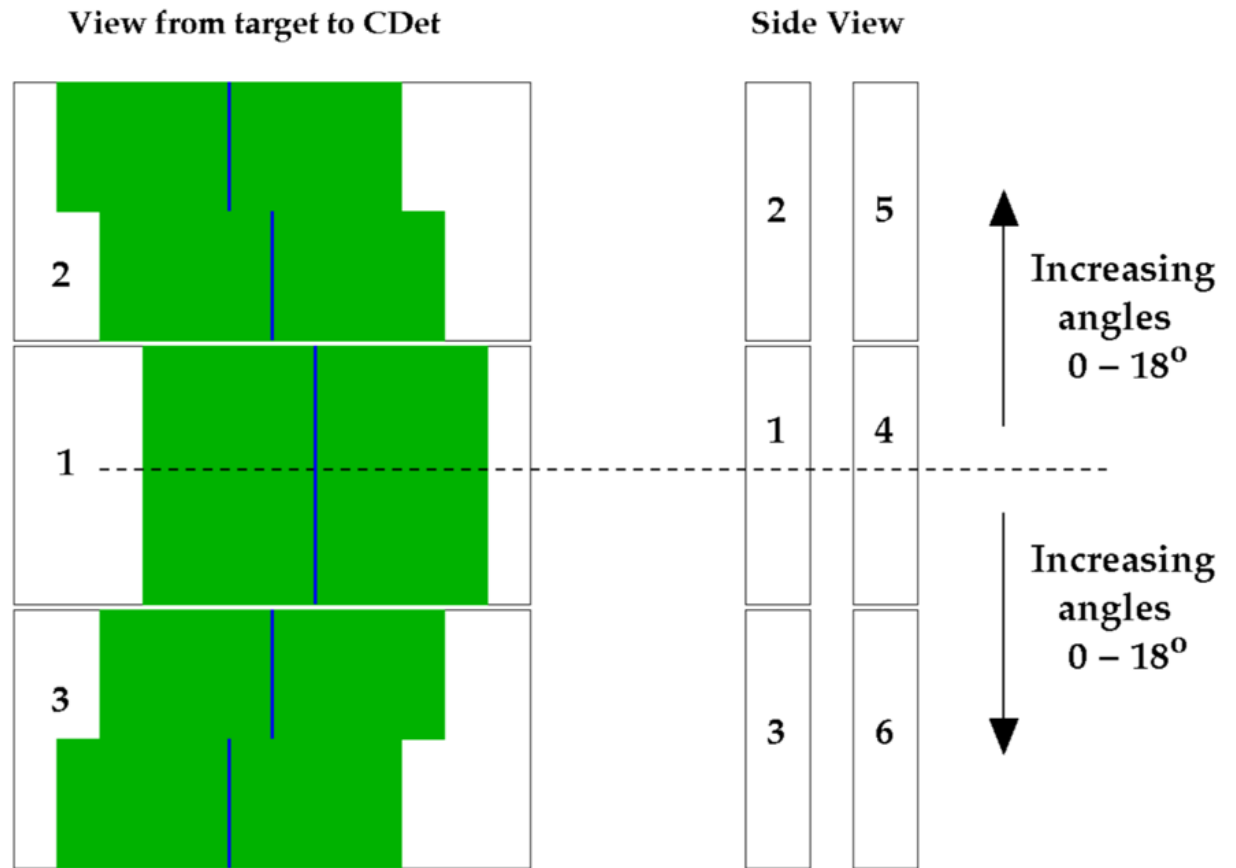


Two layers: 6 modules (each has 16 x 14 x 2 counters)

Experiment: Layout and Parameters

$$H(\vec{e}, e' \vec{p})$$

High Q^2 kinematics

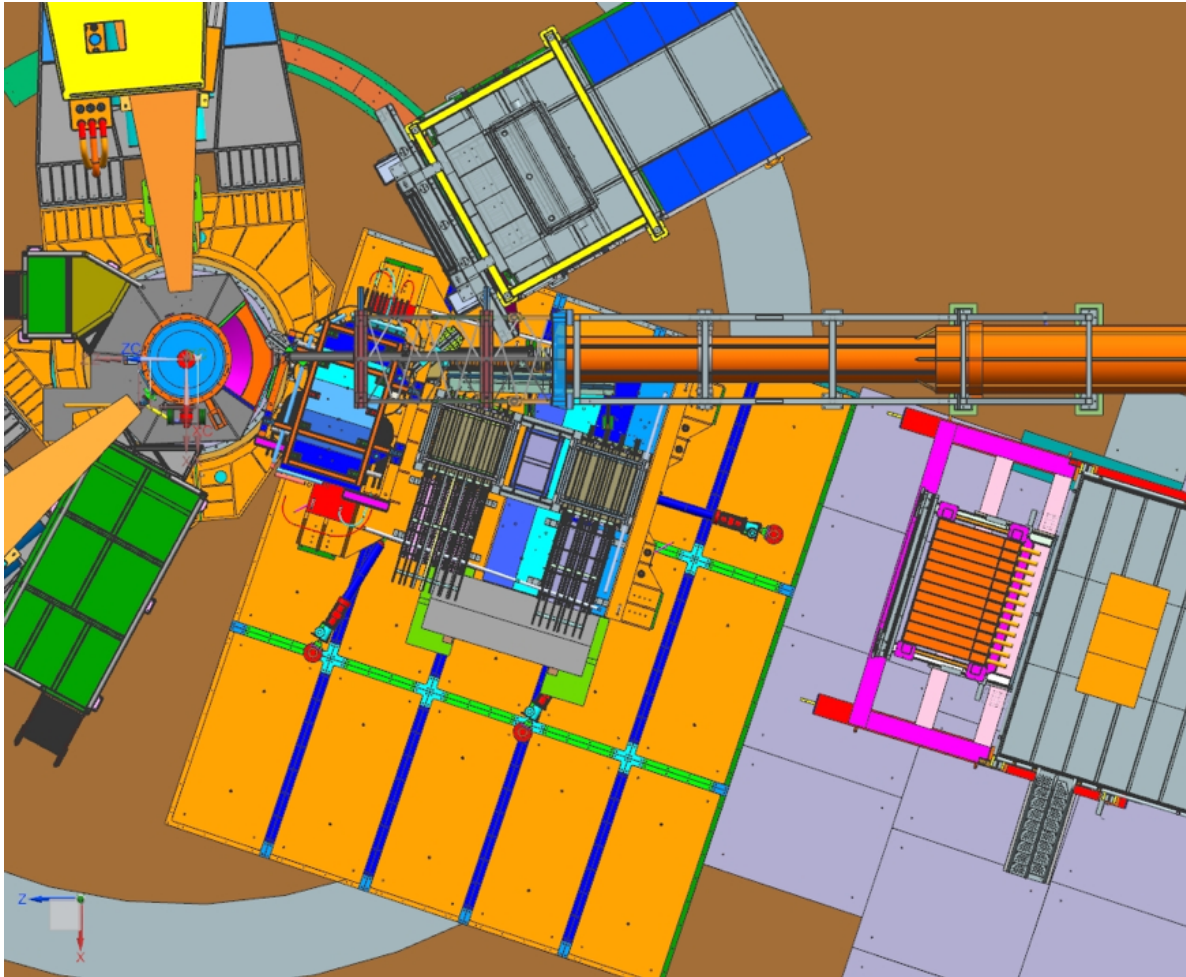

Beam: 75 μA , 85% polarization

Target: 30 cm liquid H_2


Electron arm at 30° , covers
 Q^2 range from 11-13 GeV^2

Proton arm at angle 17° , $\Omega \sim$
0.3 of electron one, $\Rightarrow$ 35 msr,
Spin precession angle is $\sim 80^\circ$

Total 45 PAC days of production
time resulting accuracy close to


$$\Delta(\mu G_E^p / G_M^p) = \pm 0.10$$

GEP/SBS Q^2 acceptance and projected accuracy

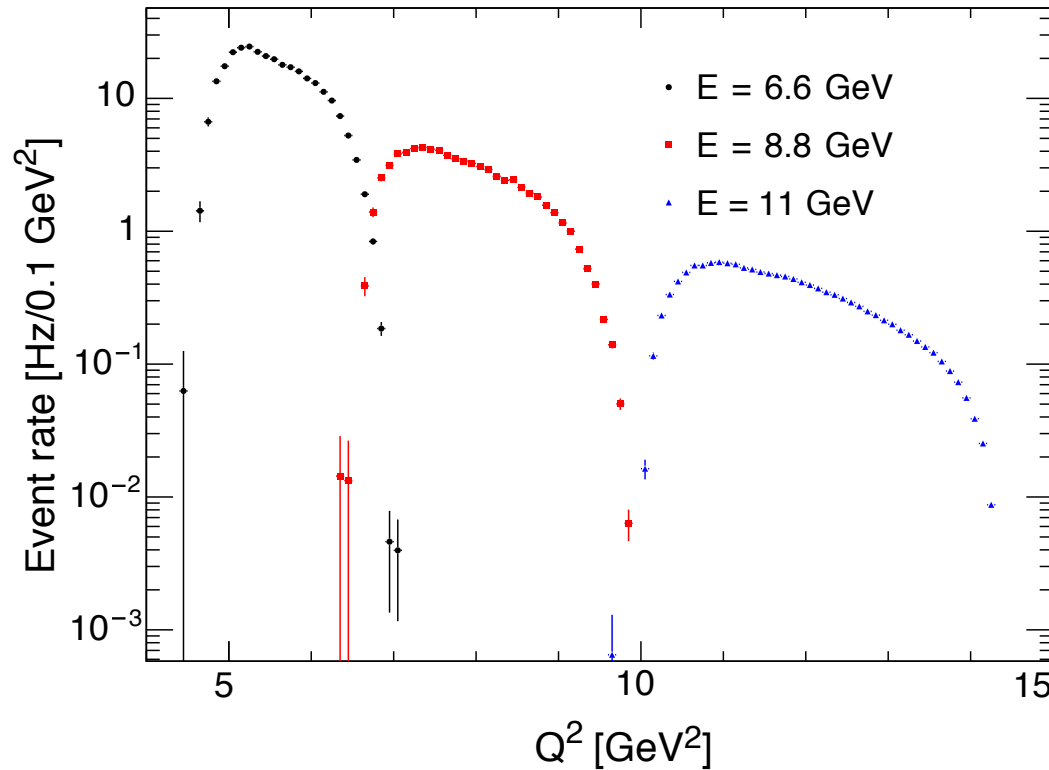

E_{beam} , GeV	Q^2 range, GeV ²	$\langle Q^2 \rangle$ GeV ²	θ_{ECAL} degrees	$\langle E'_e \rangle$, GeV	θ_{SBS} degrees	$\langle P_p \rangle$ GeV	$\langle \sin \chi \rangle$ degrees	Event rate Hz	Days	$\Delta (\mu G_E / G_M)$
6.6	4.5-7.0	5.5	29.0	3.66	25.7	3.77	0.72	291	2	0.029
8.8	6.5-10.0	7.8	26.7	4.64	22.1	5.01	0.84	72	11	0.038
11.0	10.0-14.5	11.7	29.0	4.79	16.9	7.08	0.99	13	32	0.081

The proton GEp form factor

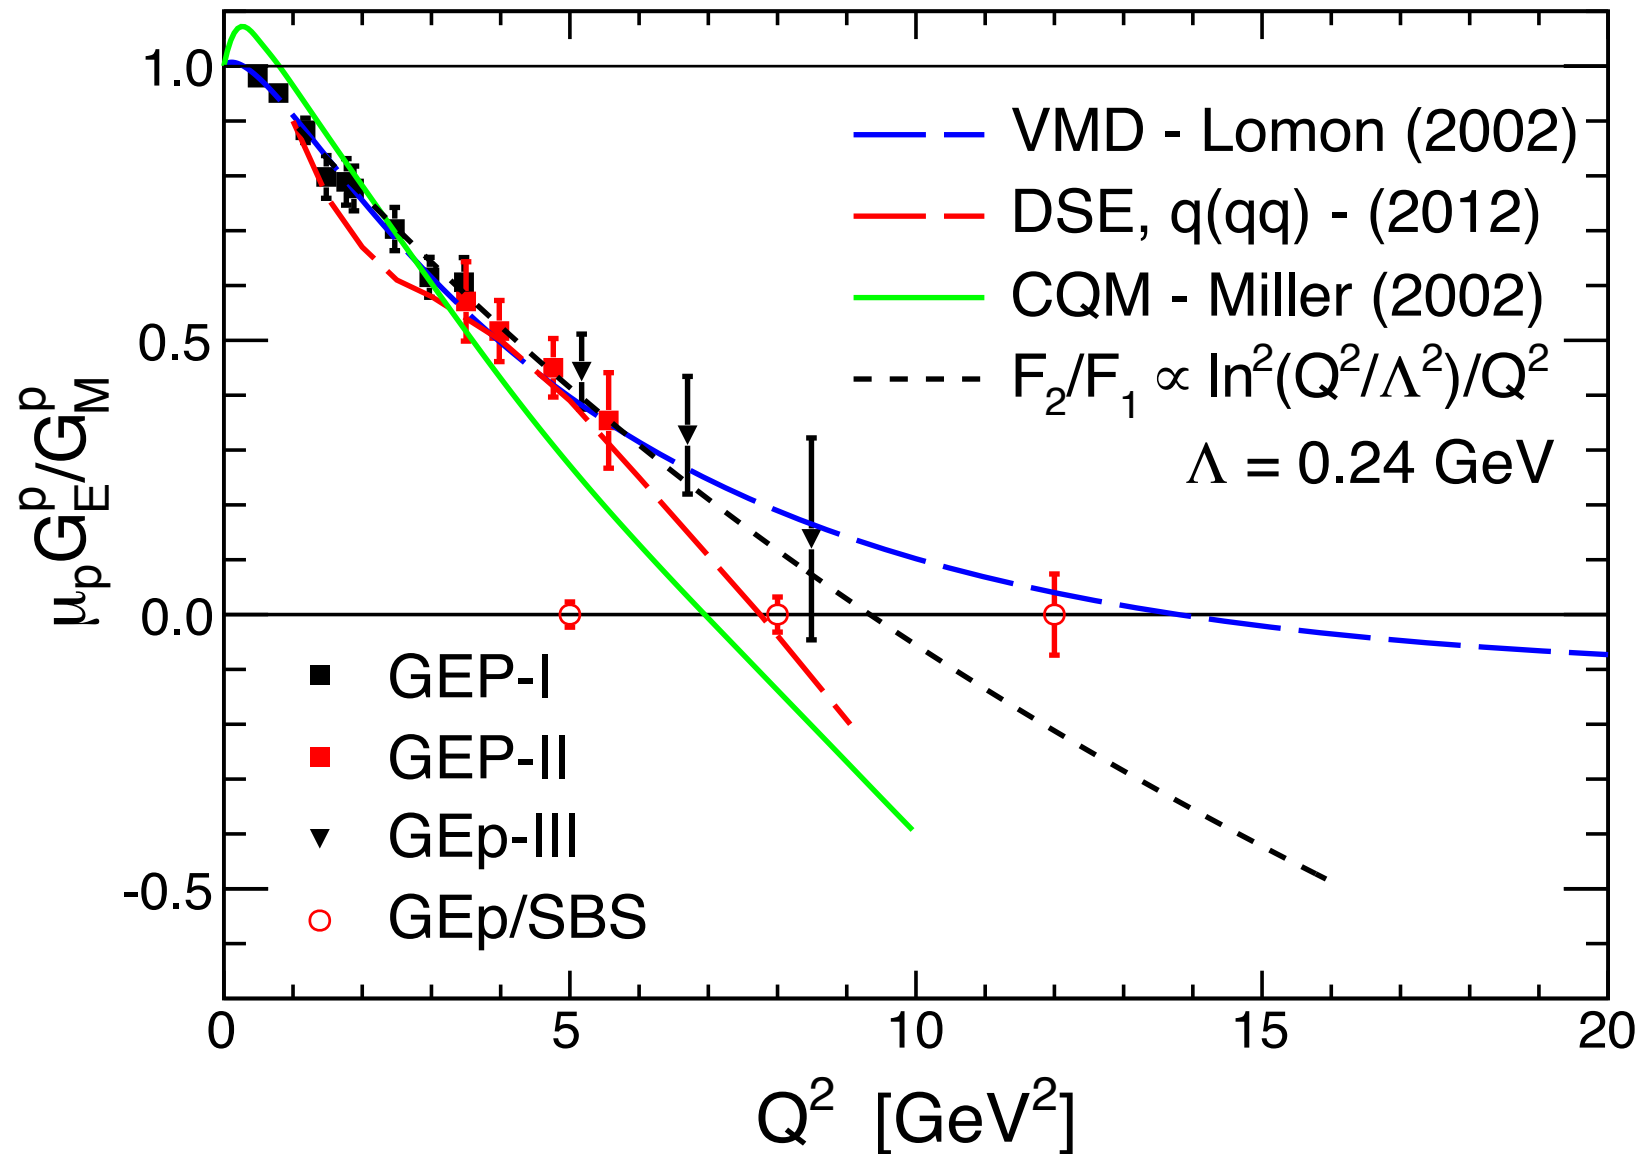

Summary

After years of development the GEP experiment is on track to be ready for installation in spring 2024